Muons, Inc.

Recent Innovations in Muon Beam Cooling

Rolland Johnson, Muons, Inc.

In the last four years, several new techniques to cool muon beams have been invented and are under development supported by DOE Small Business Innovation Research grants. These new techniques will be described as well as their uses to enable high-luminosity, energy-frontier muon colliders and high-intensity neutrino factories based on the superconducting RF cavities being developed for the International Linear Collider.

Muon Beam Cooling Innovations

- <u>Muon Colliders</u> need small muon flux to reduce proton driver demands, detector backgrounds, and site boundary radiation levels. Very effective beam cooling is therefore required to produce high luminosity at the beam-beam tune shift limit and to allow the use of high frequency RF for acceleration to very high energy in recirculating Linacs.

- A <u>Neutrino Factory</u> based on a very cool muon beam which is accelerated in an existing Linac may be very cost-effective.

- Several <u>new ideas</u> have arisen in the last 4 years which are being developed under SBIR grants and have the potential to form muon beams with transverse emittances of a few mm-mr.

- The potential impact of this capability on energy-frontier colliders, Higgs factories, and intense neutrino beams is large. A vigorous <u>R&D program</u> is called for.

Muons Inc. Funding History

Year	Project Title	Expected Funds	Research Partner
2002	Company founded		
2002-5	High Pressure RF Cavities	$600,000	IIT
2003-6	Helical Cooling Channel	$850,000	JLab
2004-5	MANX demo experiment	$ 95,000	FNAL TD
2004-7	Phase Ionization Cooling	$745,000	JLab
2004-7	Hydrogen Cryostat	$795,000	FNAL TD
2005-6*	Reverse Emittance Exch.	$100,000	JLab
2005-6*	Capture, ph. rotation	$100,000	FNAL AD

* Can be extended to phase II for +$750,000 and +2 years

~$1,500,000 spent of $3,285,000 granted so far

- SBIR/STTR funding: Solicitation September, Phase I proposal due December, Winners in May, get $100,000 for 9 months, Phase II proposal due April, Winners June, get $750,000 for 2 years
- Thanks to Dave Sutter, Jerry Peters, Bruce Strauss, LK Len

Muons, Inc. SBIR/STTR Collaboration:

(Small Business Innovation Research grants)

- Fermilab:
  - Victor Yarba, Emanuela Barzi, <u>Licia del Frate</u>, Ivan Gonin, Timer Khabiboulline, Gennady Romanov, Daniele Turrioni
  - Dave Neuffer*, Chuck Ankenbrandt, Al Moretti, Milorad Popovic
- IIT:
  - Dan Kaplan*
- JLab:
  - Slava Derbenev*, Alex Bogacz, <u>Kevin Beard*</u>, Yu-Chiu Chao
- Muons, Inc.:
  - Rolland Johnson*, <u>Mohammad Alsharo'a</u>, Mary Anne Cummings*, <u>Pierrick Hanlet</u>, Bob Hartline, Stephen Kahn*, Moyses Kuchnir, David Newsham, <u>Kevin Paul*</u>, Tom Roberts, <u>Katsuya Yonehara*</u>

- <u>Underlined</u> are accelerator scientists in training, supported by SBIR/STTR grants. First named are PI.
- * COOL05 participants

Muon Colliders: Back to the Livingston Plot

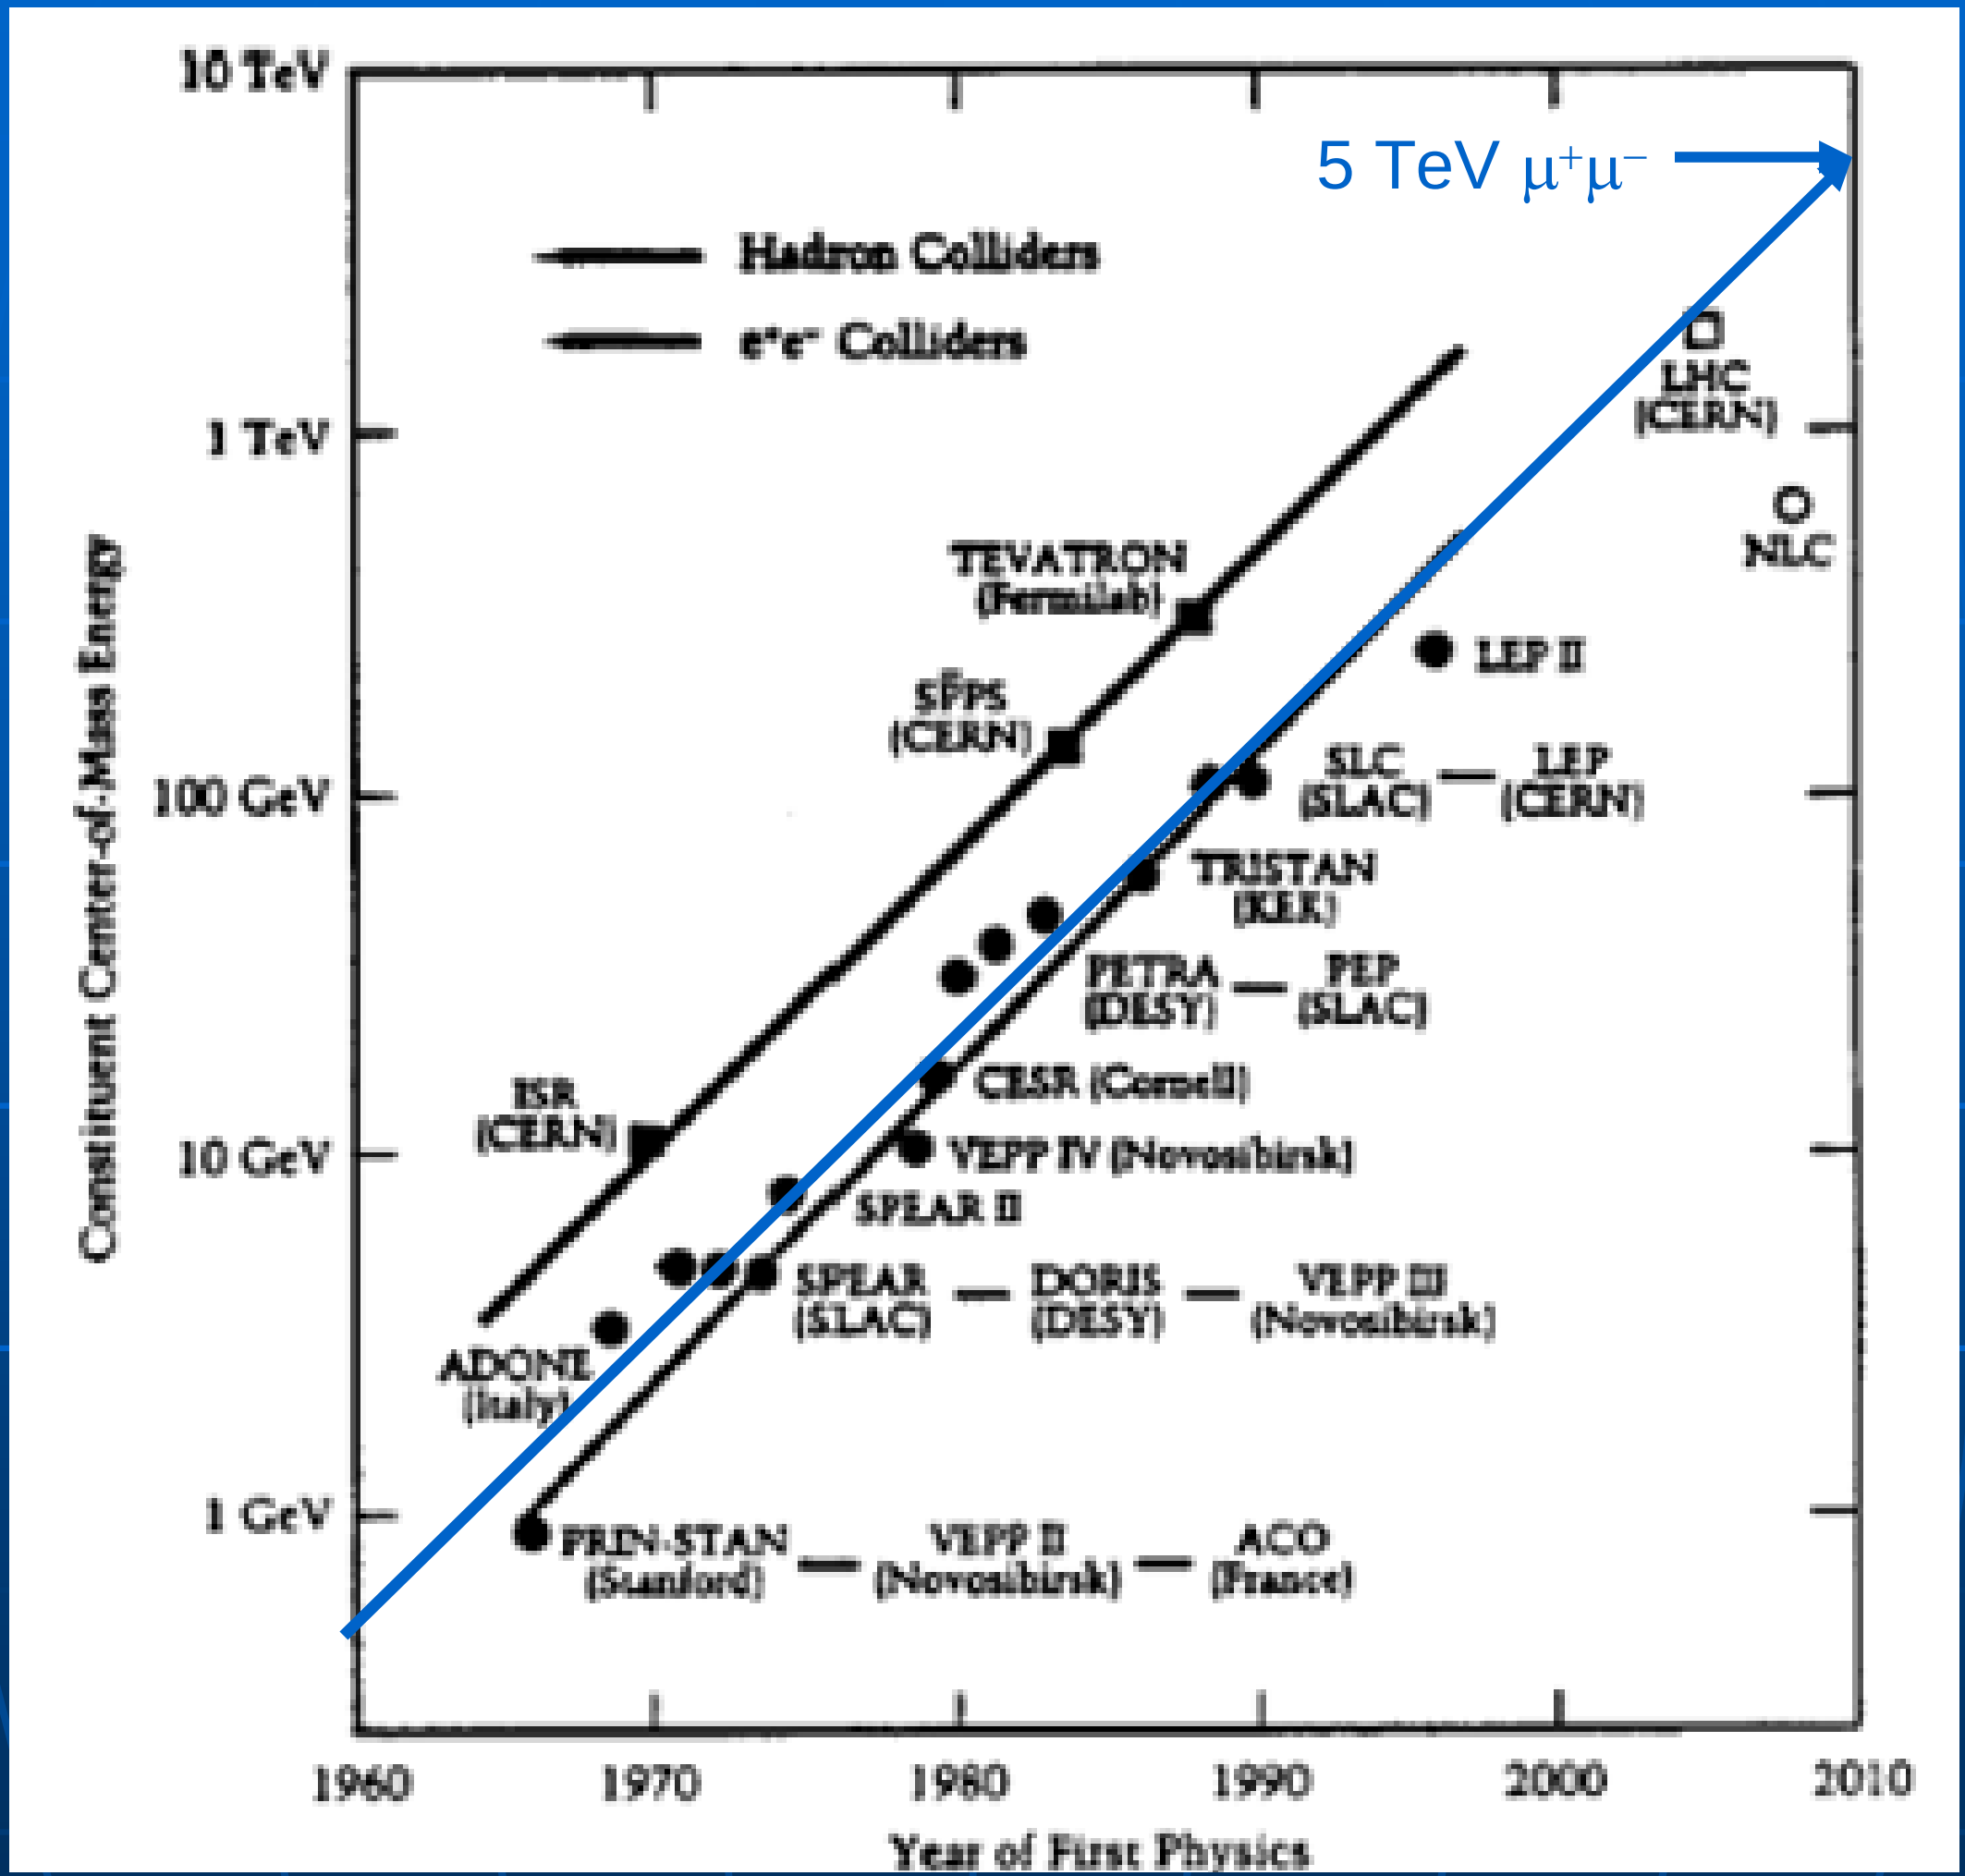

Modified Livingston Plot taken from: W. K. H. Panofsky and M. Breidenbach, Rev. Mod. Phys. 71, s121-s132 (1999)

5 TeV ~ SSC energy reach

~5 X 2.5 km footprint

Affordable LC length, includes ILC people, ideas

High L from small emittance!

1/10 fewer muons than originally imagined:
a) easier p driver, targetry
b) less detector background
c) less site boundary radiation

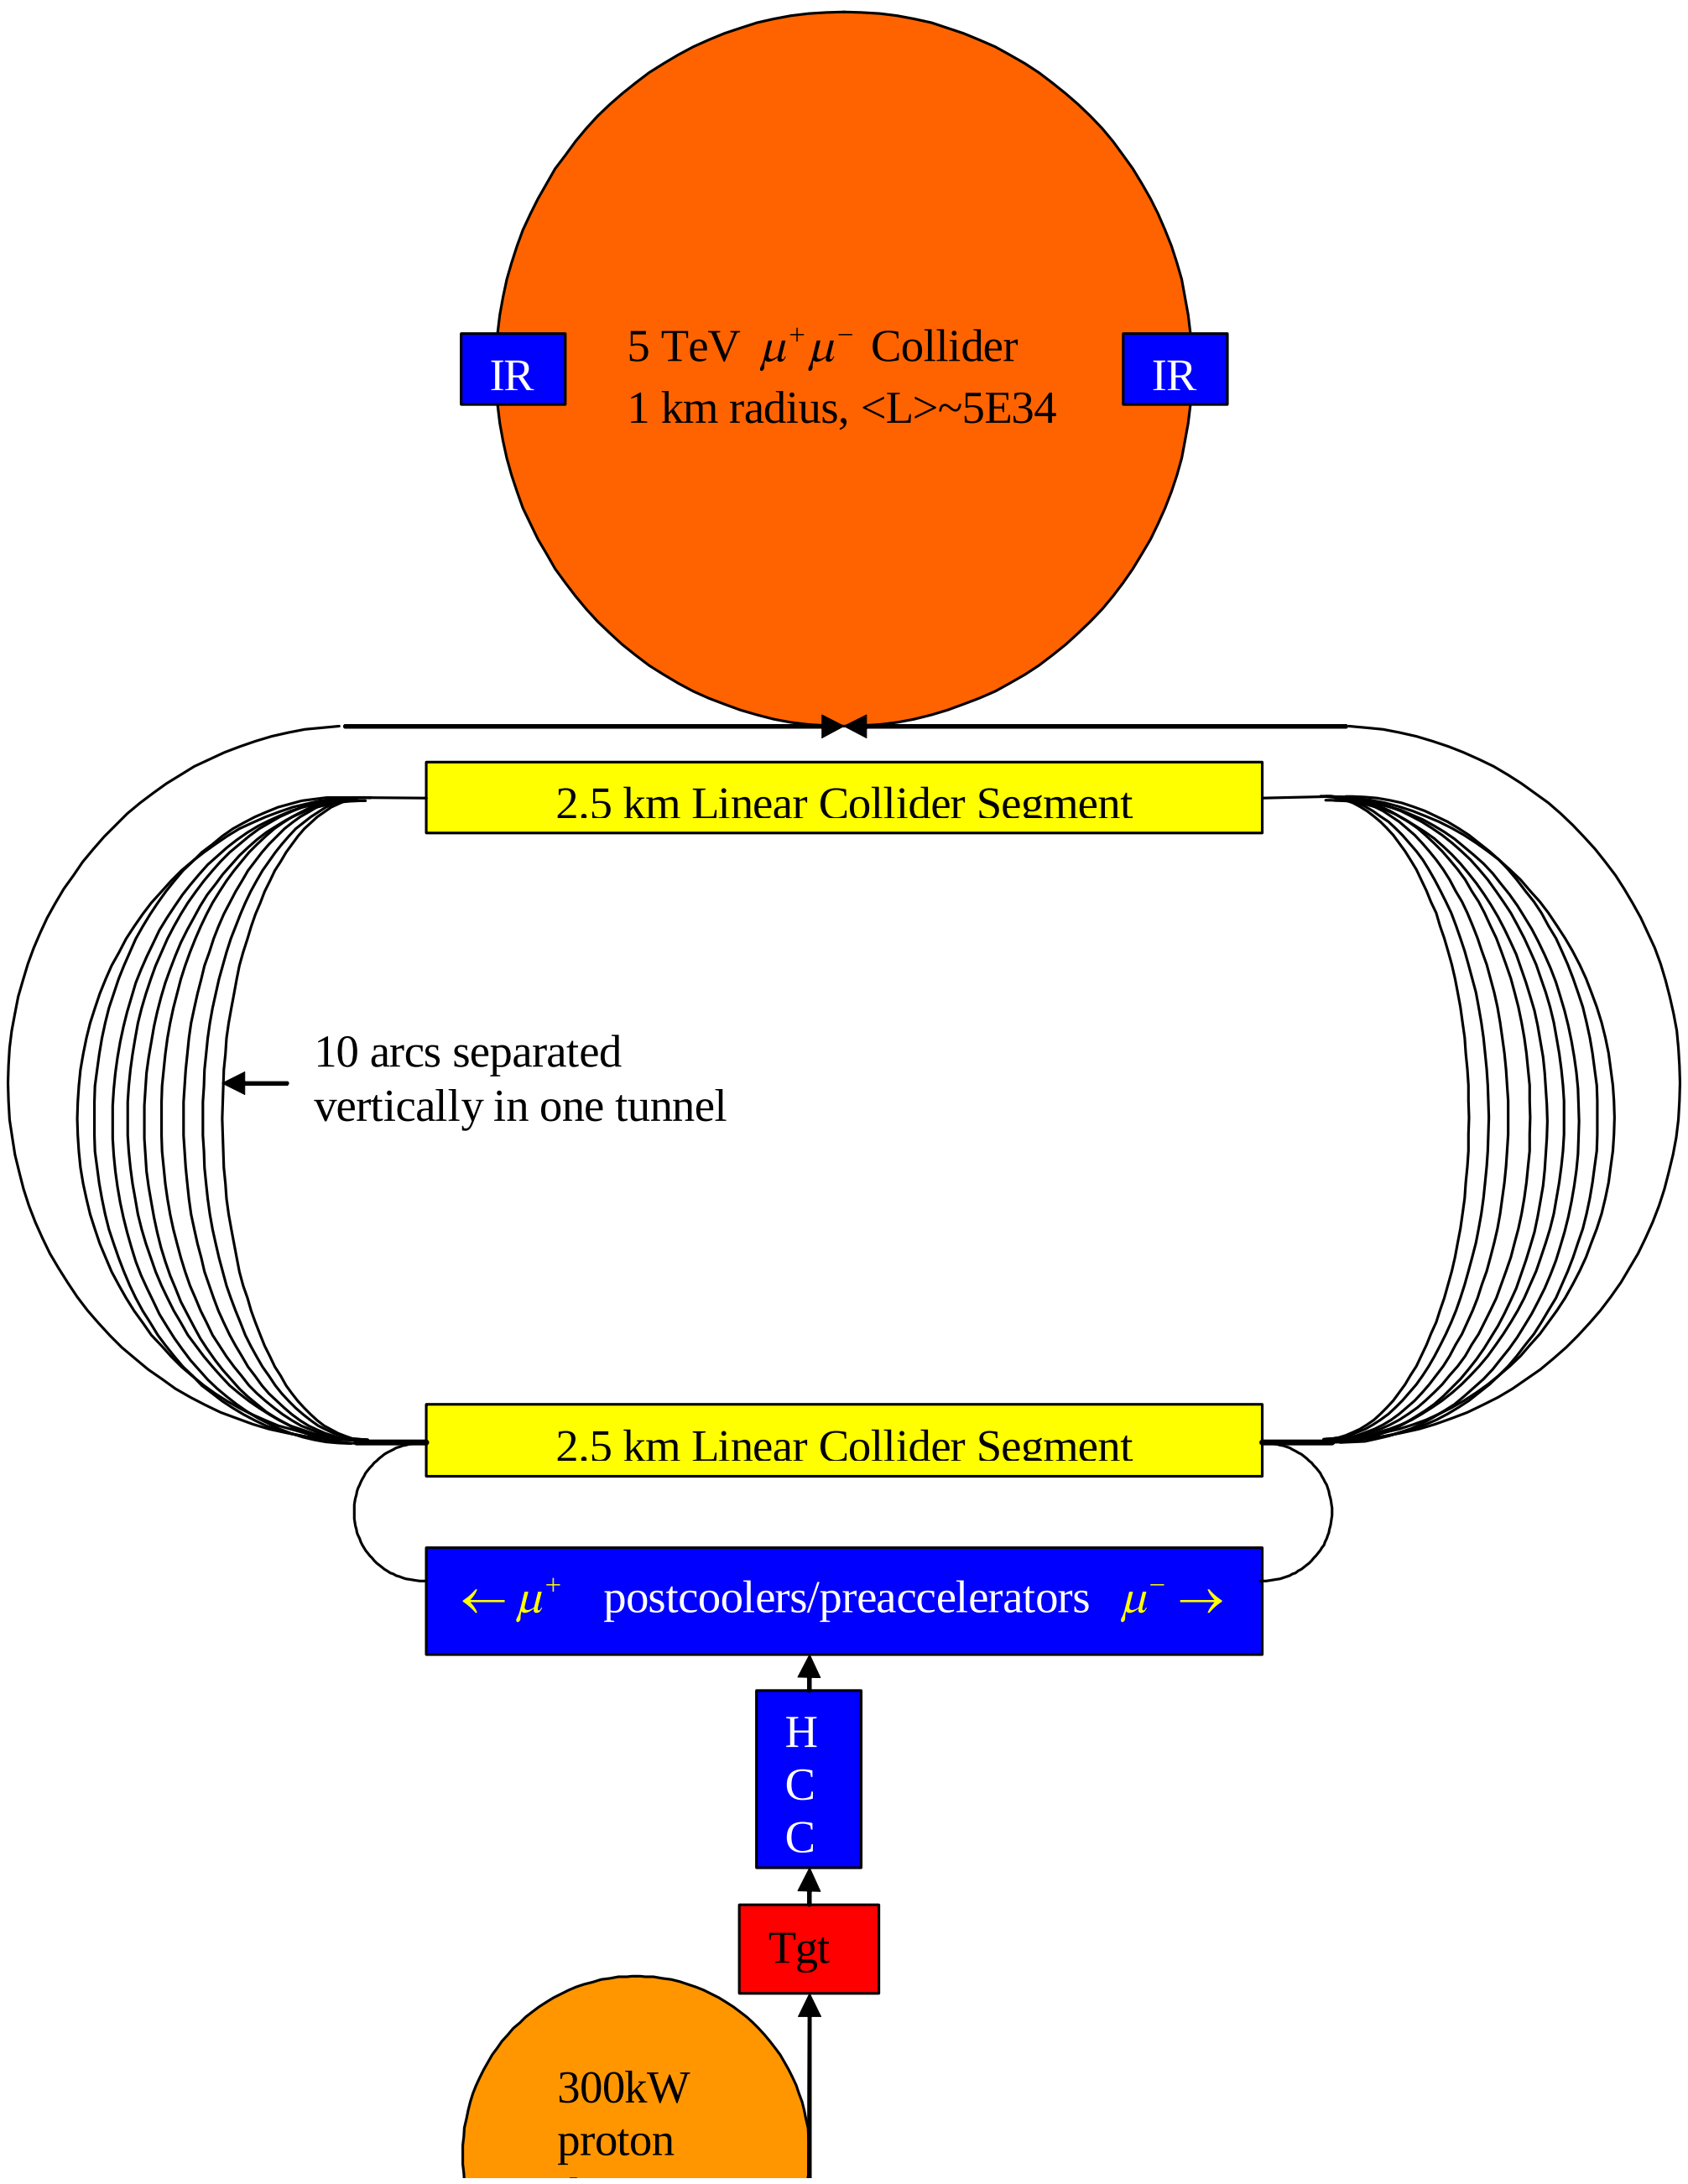

Muon Collider Emittances and Luminosities

	ε_N tr	ε_N long.
• After:		
– Precooling	20,000 μm	10,000 μm
– Basic HCC 6D	200 μm	100 μm
– Parametric-resonance IC	25 μm	100 μm
– Reverse Emittance Exchange	2 μm	2 cm

At 2.5 TeV on 2.5 TeV

$$L_{peak} = \frac{N_1 n \, \Delta\nu}{\beta^* r_\mu} f_0 \gamma = 10^{35} / cm^2 - s$$

$\gamma \approx 2.5\times10^4$ $\quad n = 10$

$f_0 = 50kHz$ $\quad N_1 = 10^{11}\mu^-$

$\Delta\nu = 0.06$ $\quad \beta^* = 0.5\,cm$

$\sigma_z = 3\,mm$ $\quad \Delta\gamma/\gamma = 3\times10^{-4}$

$\tau_\mu \approx 50\,ms \Rightarrow 2500\,turns/\tau_\mu$

20 Hz Operation:

$$\langle L \rangle \approx 4.3\times10^{34} / cm^2 - s$$

$$Power = (26\times10^9)(6.6\times10^{13})(1.6\times10^{-19}) = 0.3MW$$

$0.3\,\mu^\pm / p$

Neutrinos from an 8 GeV SC Linac

Muon cooling to reduce costs of a neutrino factory based on a storage ring.
Cooling must be 6D to fit in 1.3 GHz SC RF, where the last 6.8 GeV of 8 GeV are $\beta=1$.
New concept: Run Linac CW, increase rep rate from 10 to 100 or more, for more νs.

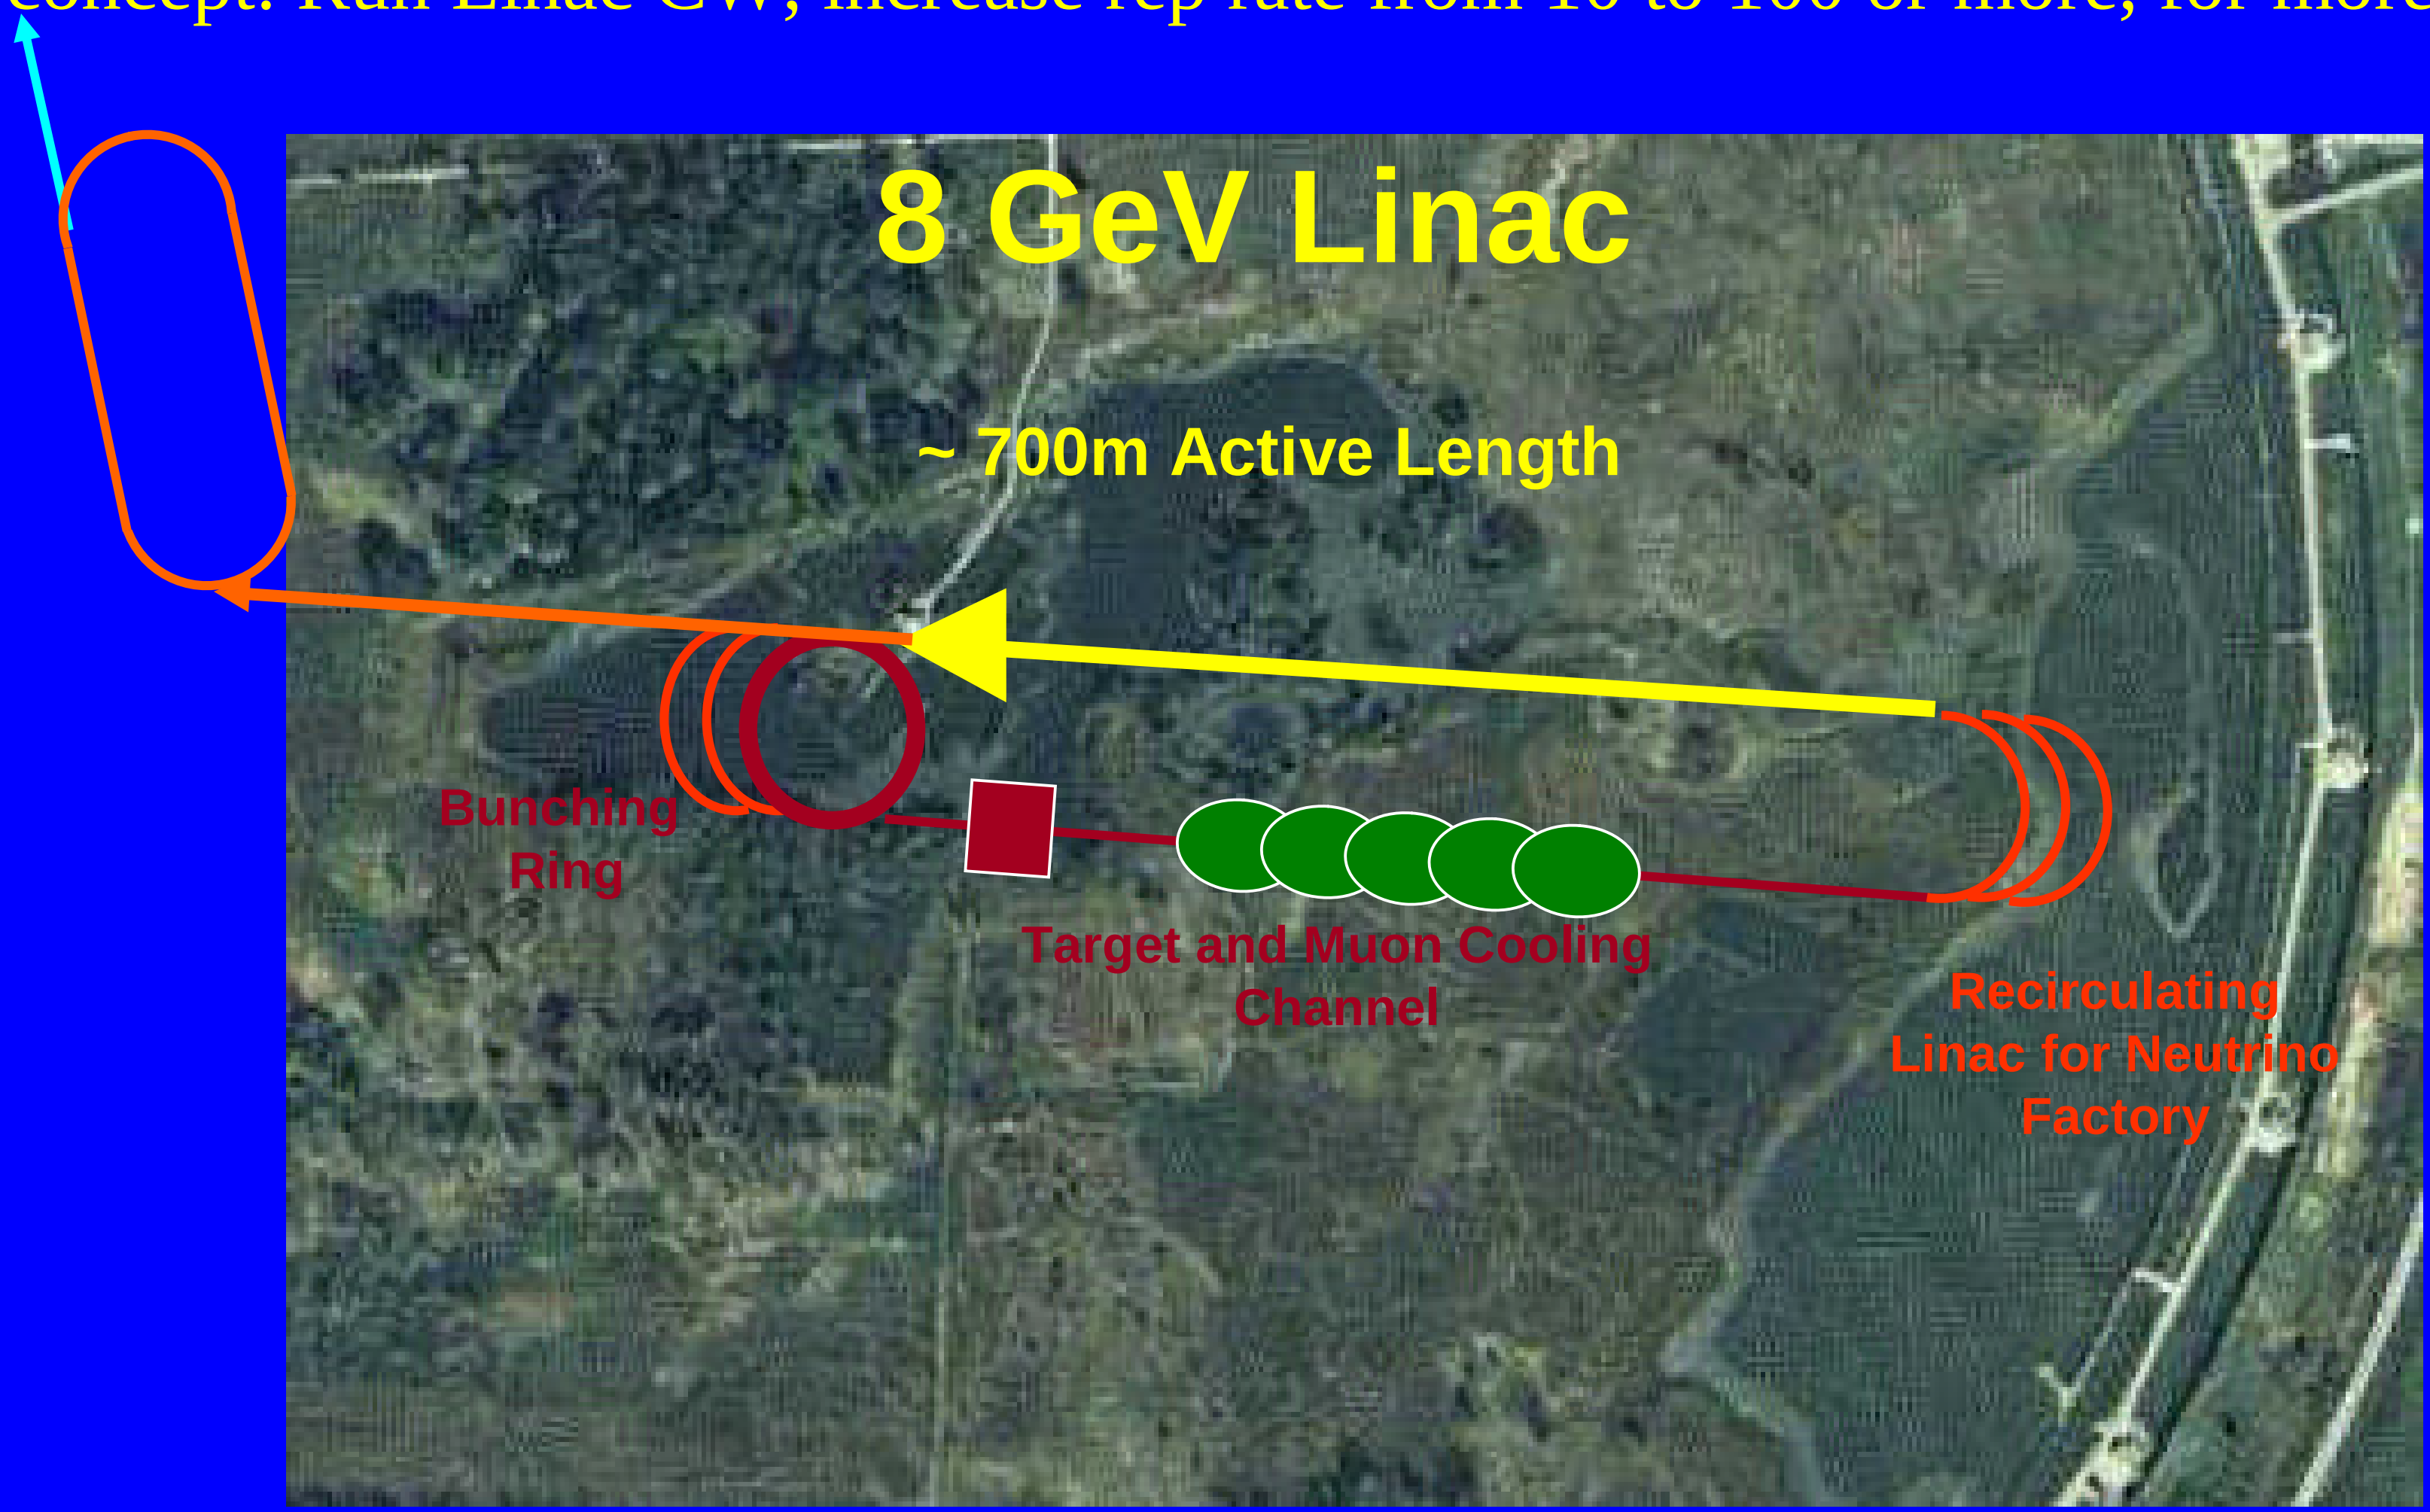

Ionization Cooling (IC) Principle

- Schematic of angular divergence cooling

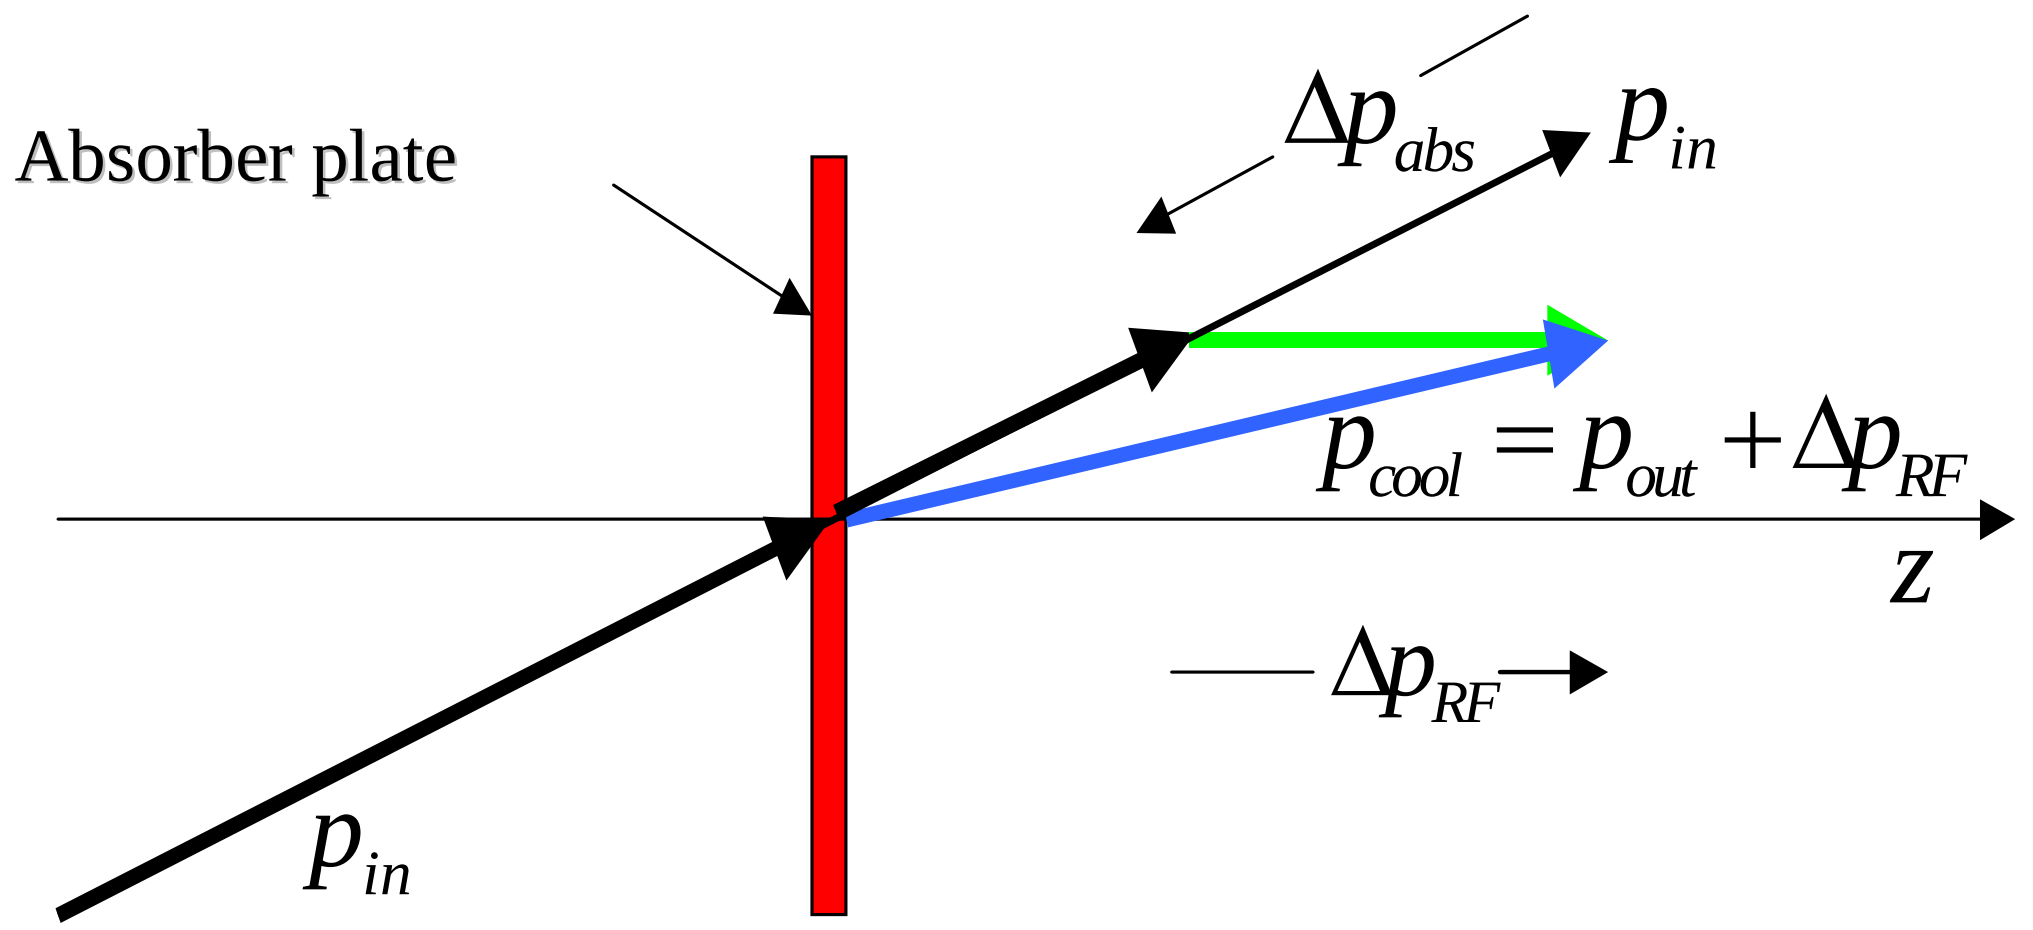

Our cooling ideas use this concept. It is the only method fast enough for muons!

Eight New Ideas for Bright Beams for High Luminosity Muon Colliders

supported by SBIR/STTR grants

H_2-Pressurized RF Cavities
Continuous Absorber for Emittance Exchange
Helical Cooling Channel
Z-dependent HCC
MANX 6d Cooling Demo
Parametric-resonance Ionization Cooling
Reverse Emittance Exchange
RF capture, phase rotation, cooling in HP RF Cavities

Idea #1: RF Cavities with Pressurized H_2

- Dense GH_2 suppresses high-voltage breakdown
  - Small MFP inhibits avalanches (**Paschen's Law**)
- Gas acts as an energy absorber
  - Needed for ionization cooling
- Only works for muons
  - No strong interaction scattering like protons
  - More massive than electrons so no showers

R. P. Johnson et al. invited talk at LINAC2004, http://www.muonsinc.com/TU203.pdf
Pierrick M. Hanlet et al., Studies of RF Breakdown of Metals in Dense Gases, PAC05
Kevin Paul et al., Simultaneous bunching and precooling muon beams with gas-filled RF cavities, PAC05
Mohammad Alsharo'a et al., Beryllium RF Windows for Gaseous Cavities for Muon Acceleration, PAC05
Also see WG3 talks by D. Cline, S. Kahn, and A. Klier on ring coolers for other use of ideas 1 and 2

Hardware Development

- To develop RF cavities, pressurized with dense hydrogen, suitable for use in muon cooling.
- Measurements of RF parameters (e.g. breakdown voltage, dark current, quality factor) for different temperatures and pressures in magnetic and radiation fields to optimize the design of prototypes for ionization cooling demonstration experiments
- *See MuCool Note 285 for paper*

Mark II TC; 2000PSI @ 77K


4/9/2003

MuCool Test Area (MTA)

Lab G Results, Molybdenum Electrode

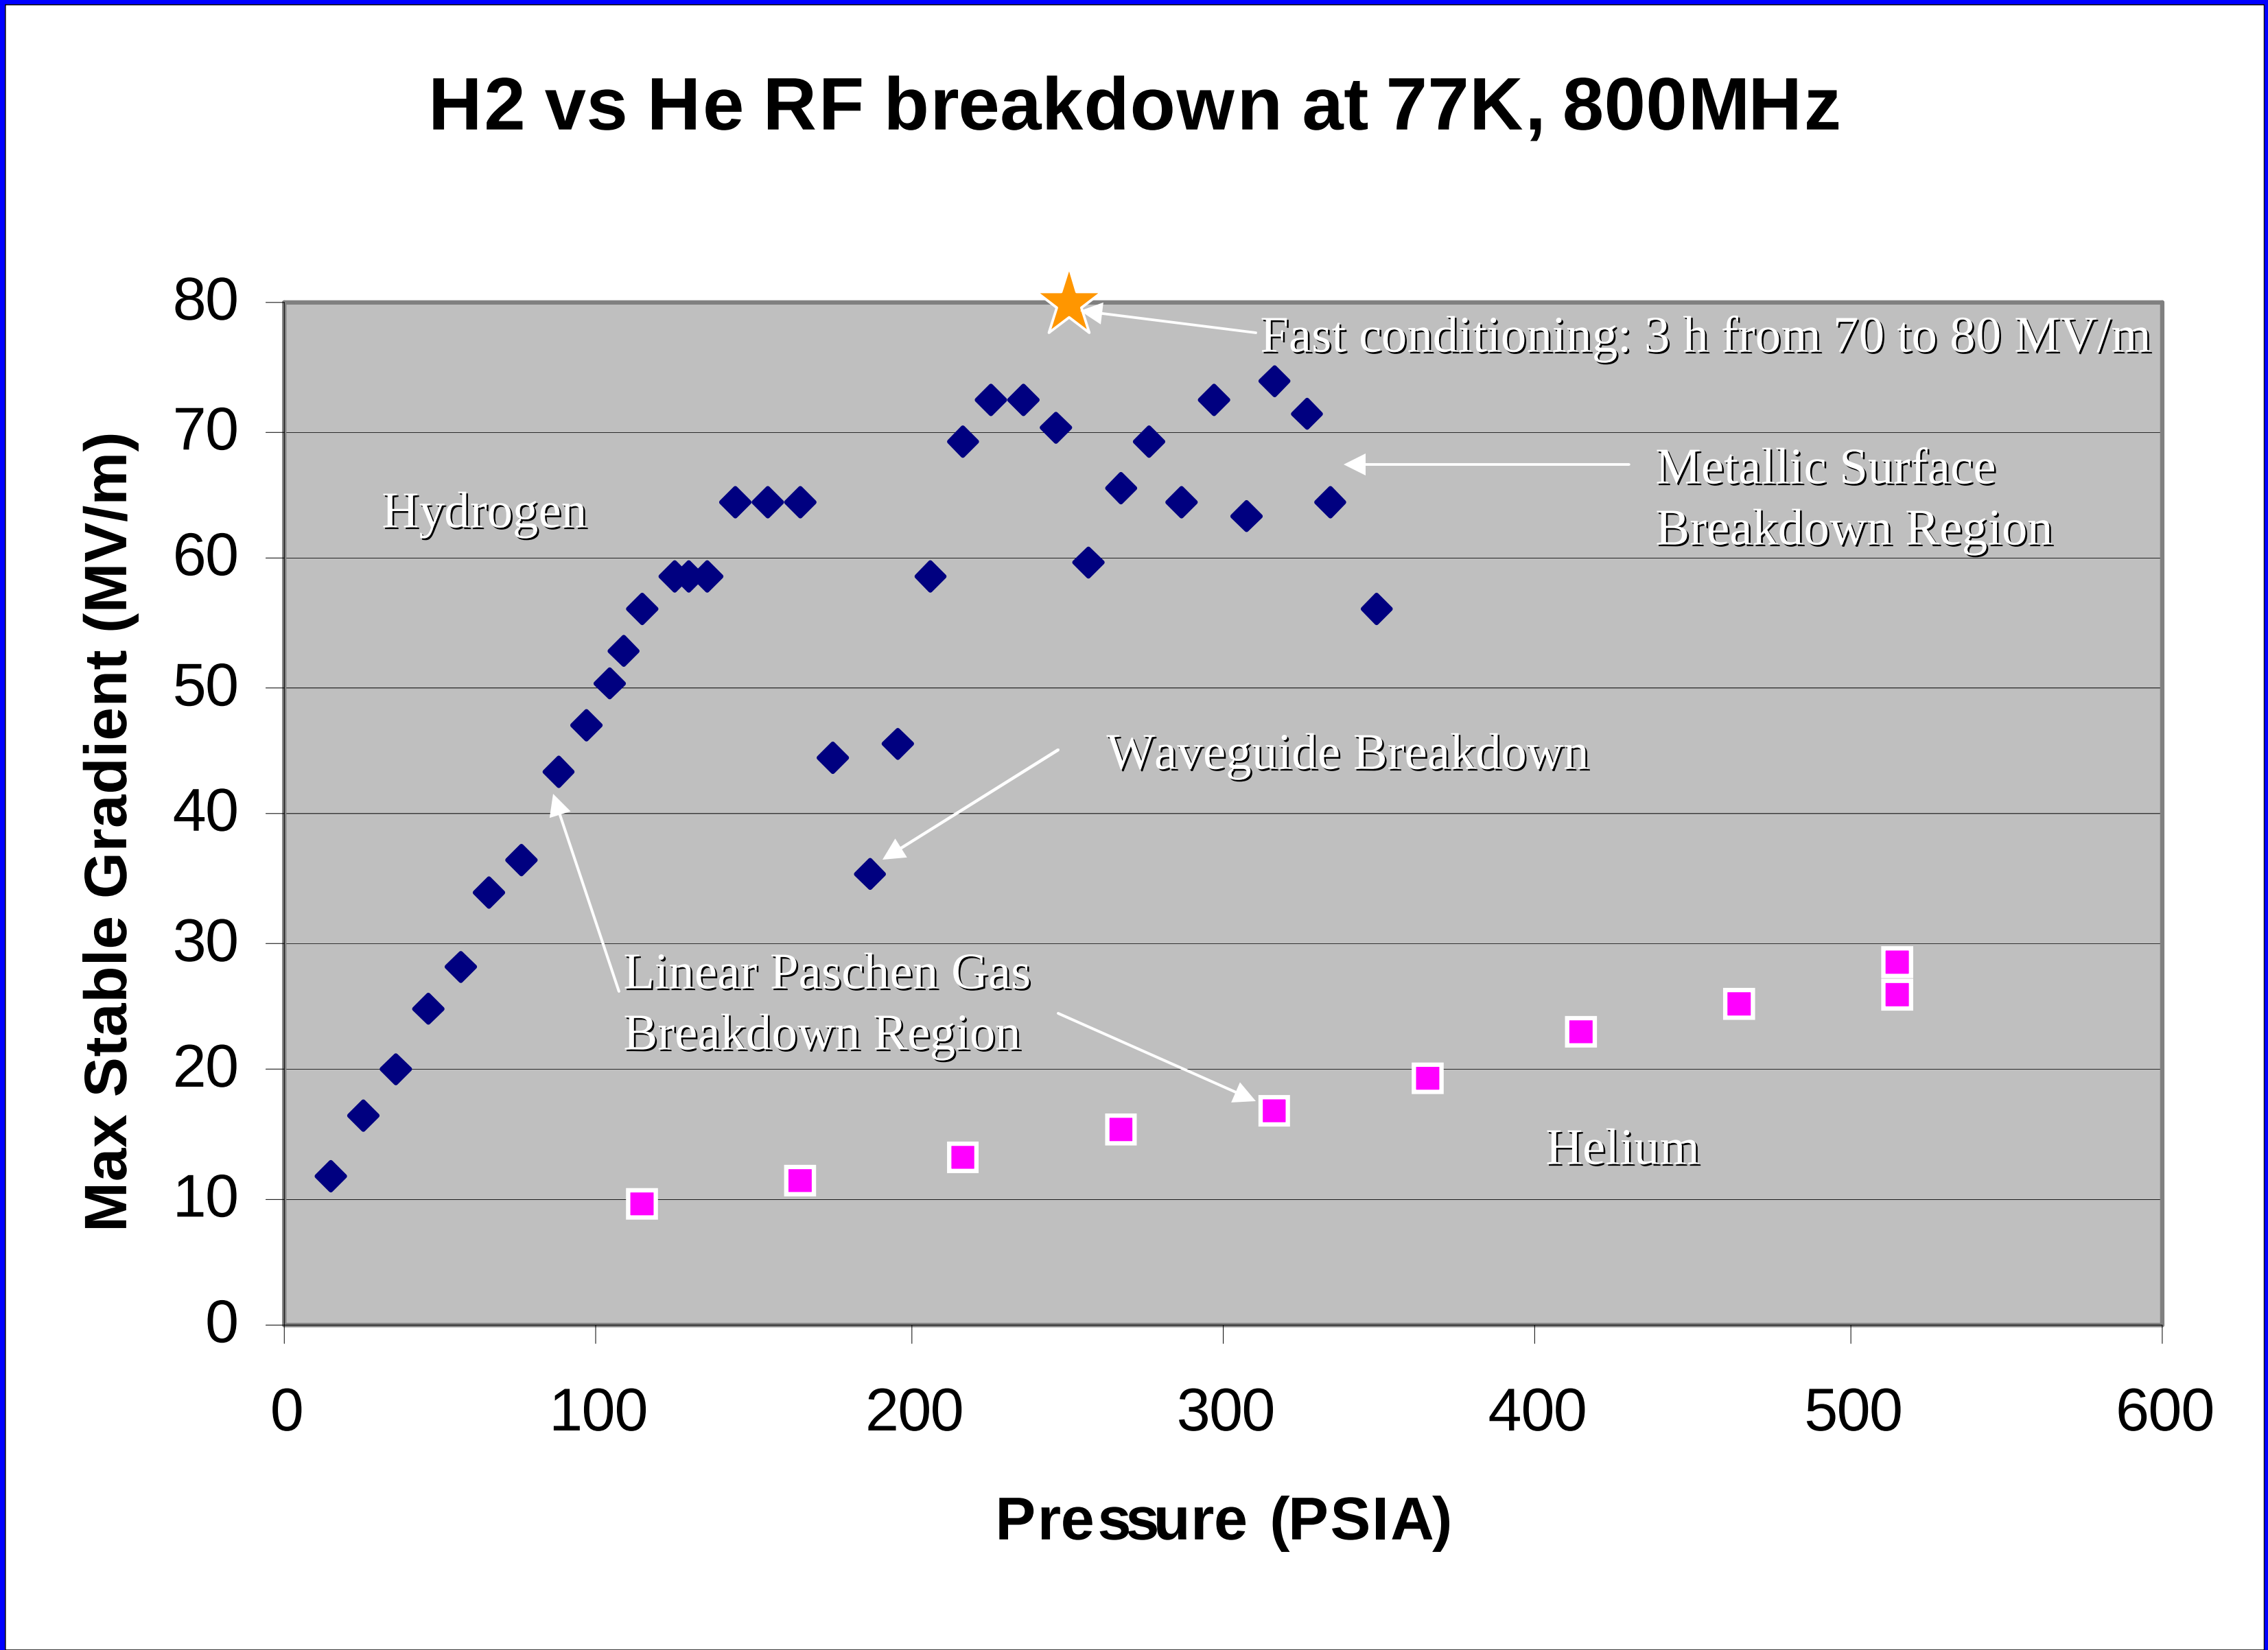

Idea #2: Continuous Energy Absorber for Emittance Exchange and 6d Cooling

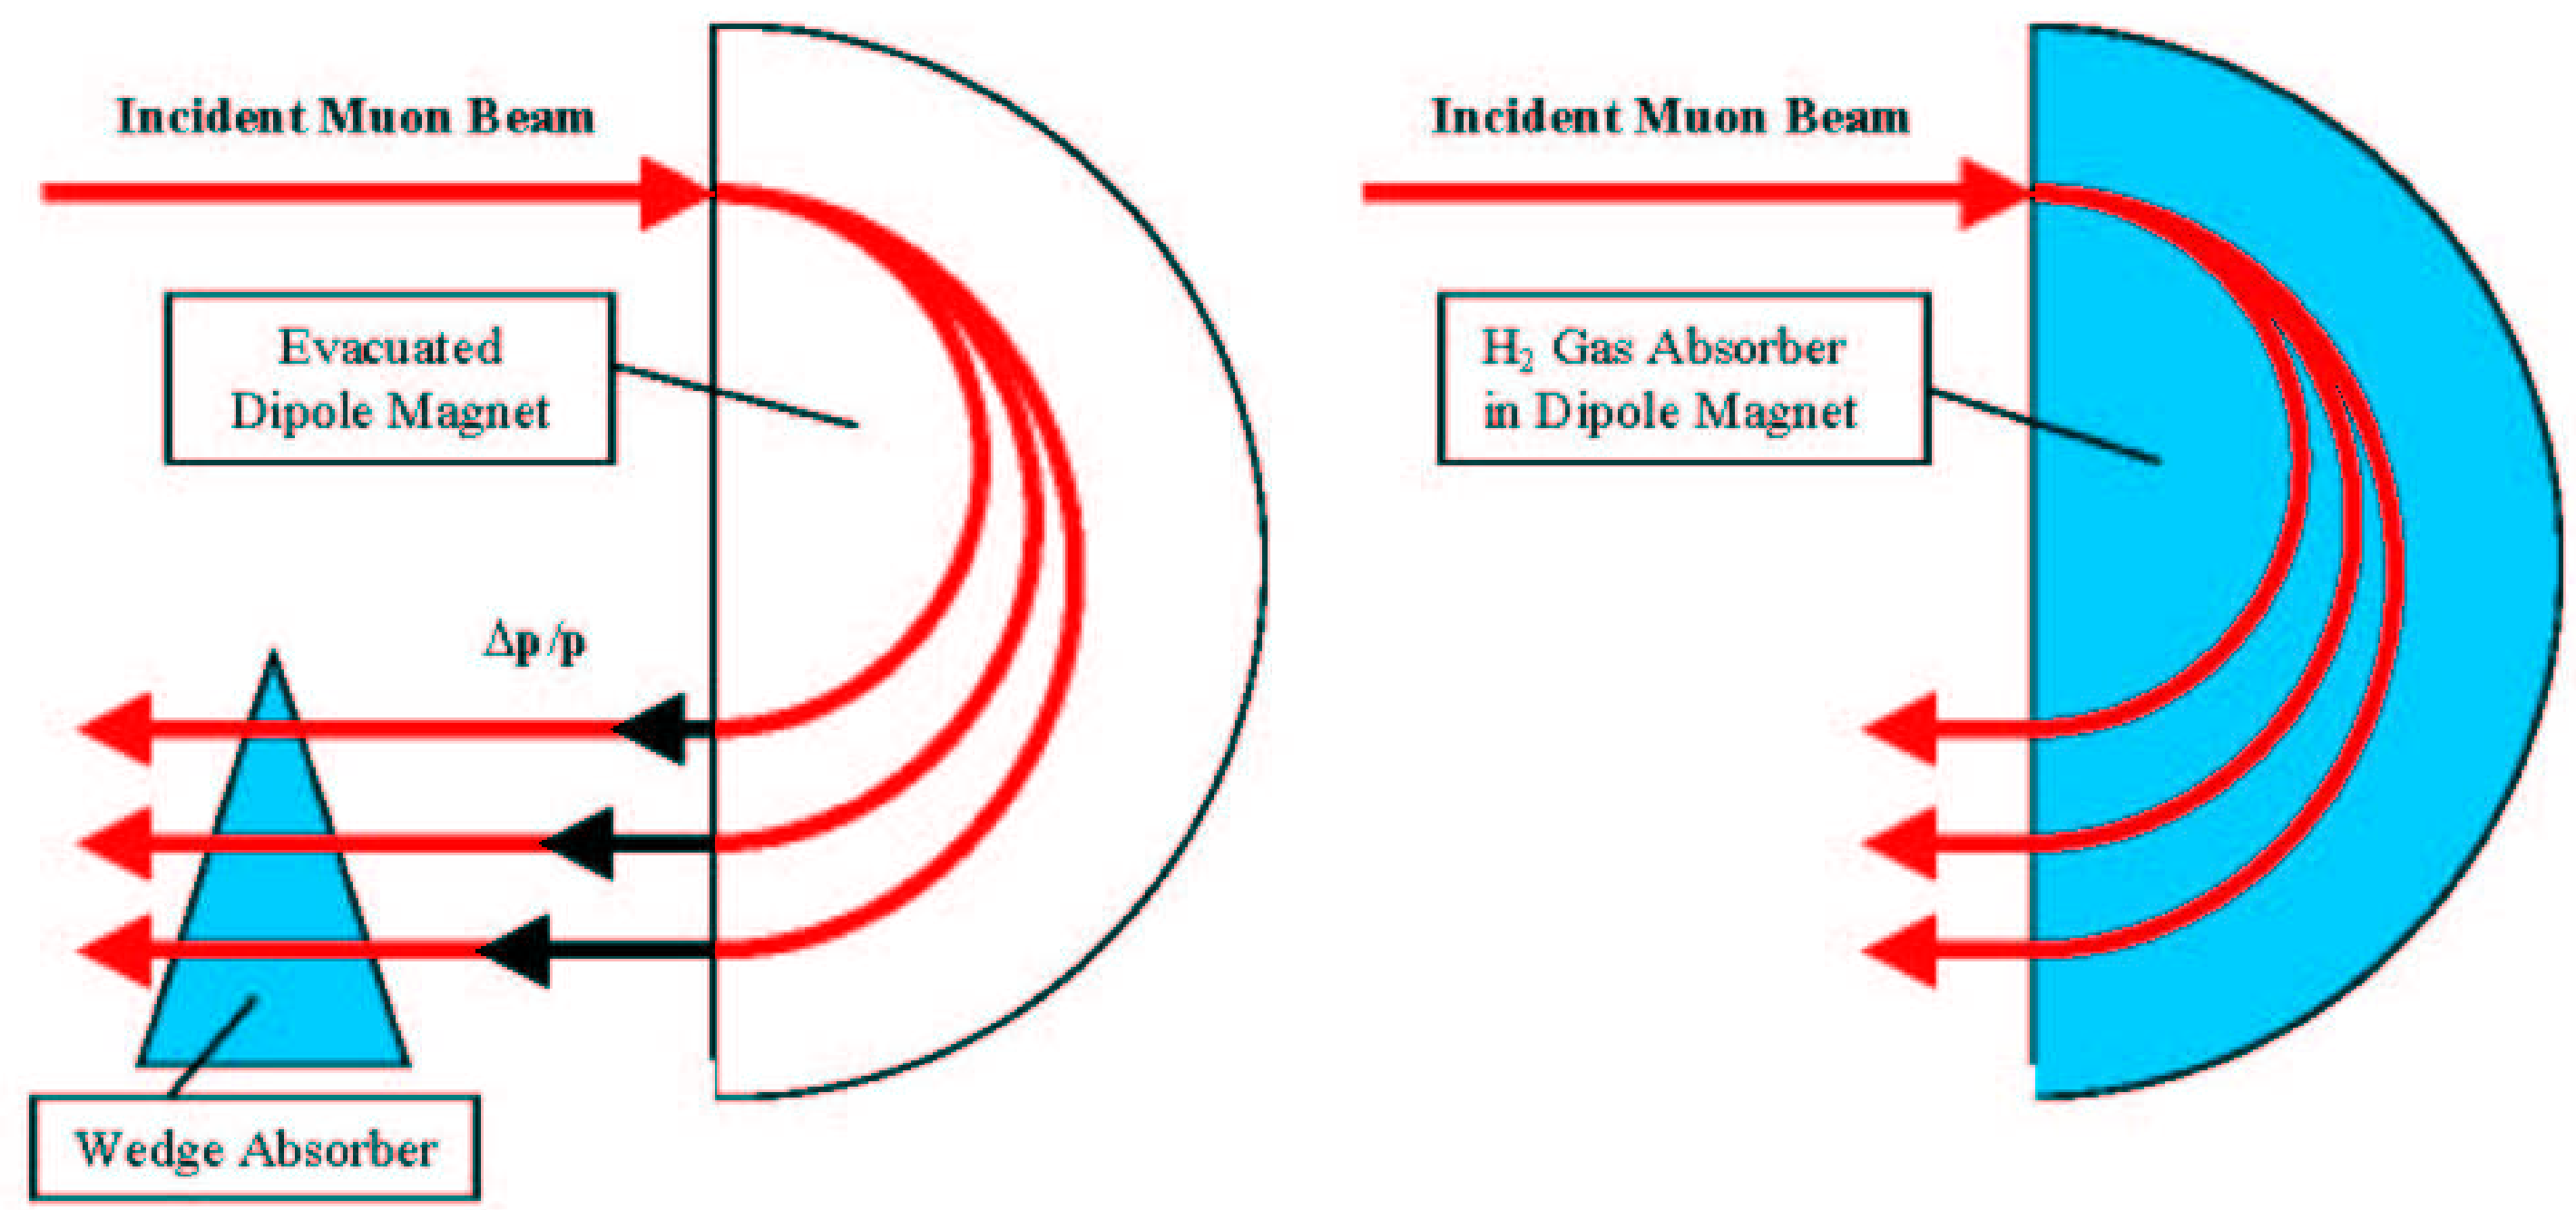

Figure 1. Use of a Wedge Absorber for Emittance Exchange

Figure 2. Use of Continuous Gaseous Absorber for Emittance Exchange

Ionization Cooling is only transverse. To get 6D cooling, emittance exchange between transverse and longitudinal coordinates is needed. In figure 2, positive dispersion gives higher energy muons larger energy loss due to their longer path length in a low-Z absorber.

Idea #3: six dimensional Cooling with HCC and continuous absorber

- Helical cooling channel (HCC)
  - Solenoidal plus transverse helical dipole and quadrupole fields
  - Helical dipoles known from Siberian Snakes
  - z-independent Hamiltonian

Derbenev & Johnson, Theory of HCC, April/05 PRST-AB

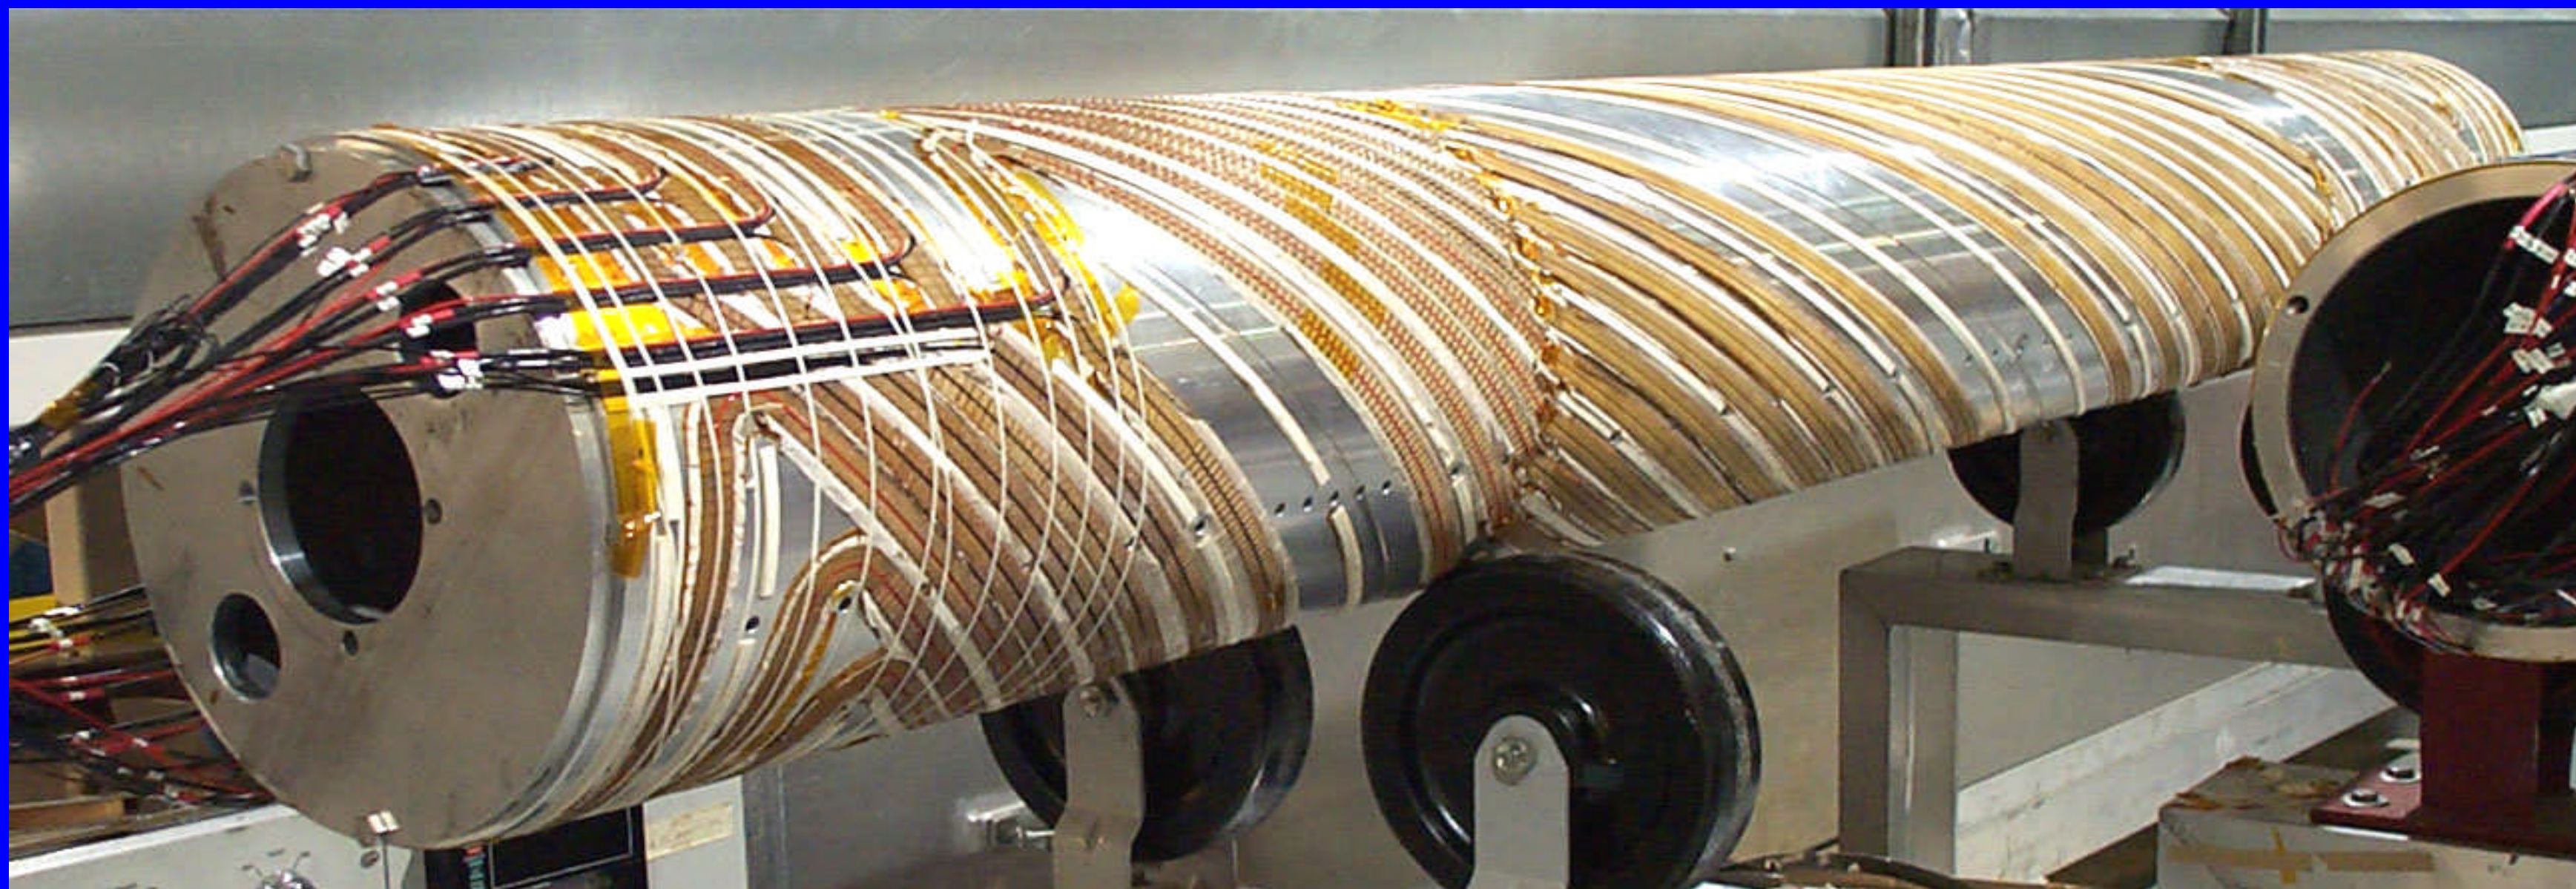

Photograph of a helical coil for the AGS Snake

11” diameter helical dipole: we want ~2.5 x larger bore

The centrifugal and centripetal forces that maintain a helical orbit in the Helical Cooling Channel are:

$$F_{h-dipole} = p_z \times B_\perp ; \quad b \equiv B_\perp$$

$$F_{solenoid} = -p_\perp \times B_z ; \quad B \equiv B_z$$

$b = .7T,\ B = 3.5T$

$p = 100 MeV/c$

$p_\perp / p_z = 1.$

$r_{B+b} = 15cm$

$\lambda = 2\pi / k = 1m$

$r_{coil} = 30cm$

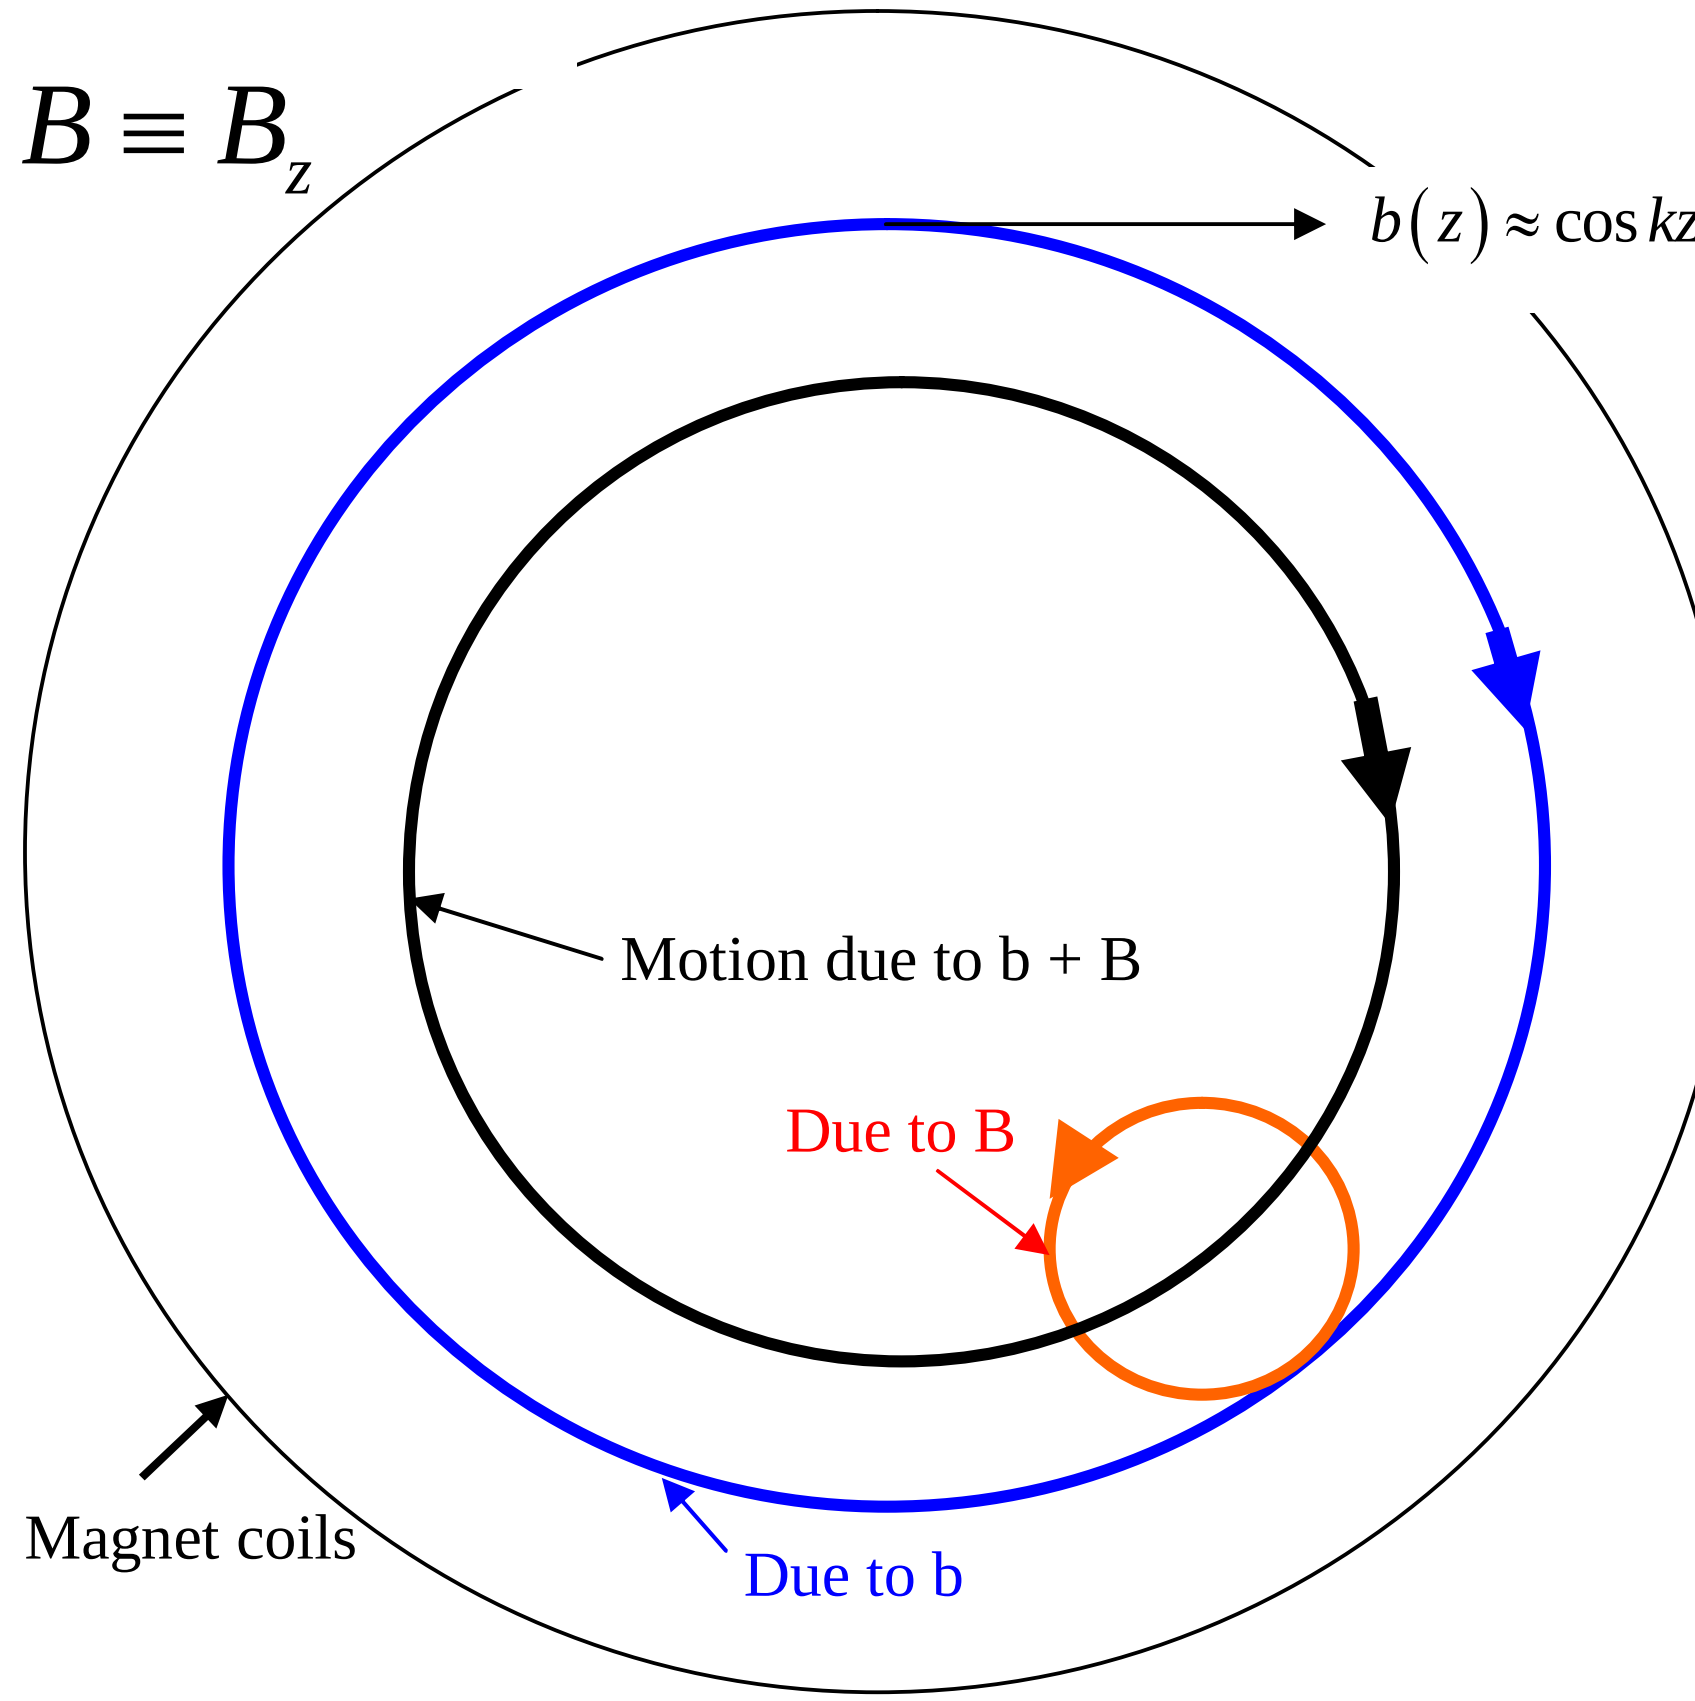

Helical Cooling Channel. Derbenev invention of combination of Solenoidal and helical dipole fields for muon cooling with emittance exchange and large acceptance. In the April PRST-AB, the magnitudes of B and b are constant, only the direction of b changes with z. This leads to a z or time-independent Hamiltonian, which has wonderful properties, well-suited to a continuous absorber. (Note that the helical dipole produces a z component that bucks the Solenoidal field)

G4BL 10 m helical cooling channel

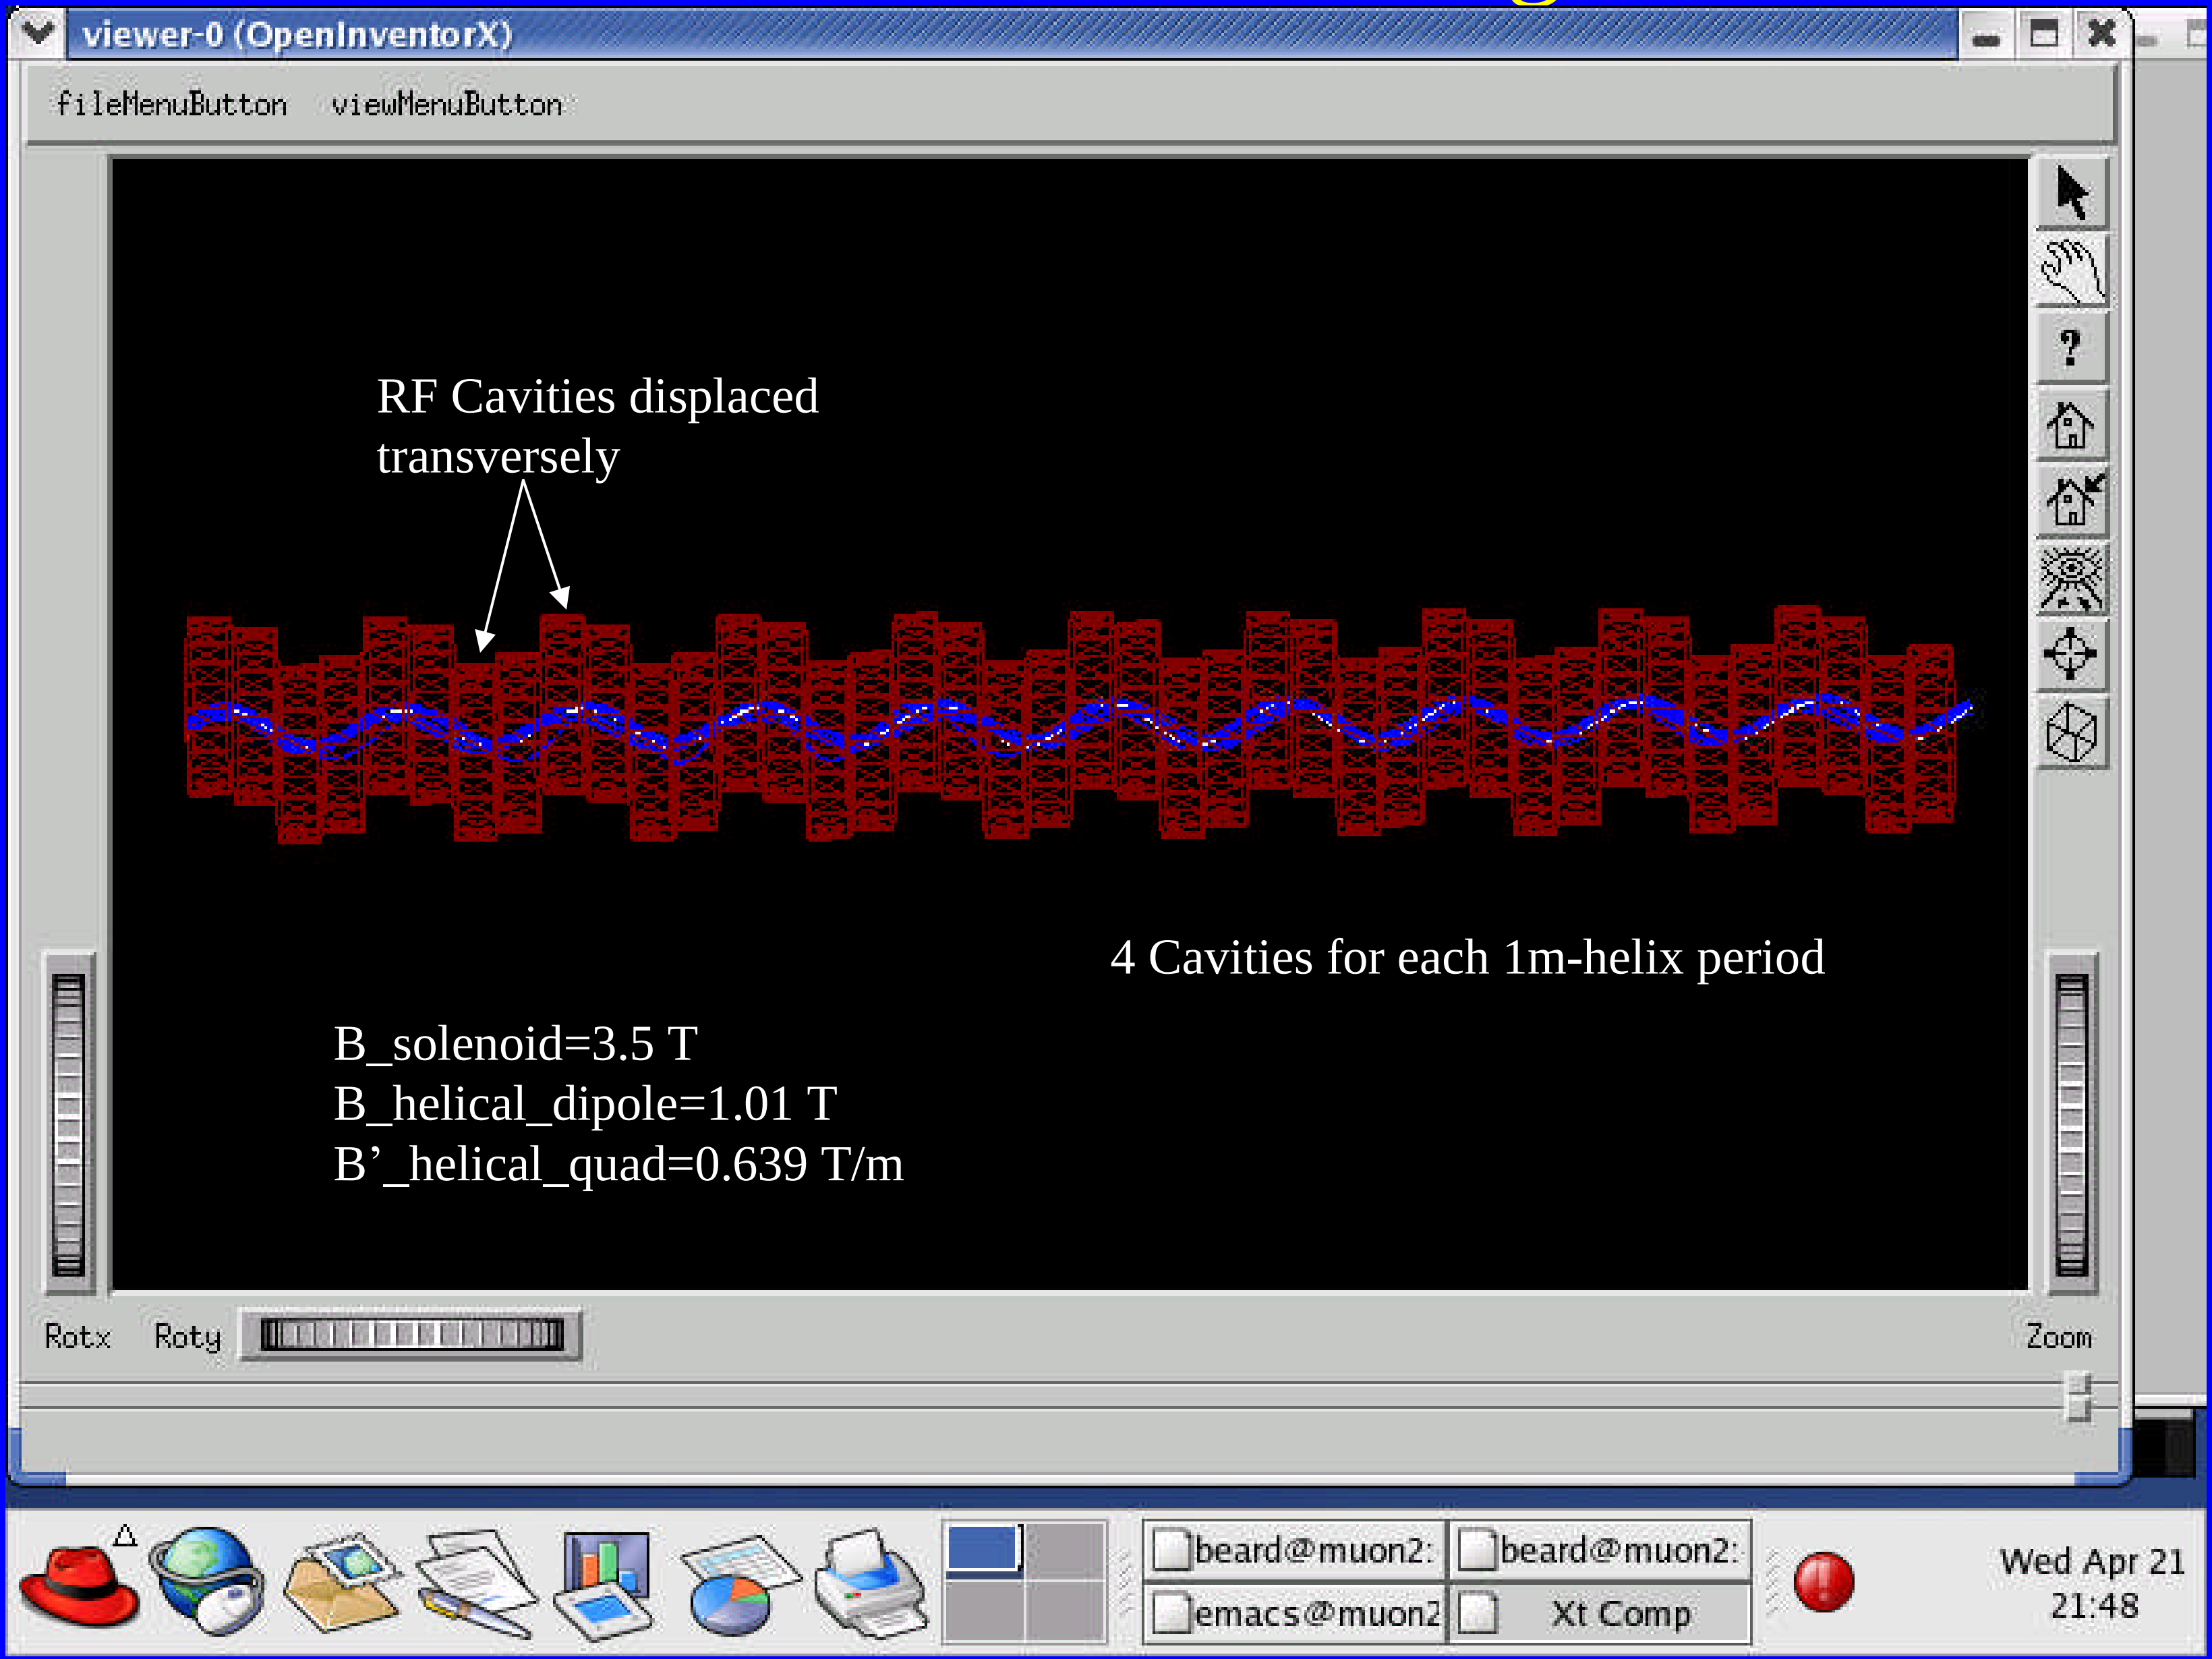

G4BL End view of 200MeV HCC

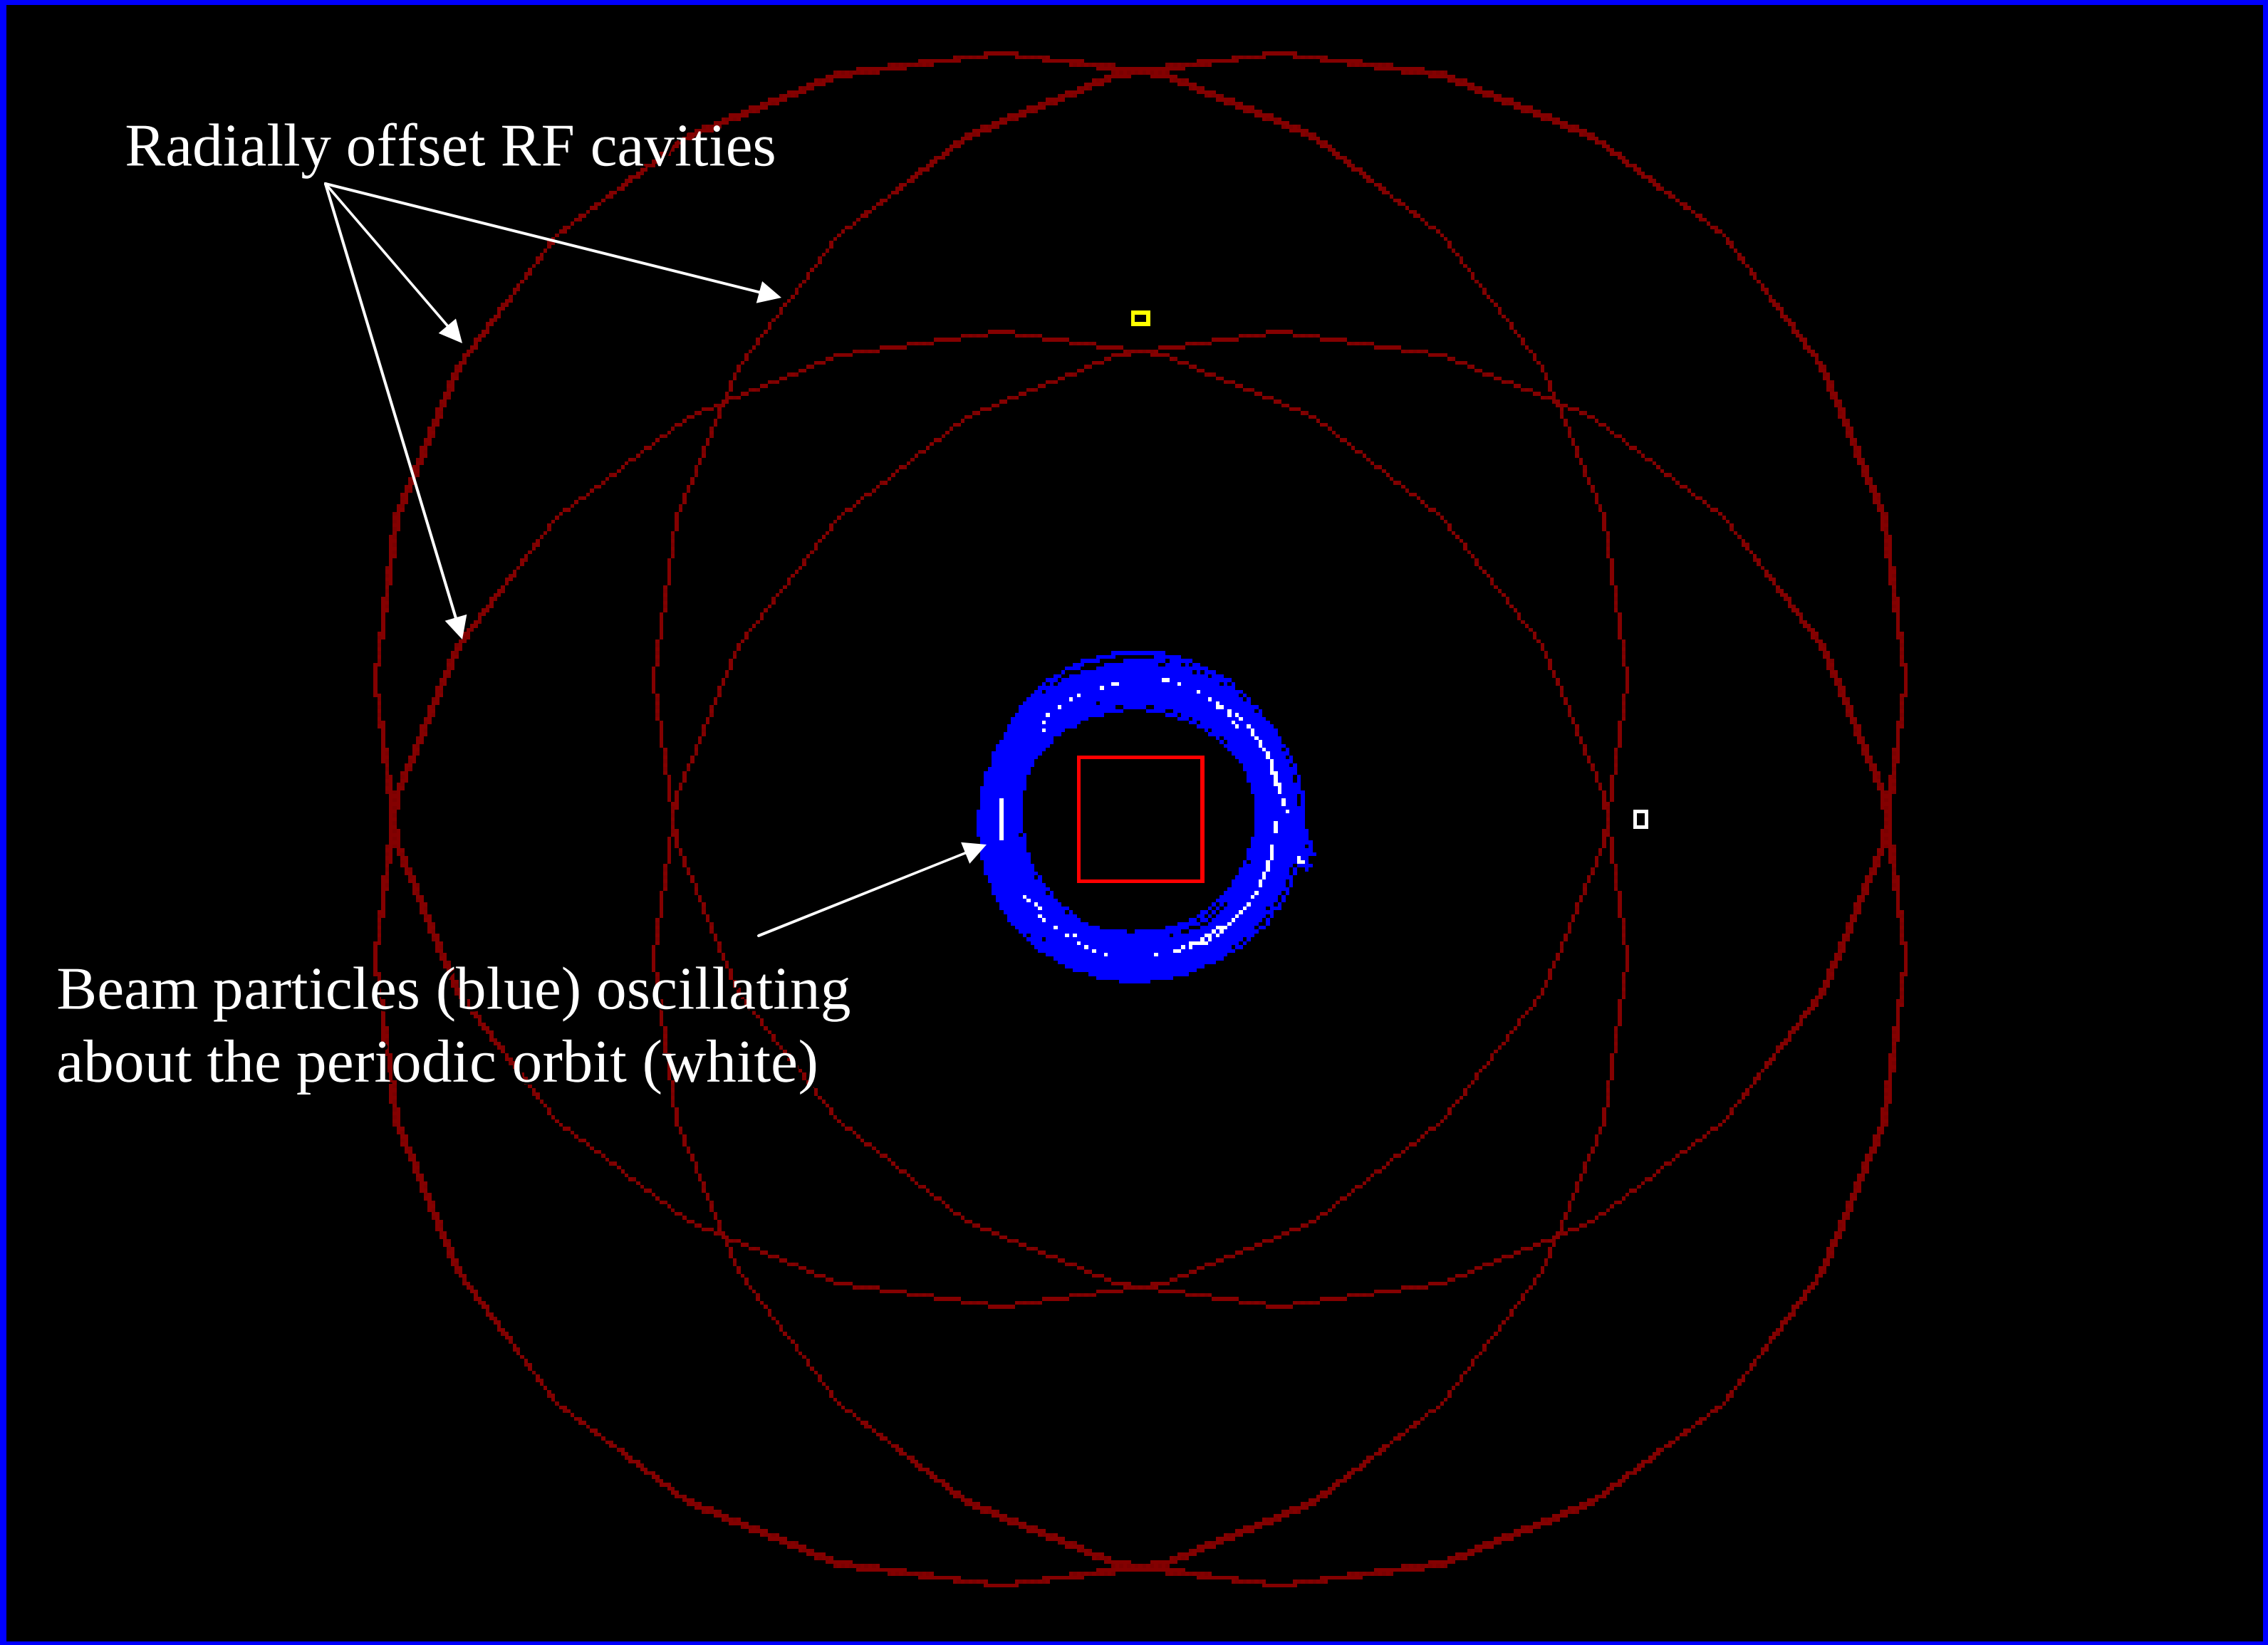

HCC simulations w/ GEANT4 (red) and ICOOL (blue)

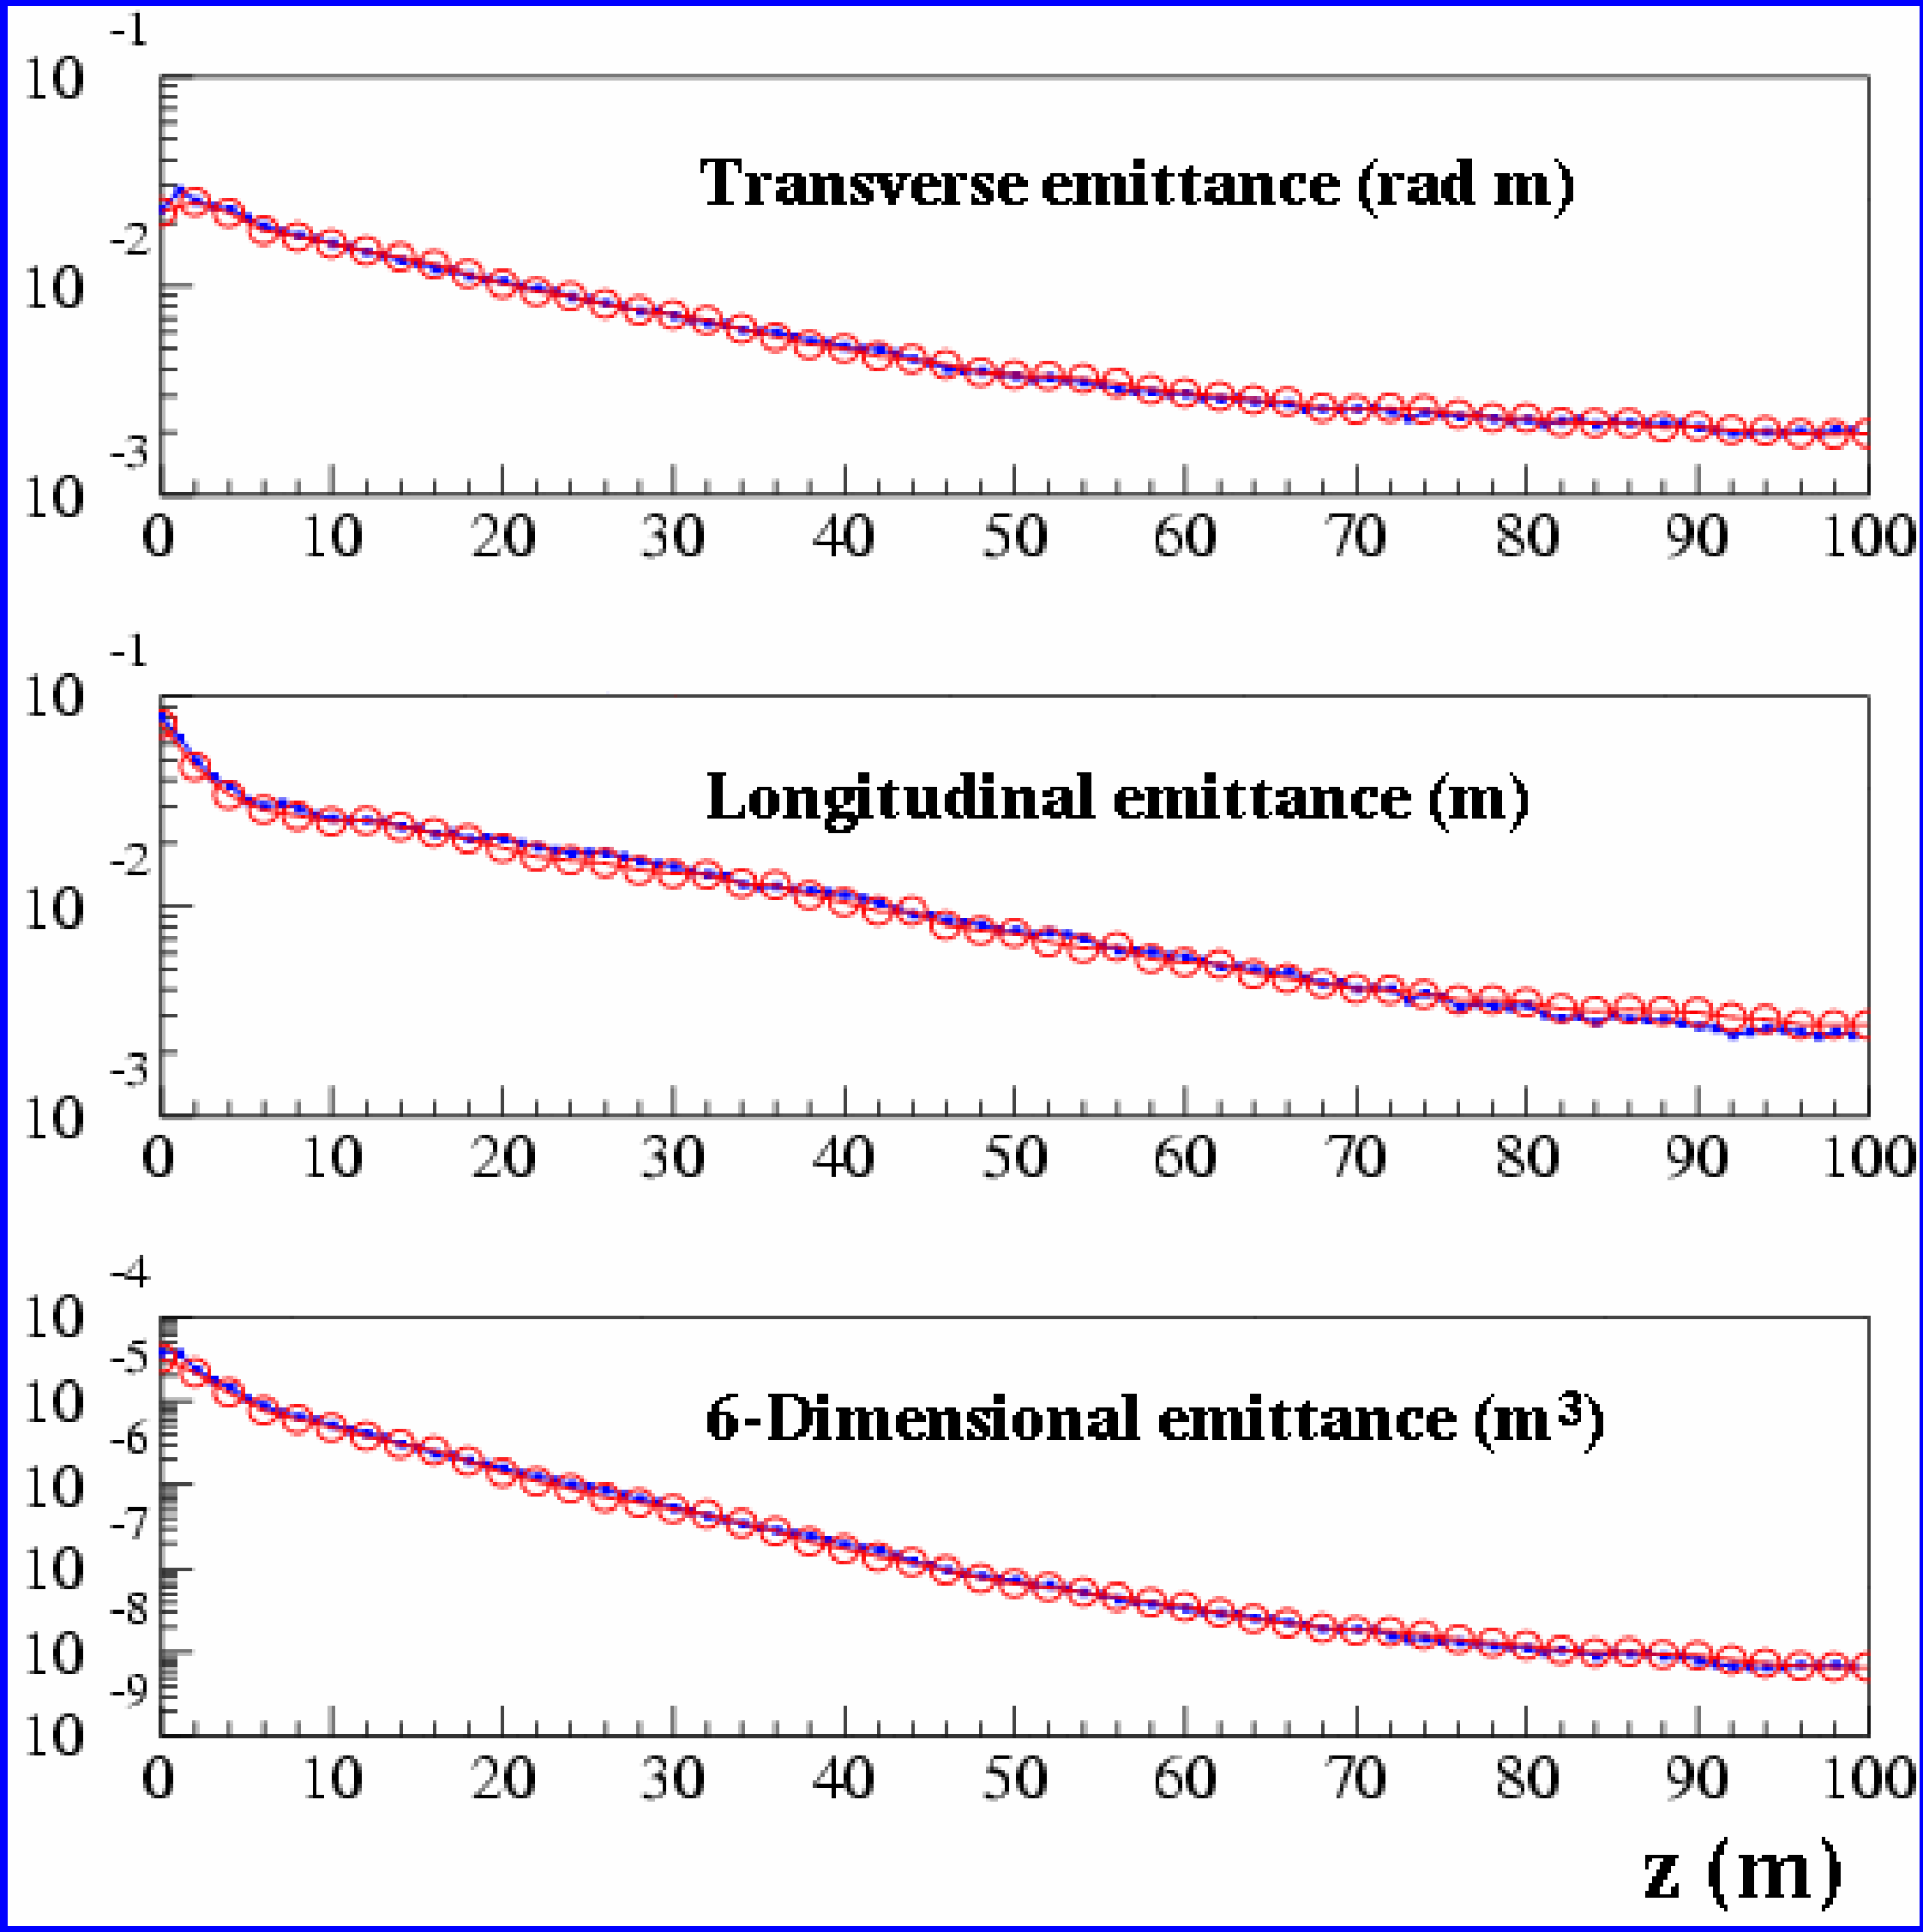

6D Cooling factor ~5,000

Katsuya Yonehara, et al., Simulations of a Gas-Filled Helical Cooling Channel, PAC05

First Results with Series of HCCs

- Start from a large *a* channel
  - Big acceptance
- Increase field strength along with z
  - Small equilibrium emittance
- Increase frequency along with z
  - Small equilibrium emittance
- Decrease *a* along with z
- Constant κ
  - Matching

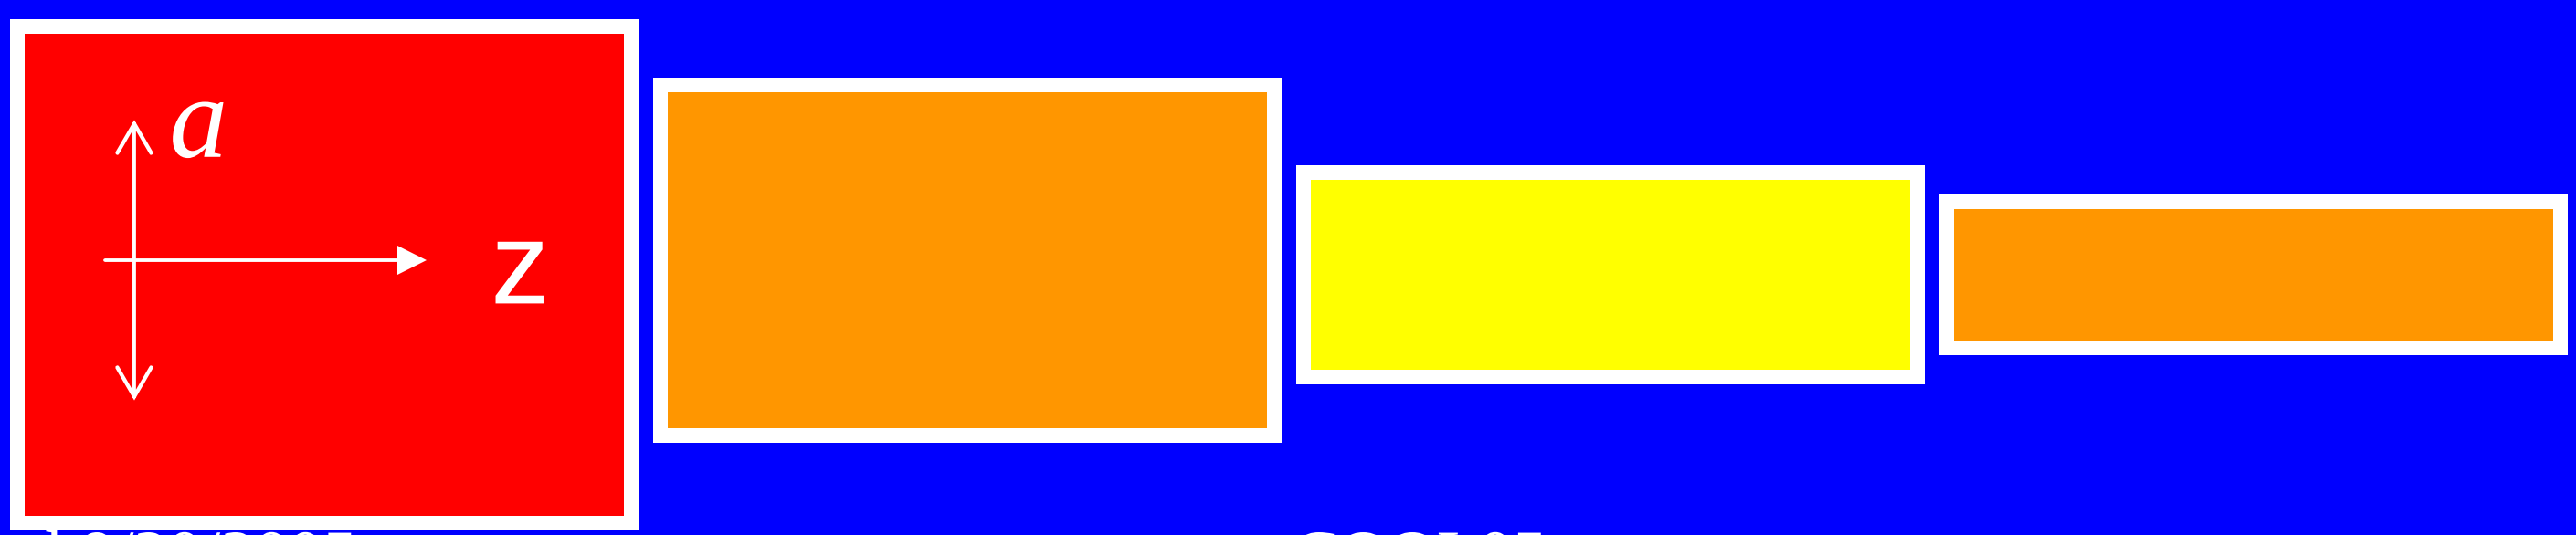

Reference orbit in series of HCCs

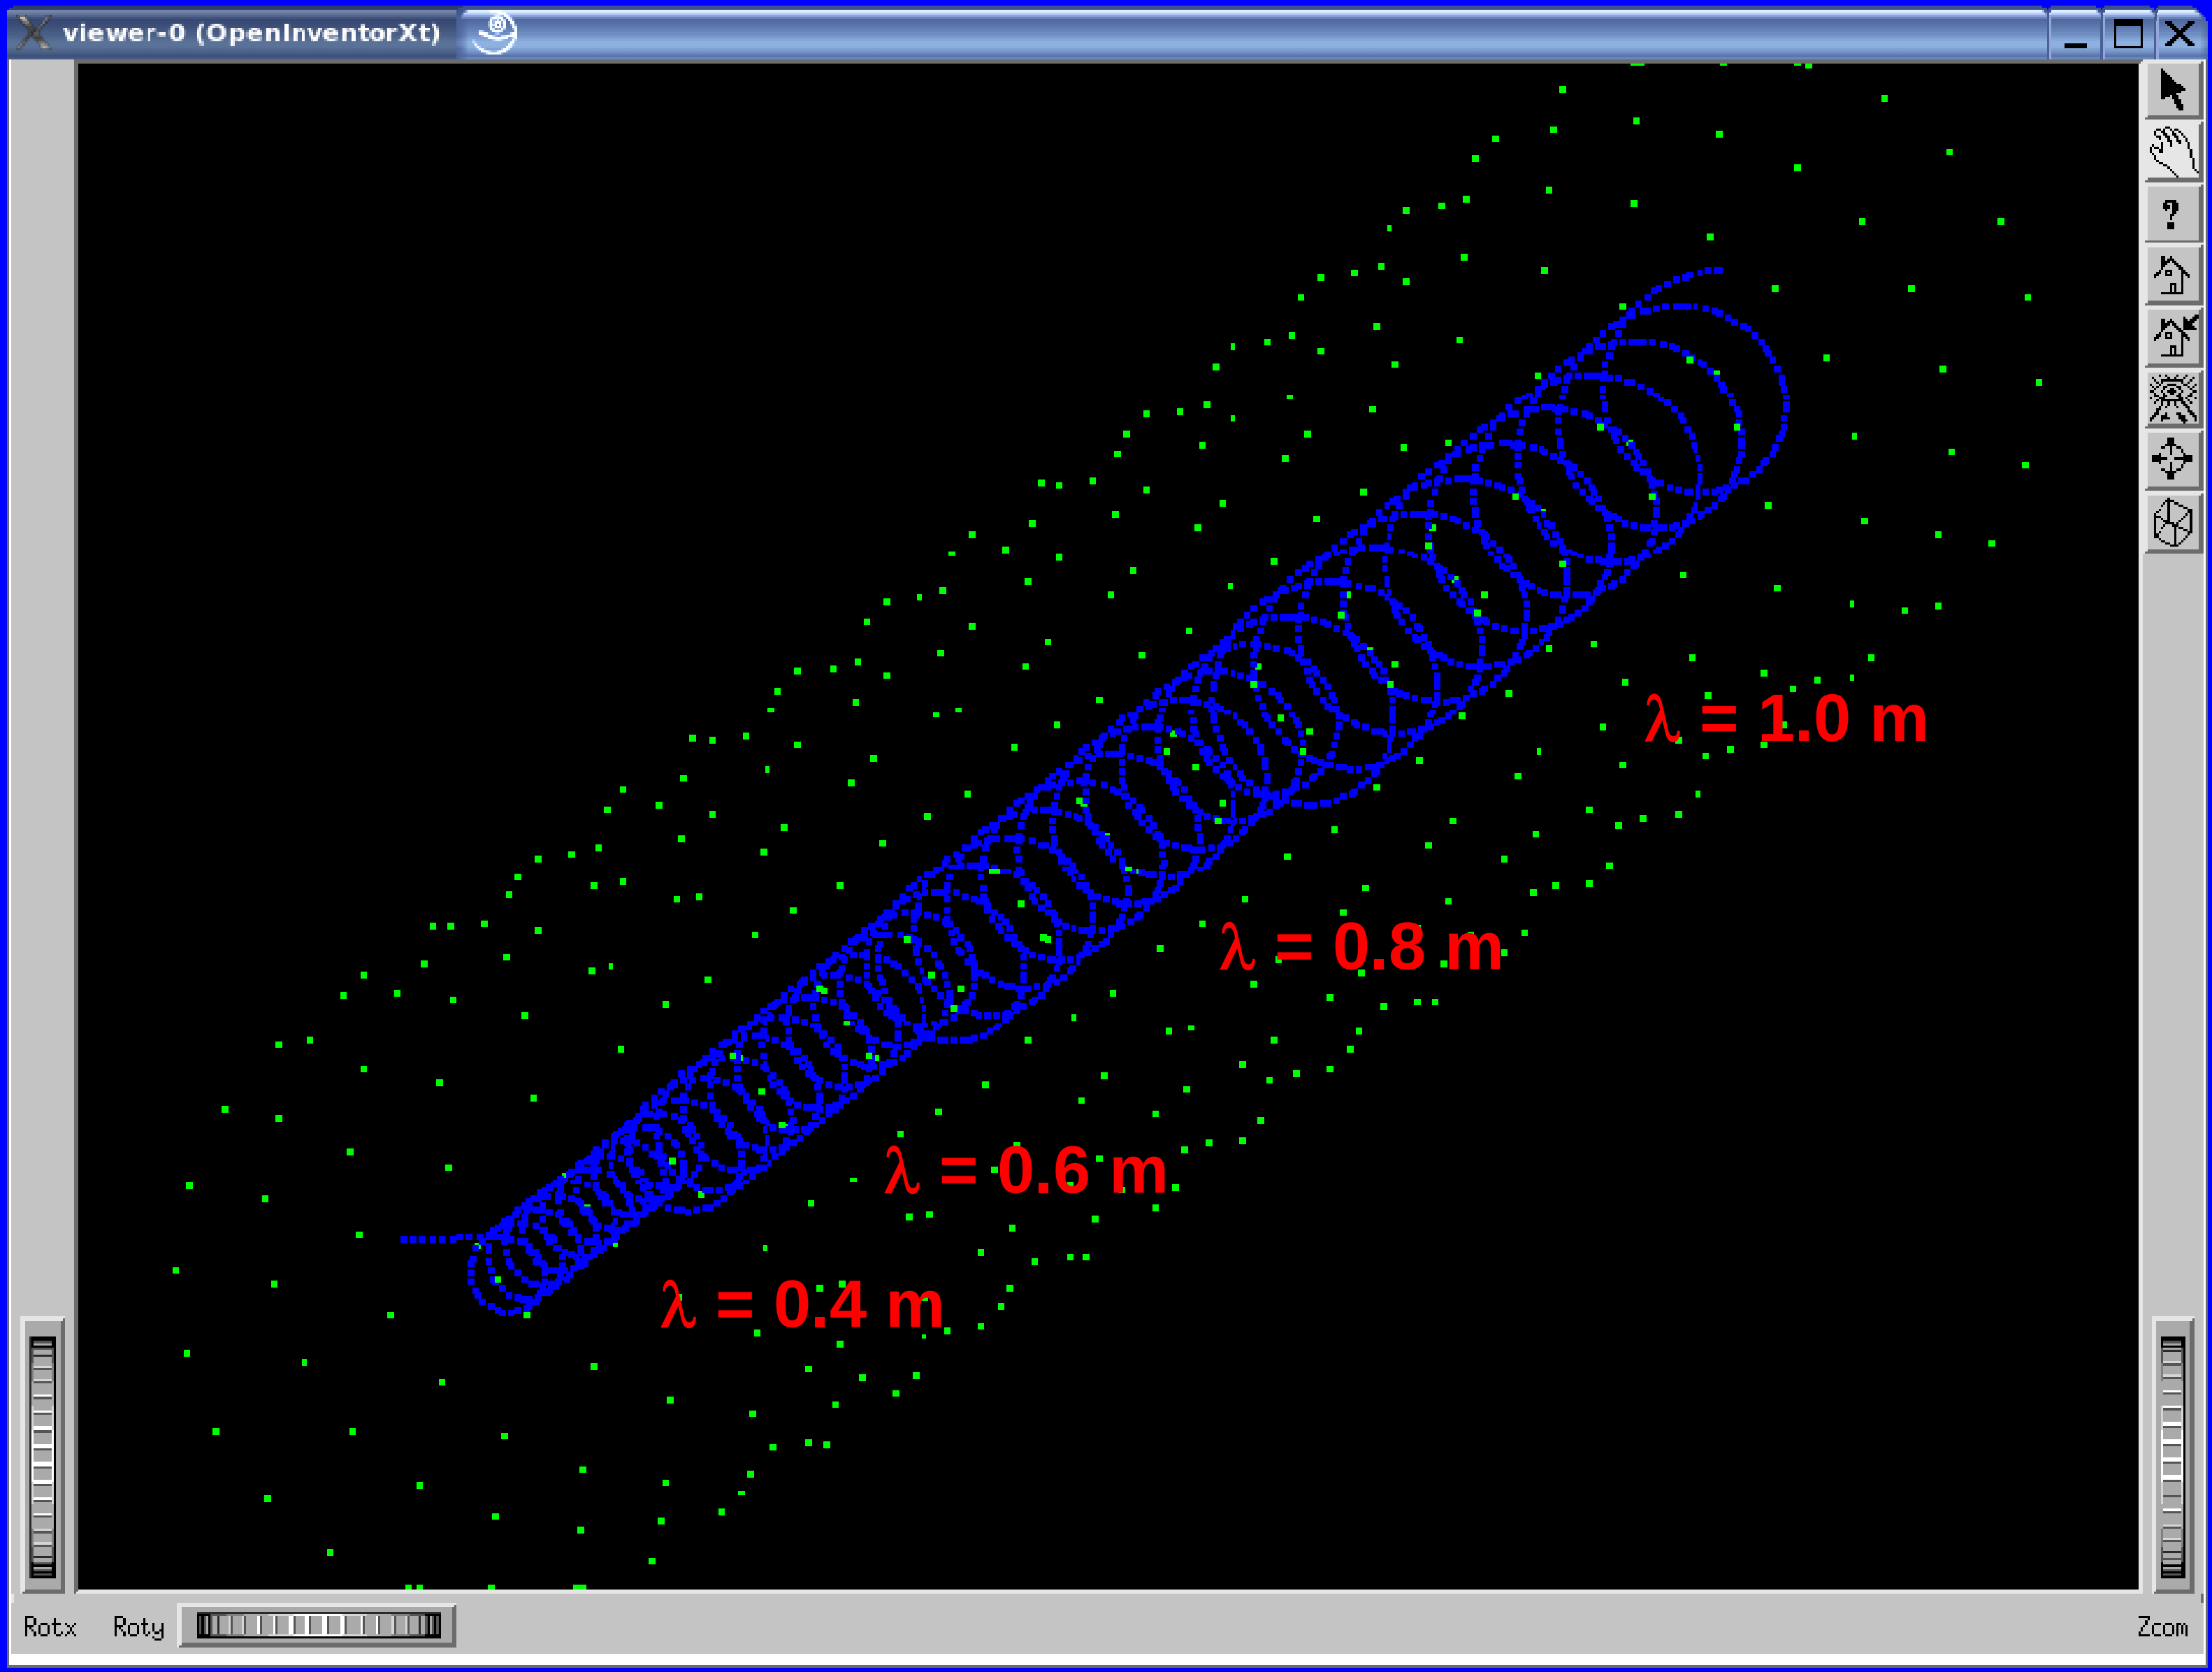

RoI

Evolution of emittances in Series of HCCs

See Poster 23 by Yonehara et al.

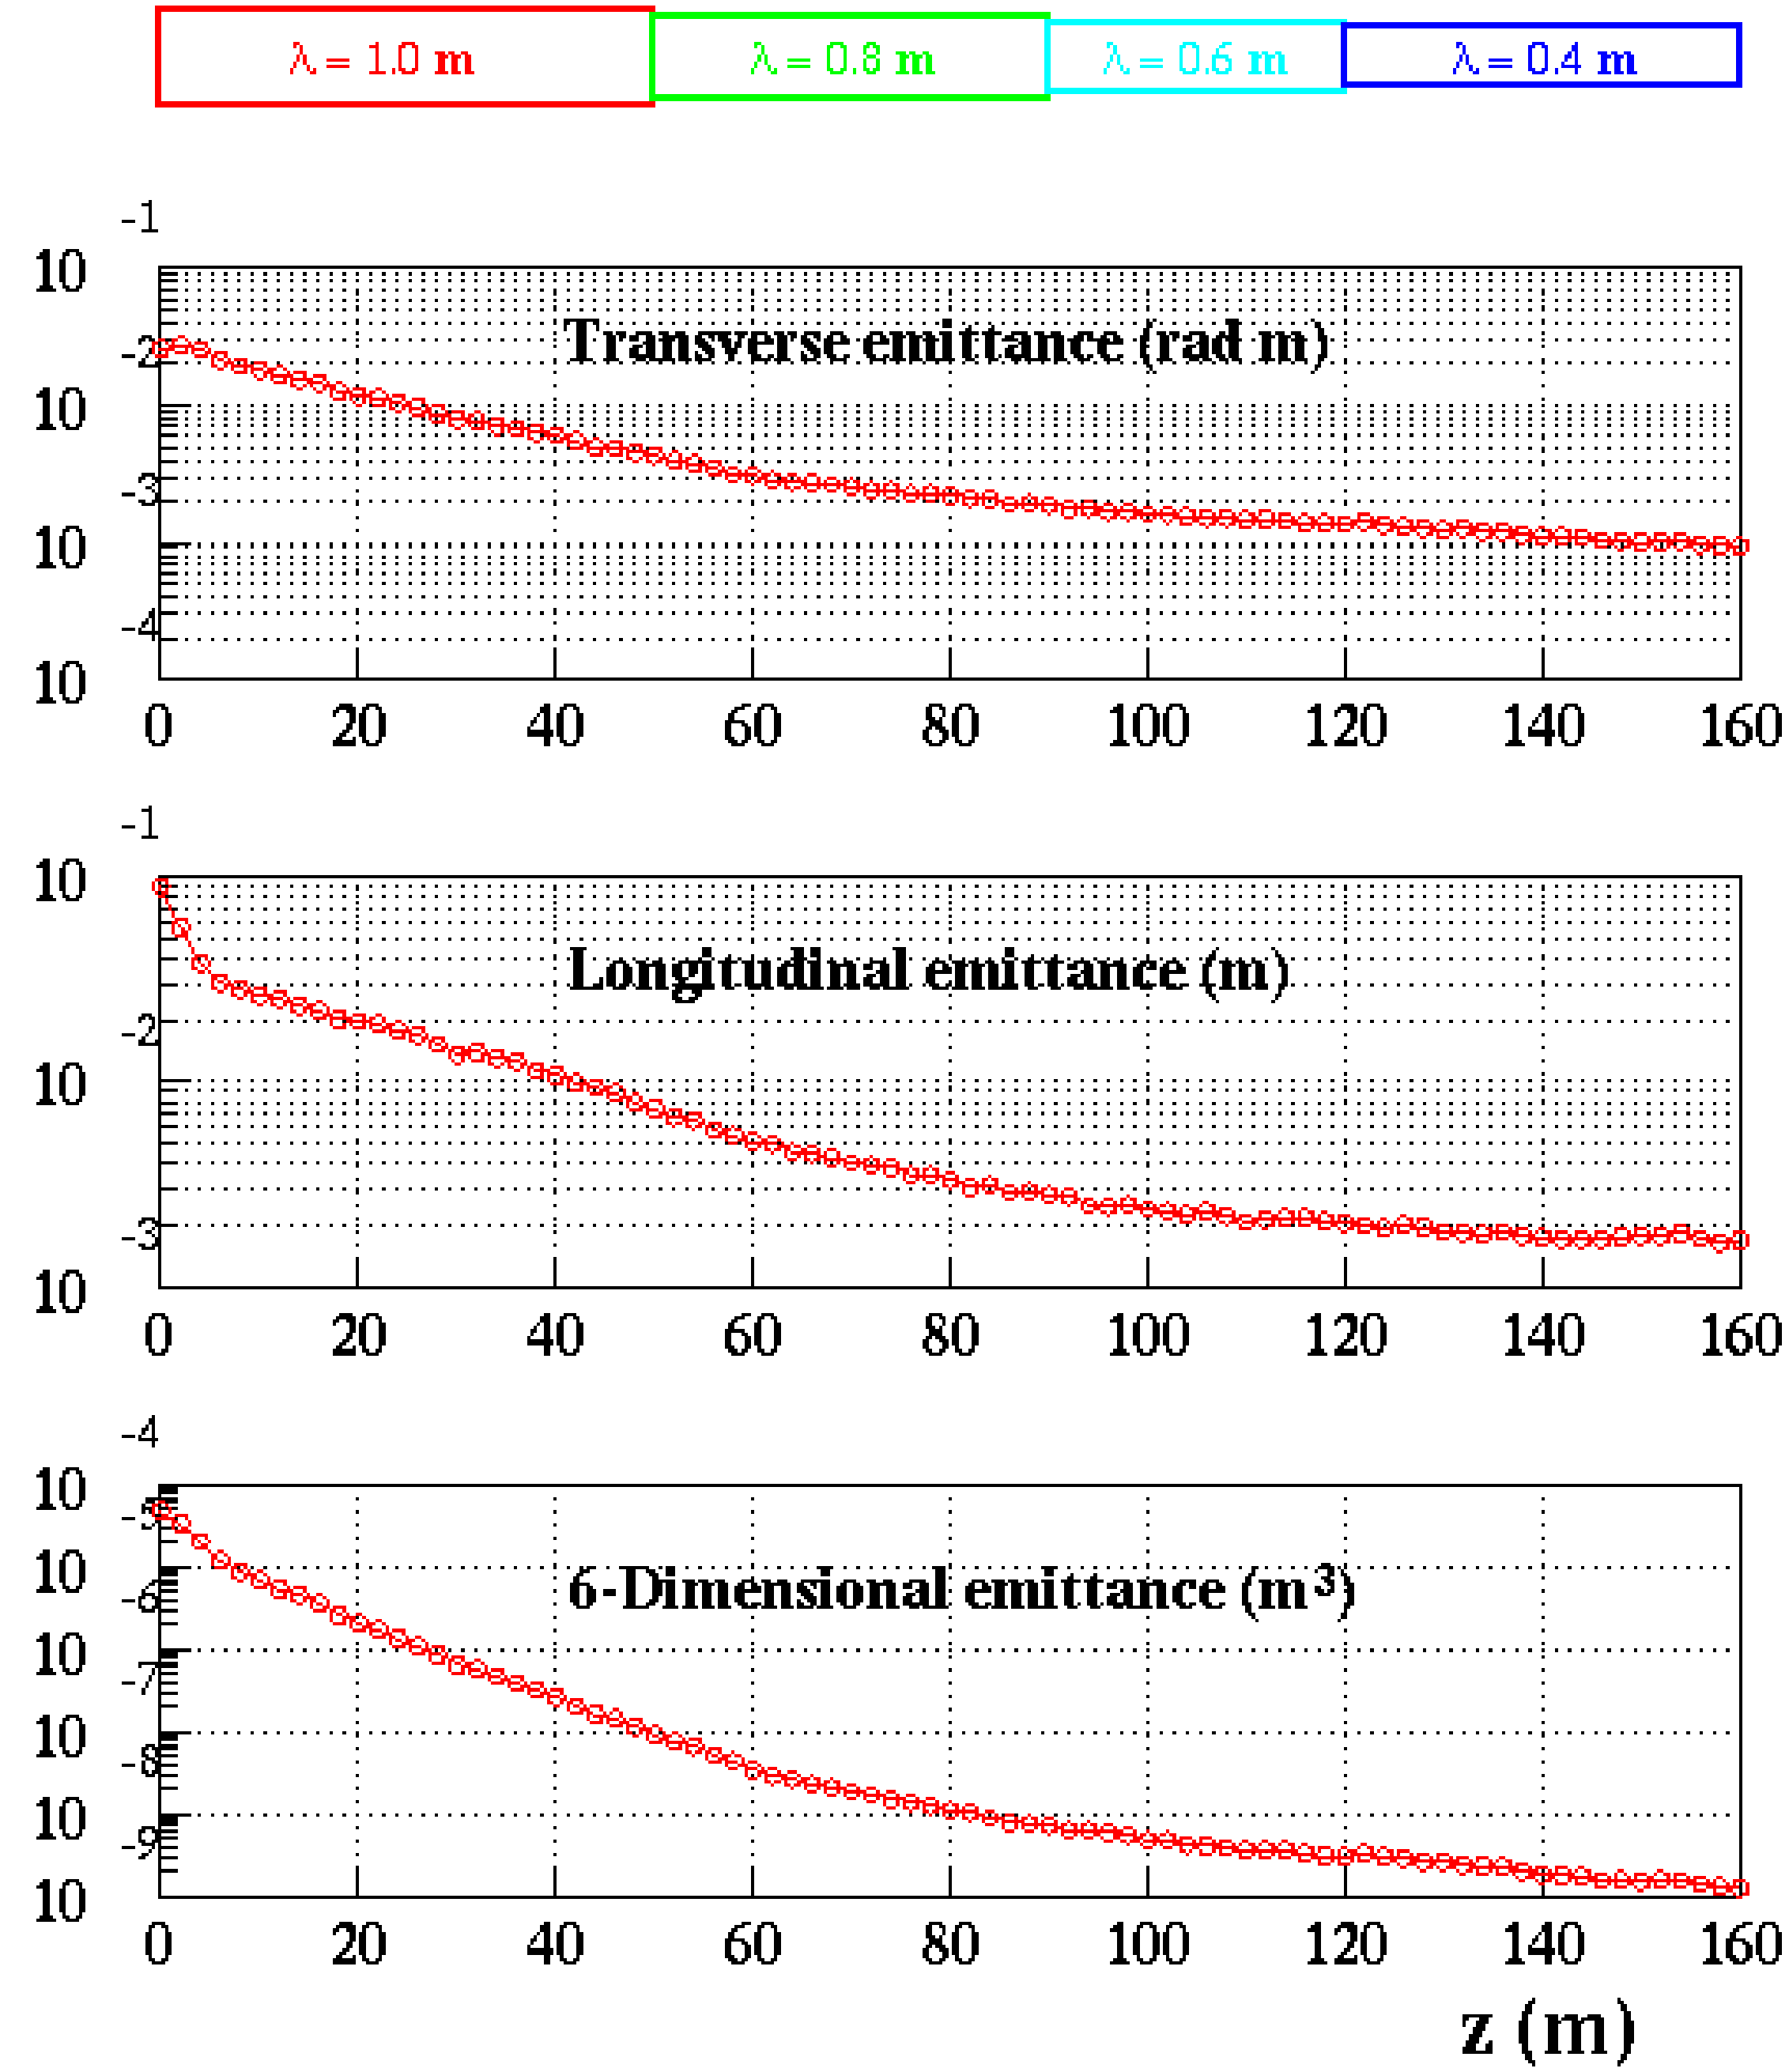

Cooling factor ~ 50,000

In a Helical Cooling Channel with period $\lambda = 2\pi / k$, the condition for a helical equilibrium orbit for a particle at radius a, momentum p, is:

$$p(a) = \frac{\sqrt{1+\kappa^2}}{k}[B - \frac{1+\kappa^2}{\kappa} b(\kappa)]$$

where $\kappa = ka = p_\perp / p_z$ is the arctan of the helix pitch angle and $b_\rho = 0$ at the periodic orbit.

Up to now, we have only considered constant field magnitudes, where the only the direction of b changes. This gives the z-independent Hamiltonian, etc.

HOWEVER we can use the equation above relating $p,\ a,\ B,\ b,\ and\ \kappa$ to manipulate the fields and helix parameters to maintain the orbit and dispersion properties. <u>The next 2 ideas use this technique to cool when particles lose their energy in an absorber and there is no RF to regenerate the lost energy</u>.

Idea #4: HCC with Z-dependent fields

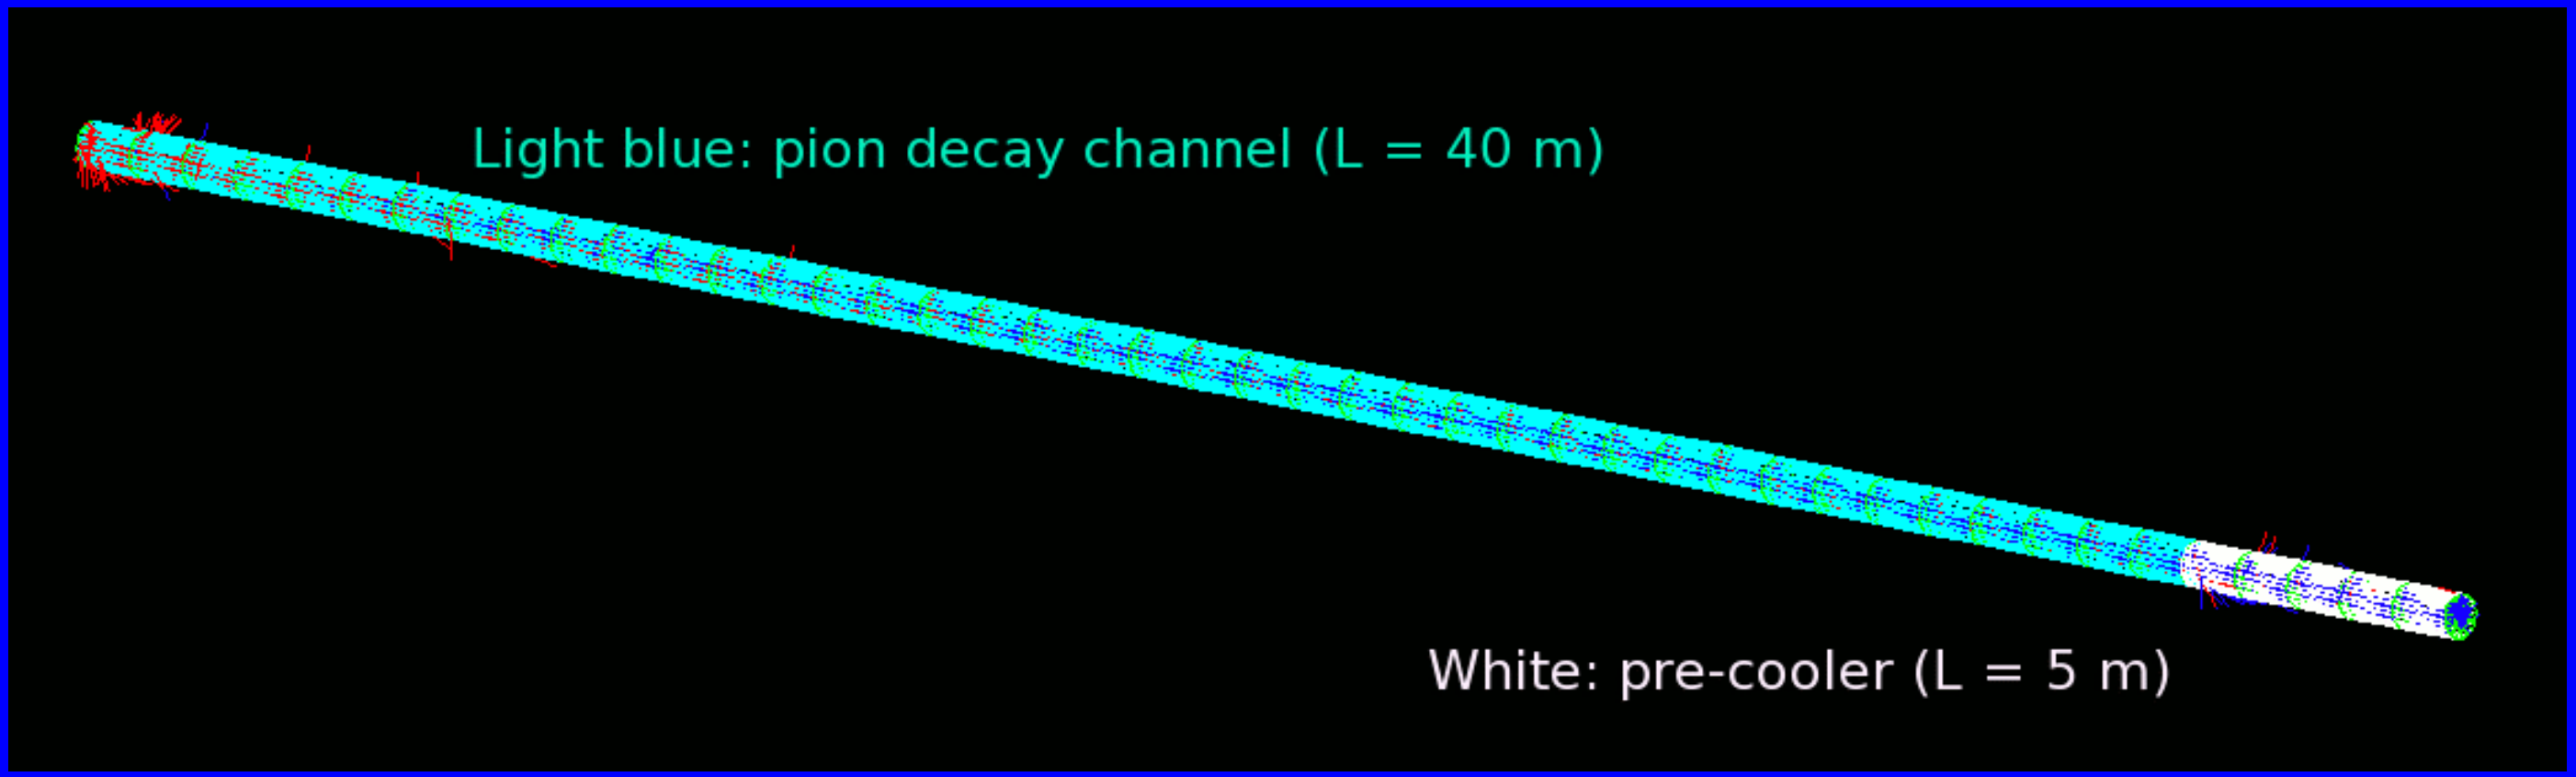

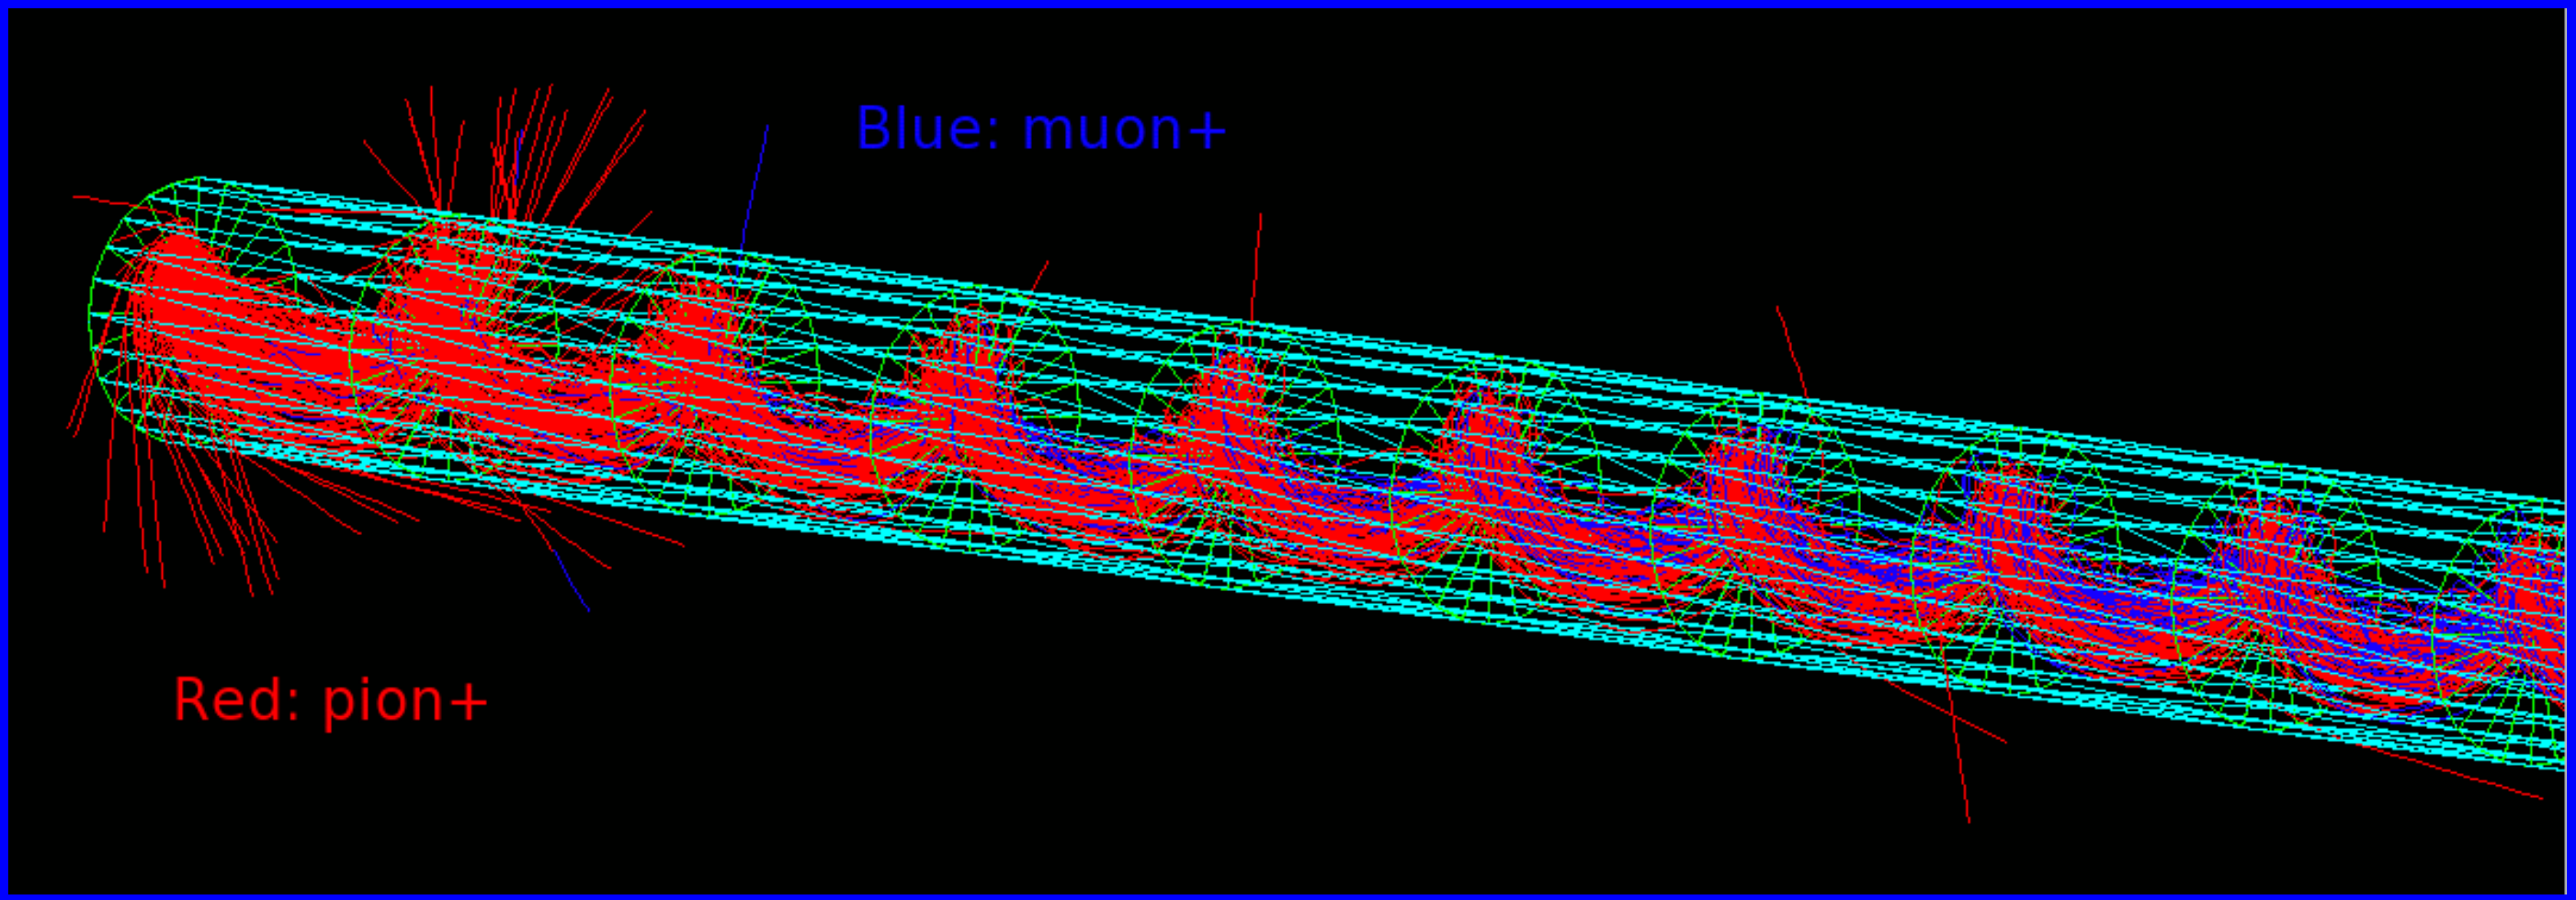

40 m evacuated helical magnet pion decay channel followed by a 5 m liquid hydrogen HCC (no RF)

5 m Precooler and MANX

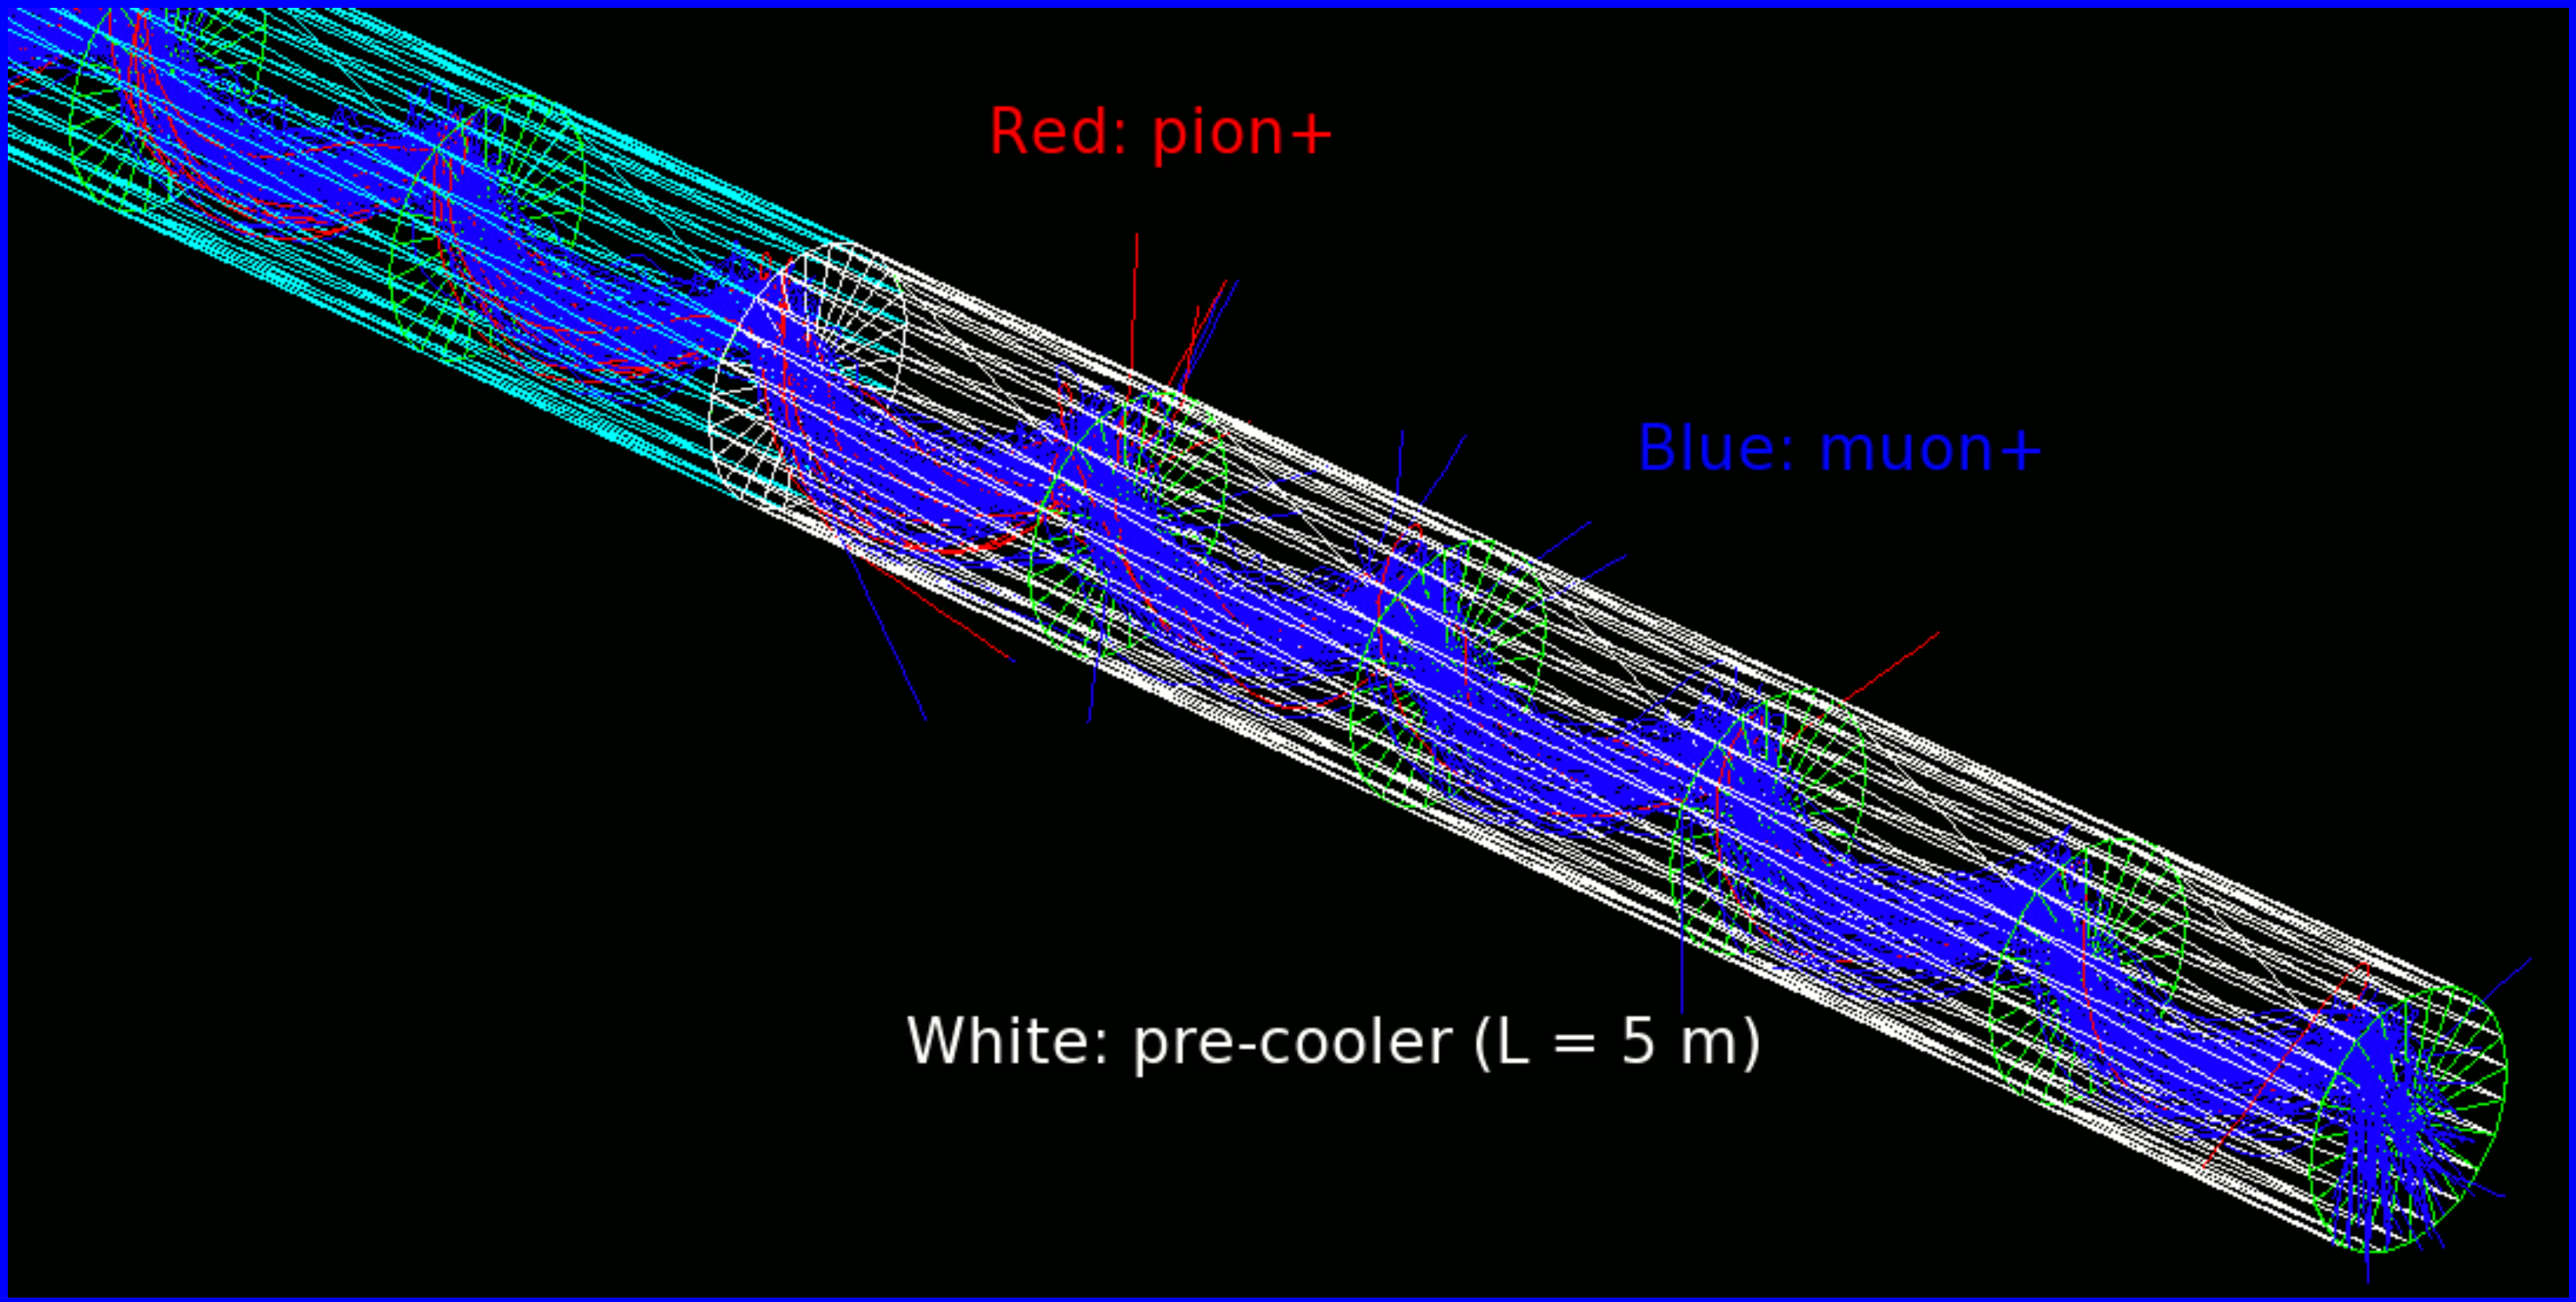

New Invention: HCC with fields that decrease with momentum. Here the beam decelerates in liquid hydrogen (white region) while the fields diminish accordingly.

First G4BL Precooler Simulation

Equal decrement case.

~x1.7 in each direction.

Total 6D emittance reduction ~factor of 5.5

Note this would require serious magnets: ~10 T at conductor for 300 to 100 MeV/c deceleration

MANX results below show LHe absorber with B <5.5 T will also work!

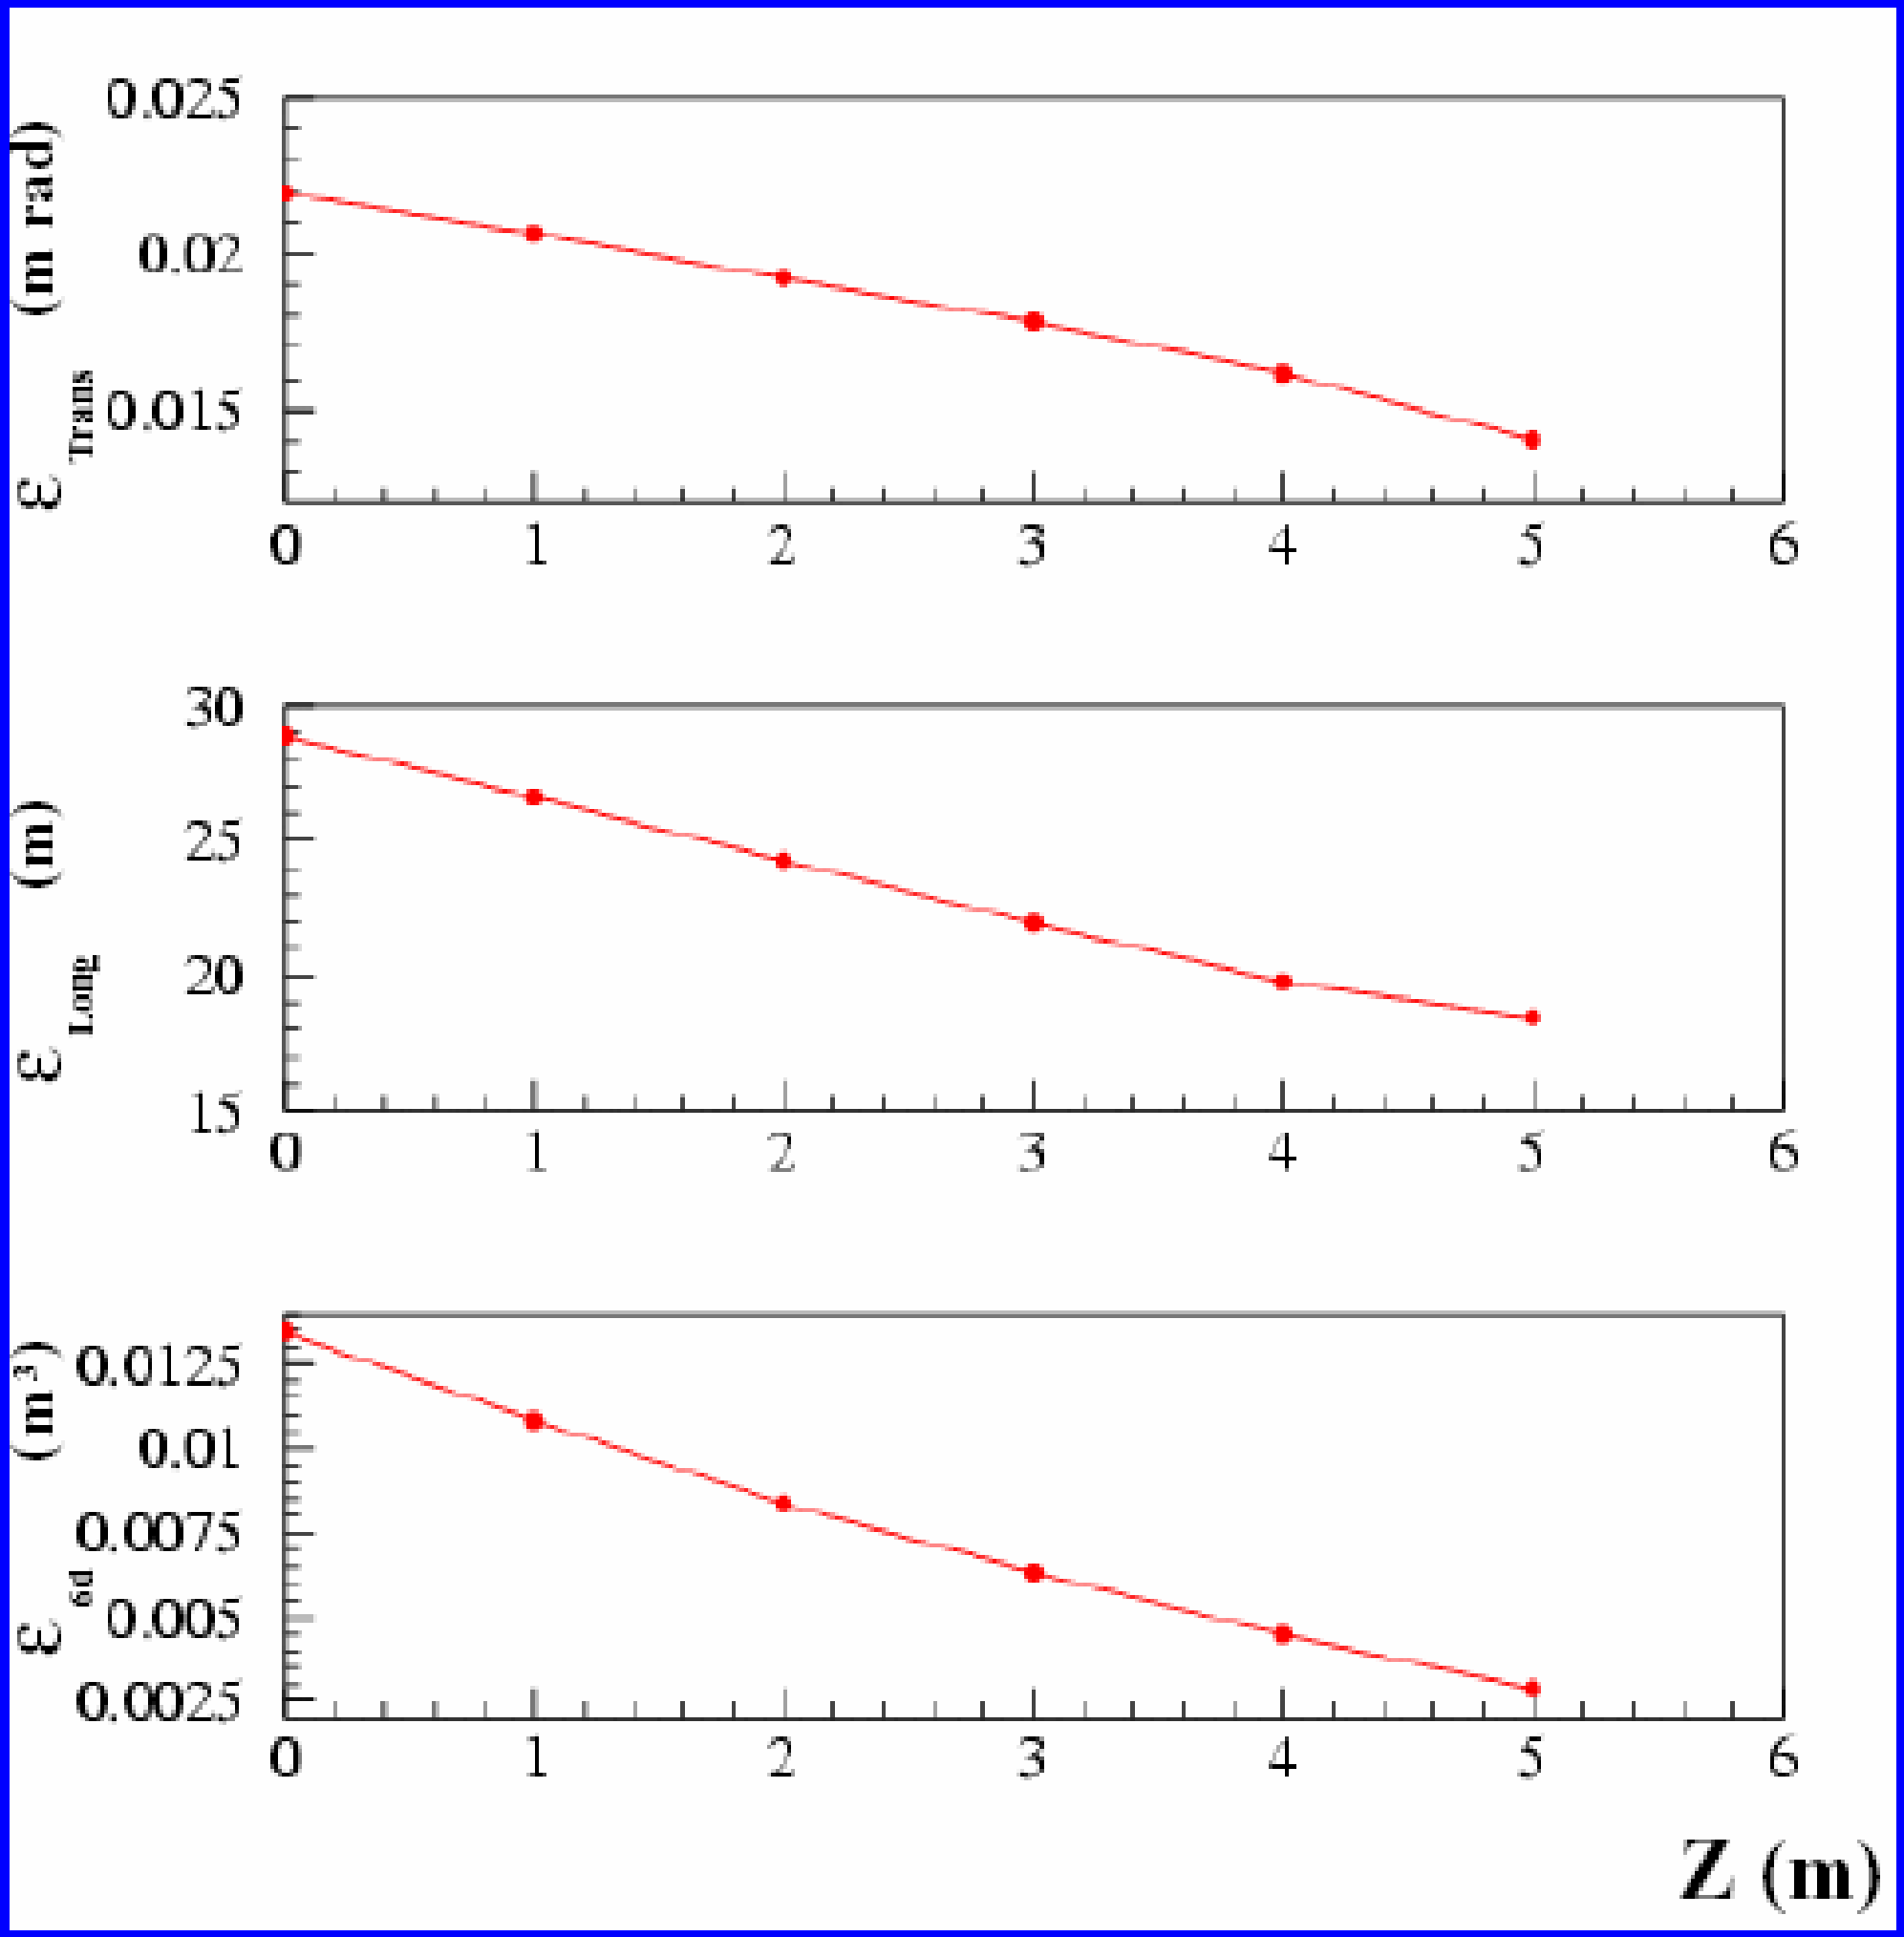

Idea #5: MANX 6-d demonstration experiment

Muon Collider And Neutrino Factory eXperiment

- To Demonstrate
  - Longitudinal cooling
  - 6D cooling in cont. absorber
  - Prototype precooler
  - Helical Cooling Channel
  - Alternate to continuous RF
    - 5.5^8 ~ 10^6 6D emittance reduction with 8 HCC sections of absorber alternating with RF sections.
  - New technology

Thomas J. Roberts et al., A Muon Cooling Demonstration Experiment, PAC05

G4BL MANX with MICE spectrometers

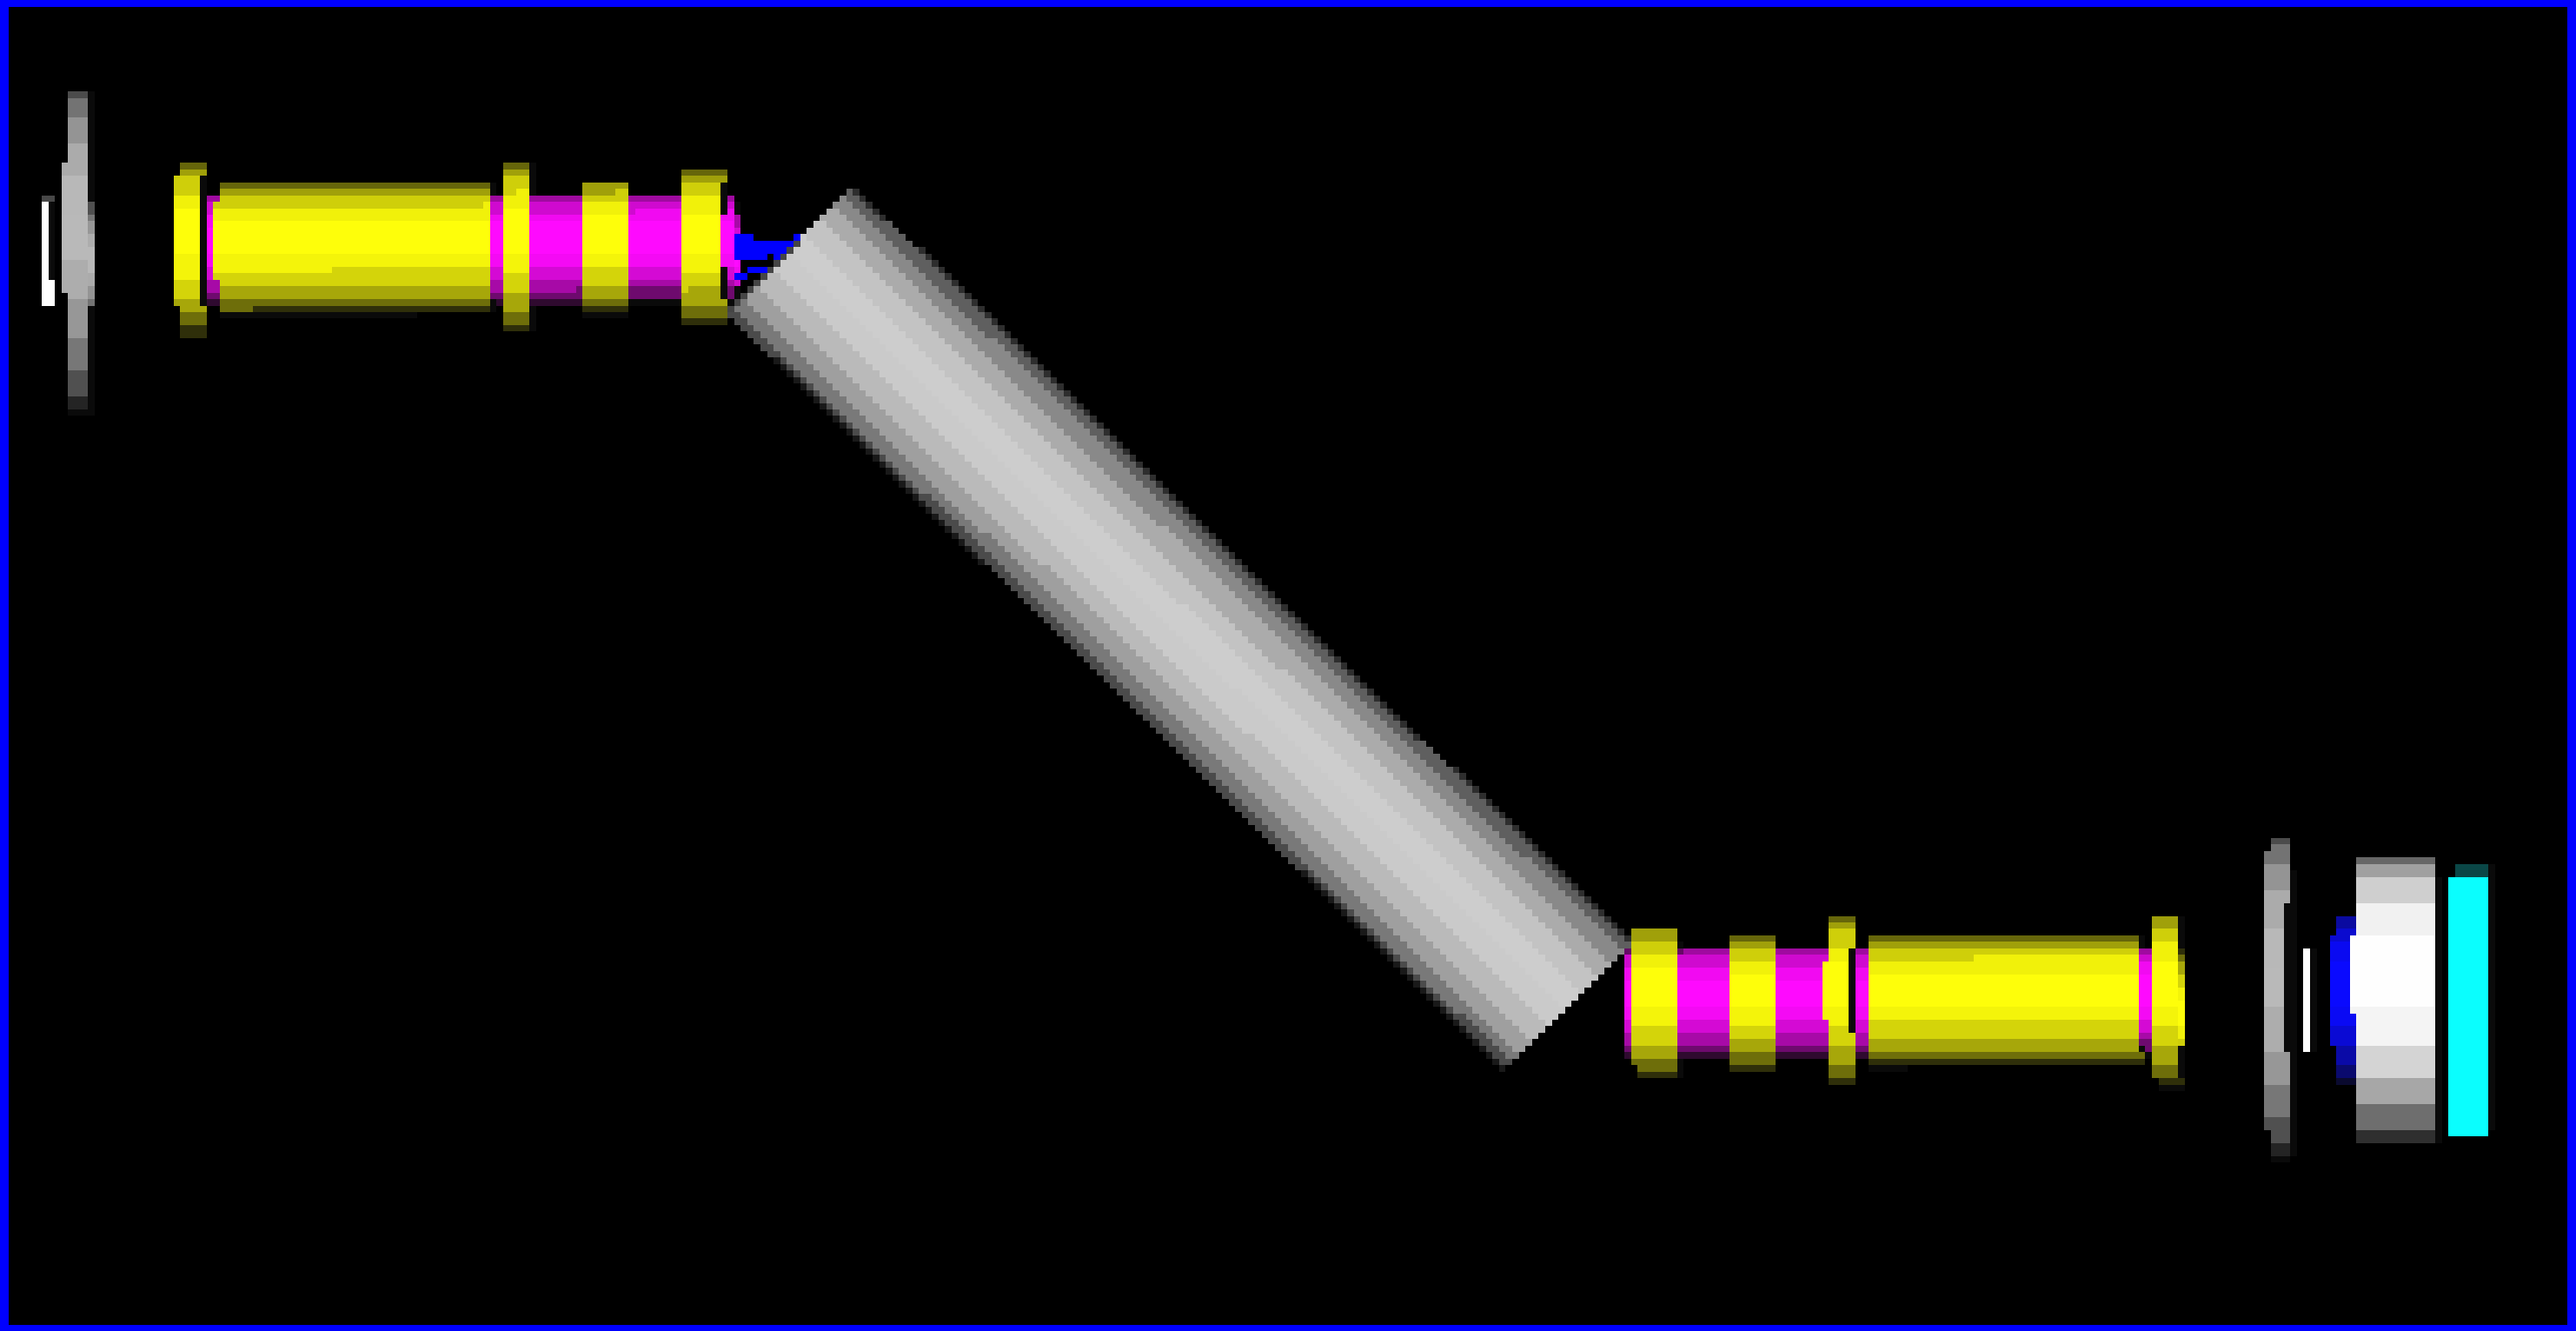

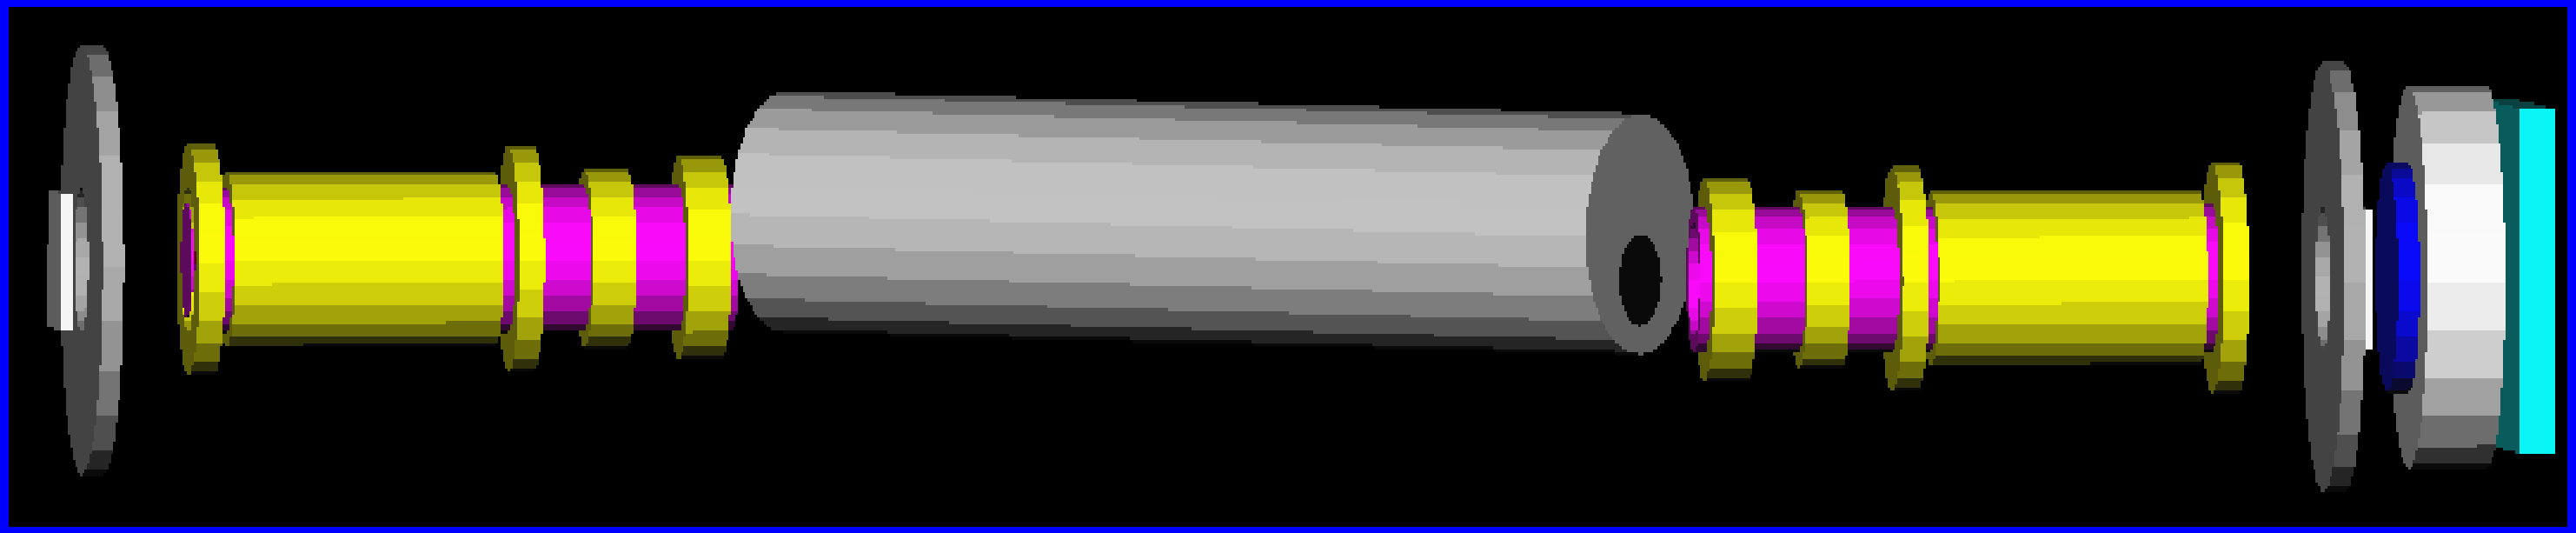

Muon Trajectories in 3-m MANX

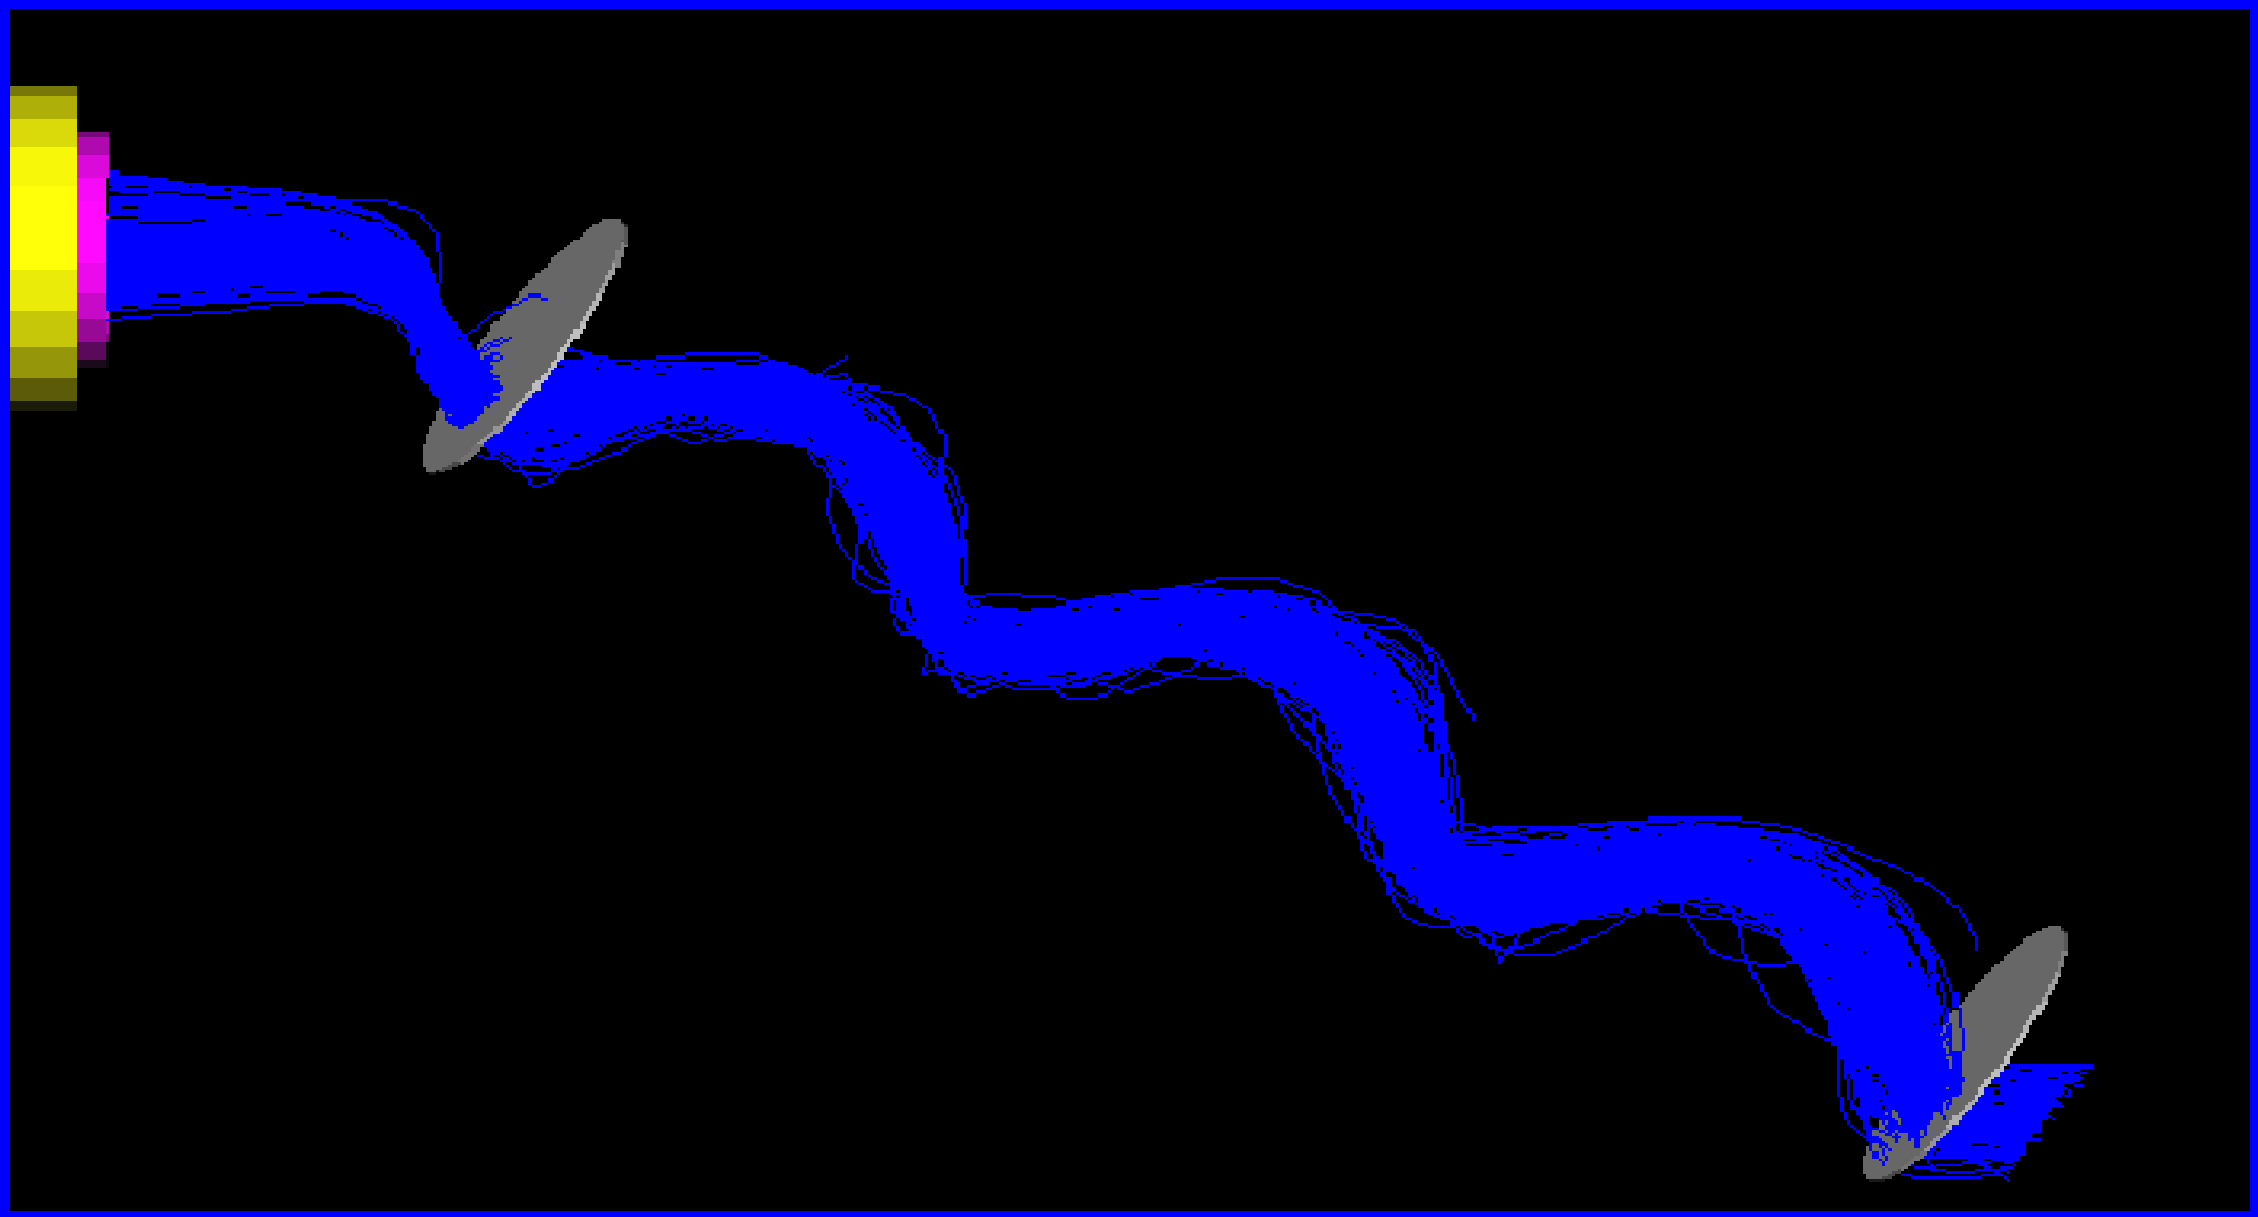

The design of the coils and cryostat are the next steps for MANX, as seen in the next slides on the technology of the HCC.

Evolution of emittances in LHe MANX
See Yonehara poster P23 tomorrow

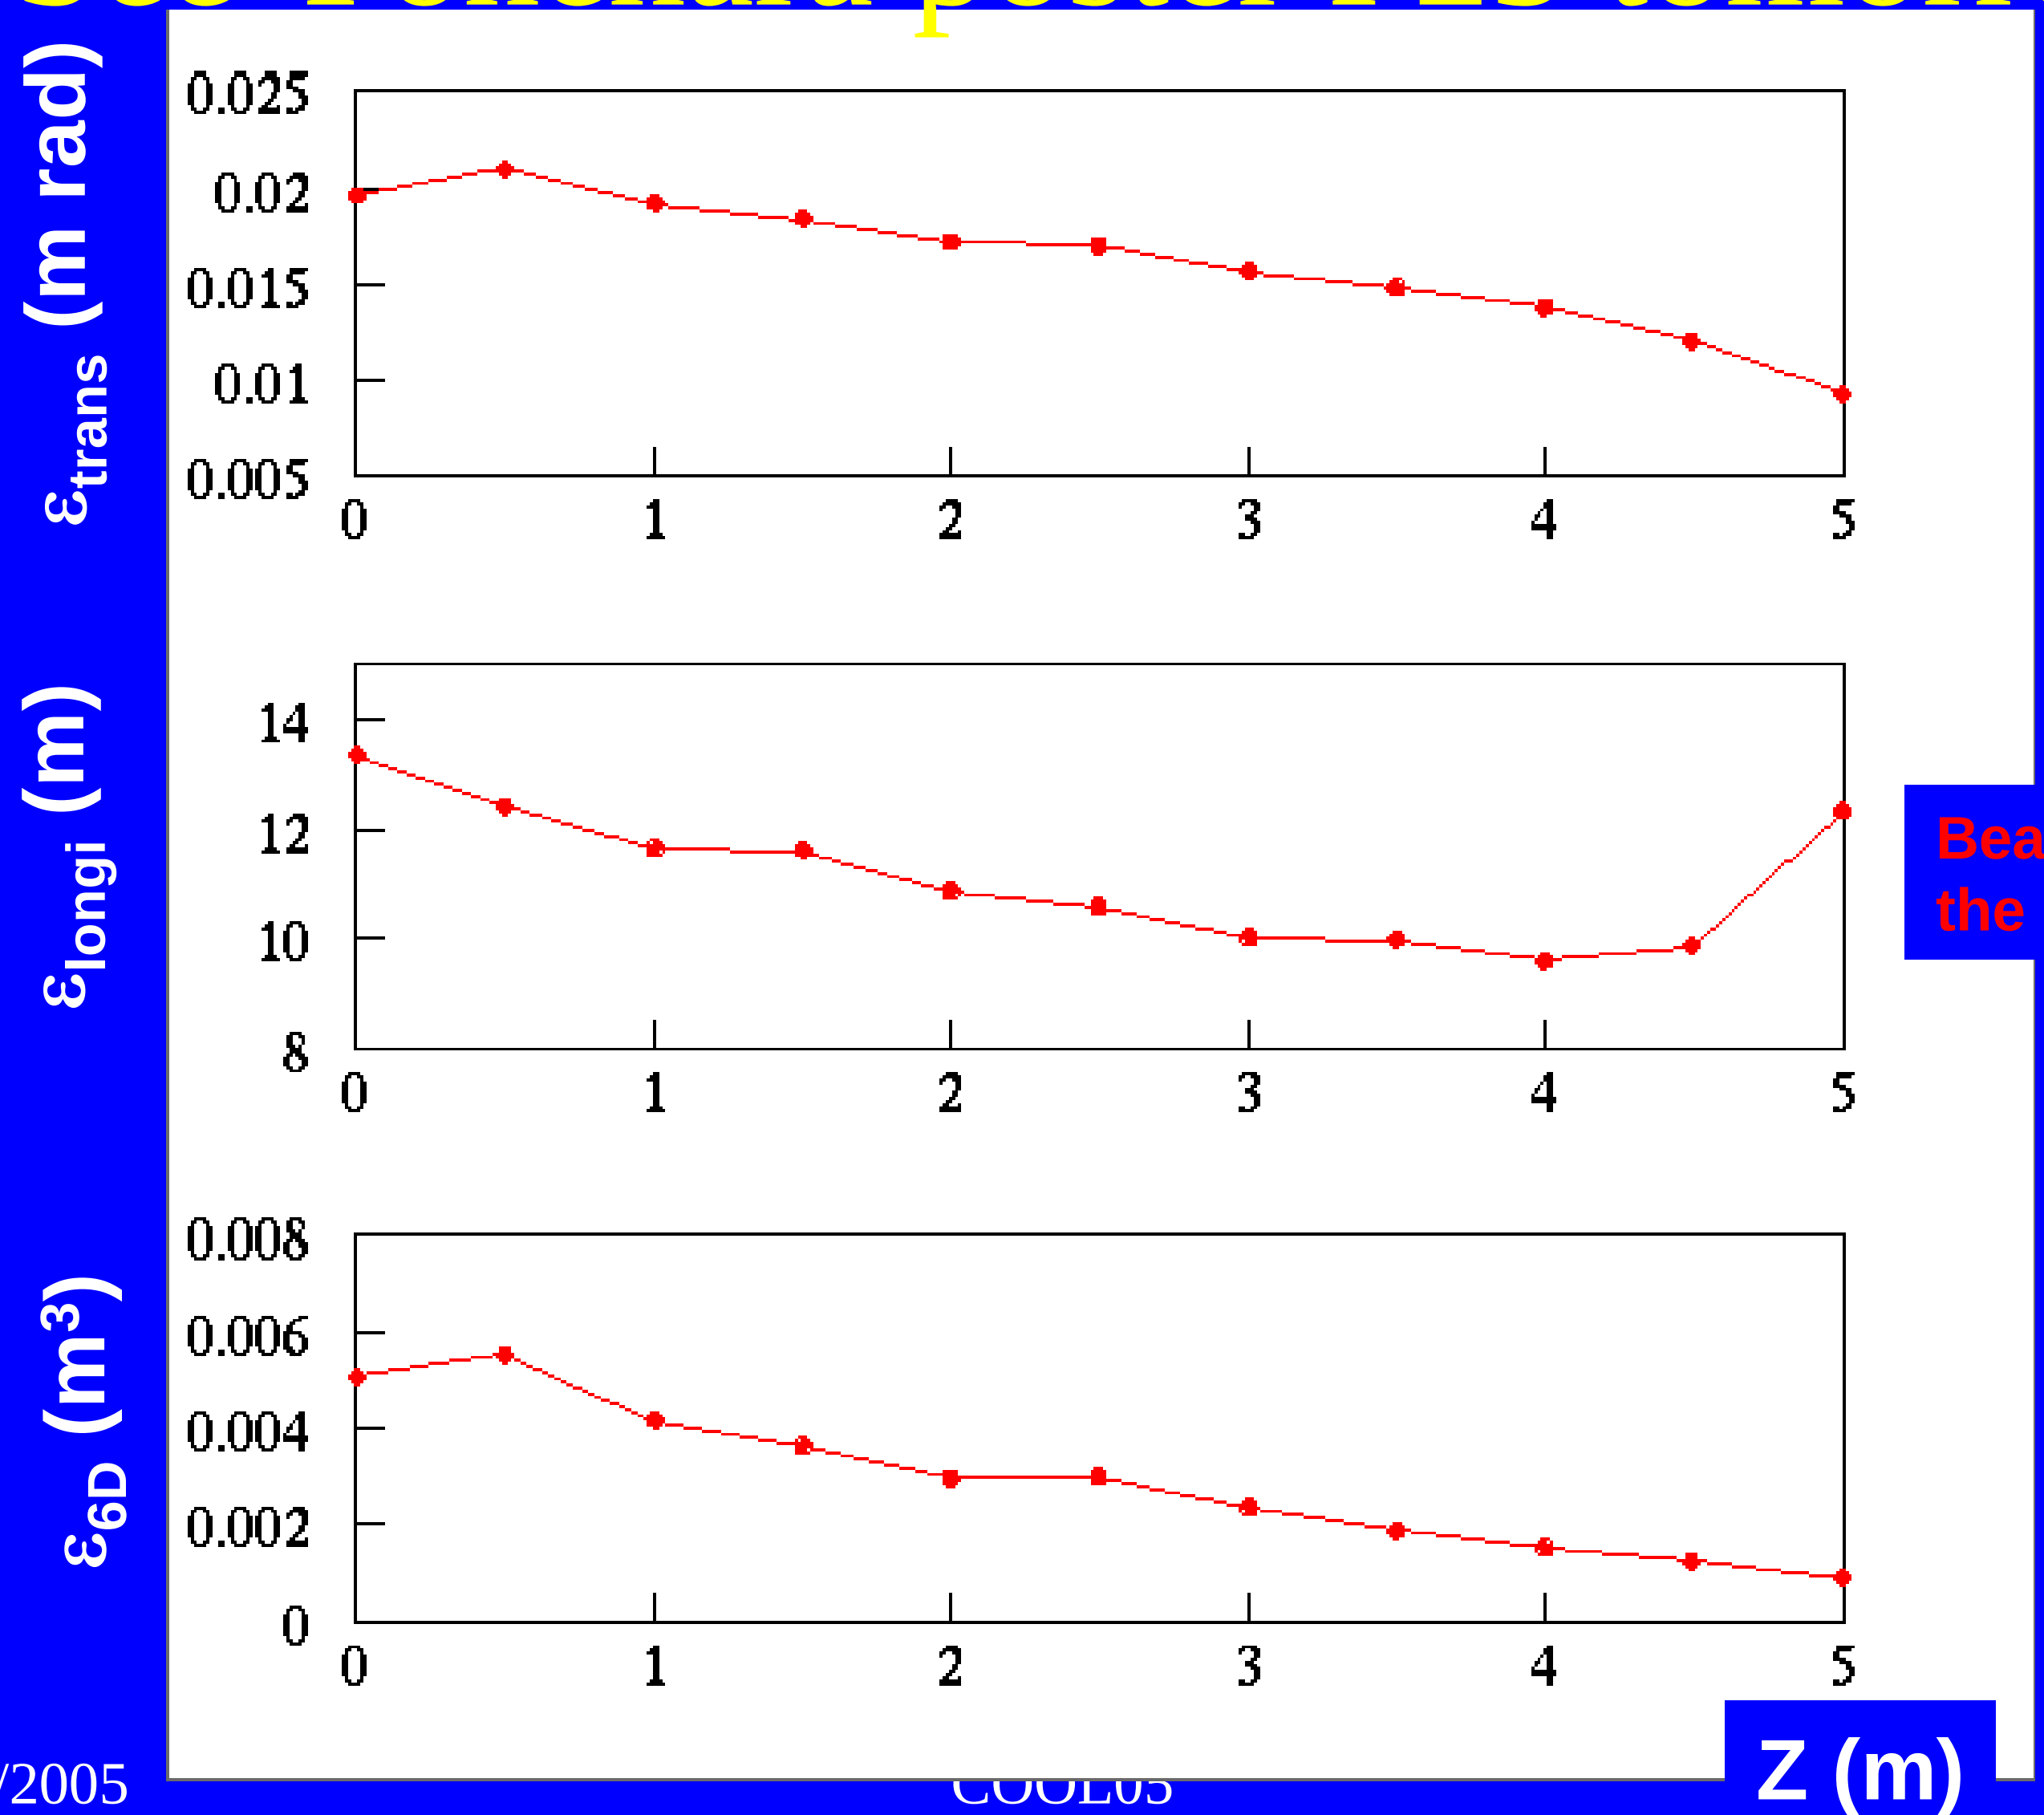

Beam is heated at the end of channel

NEW Phase II Grant to study HCC Technology

Phase I Fermilab TD Measurements

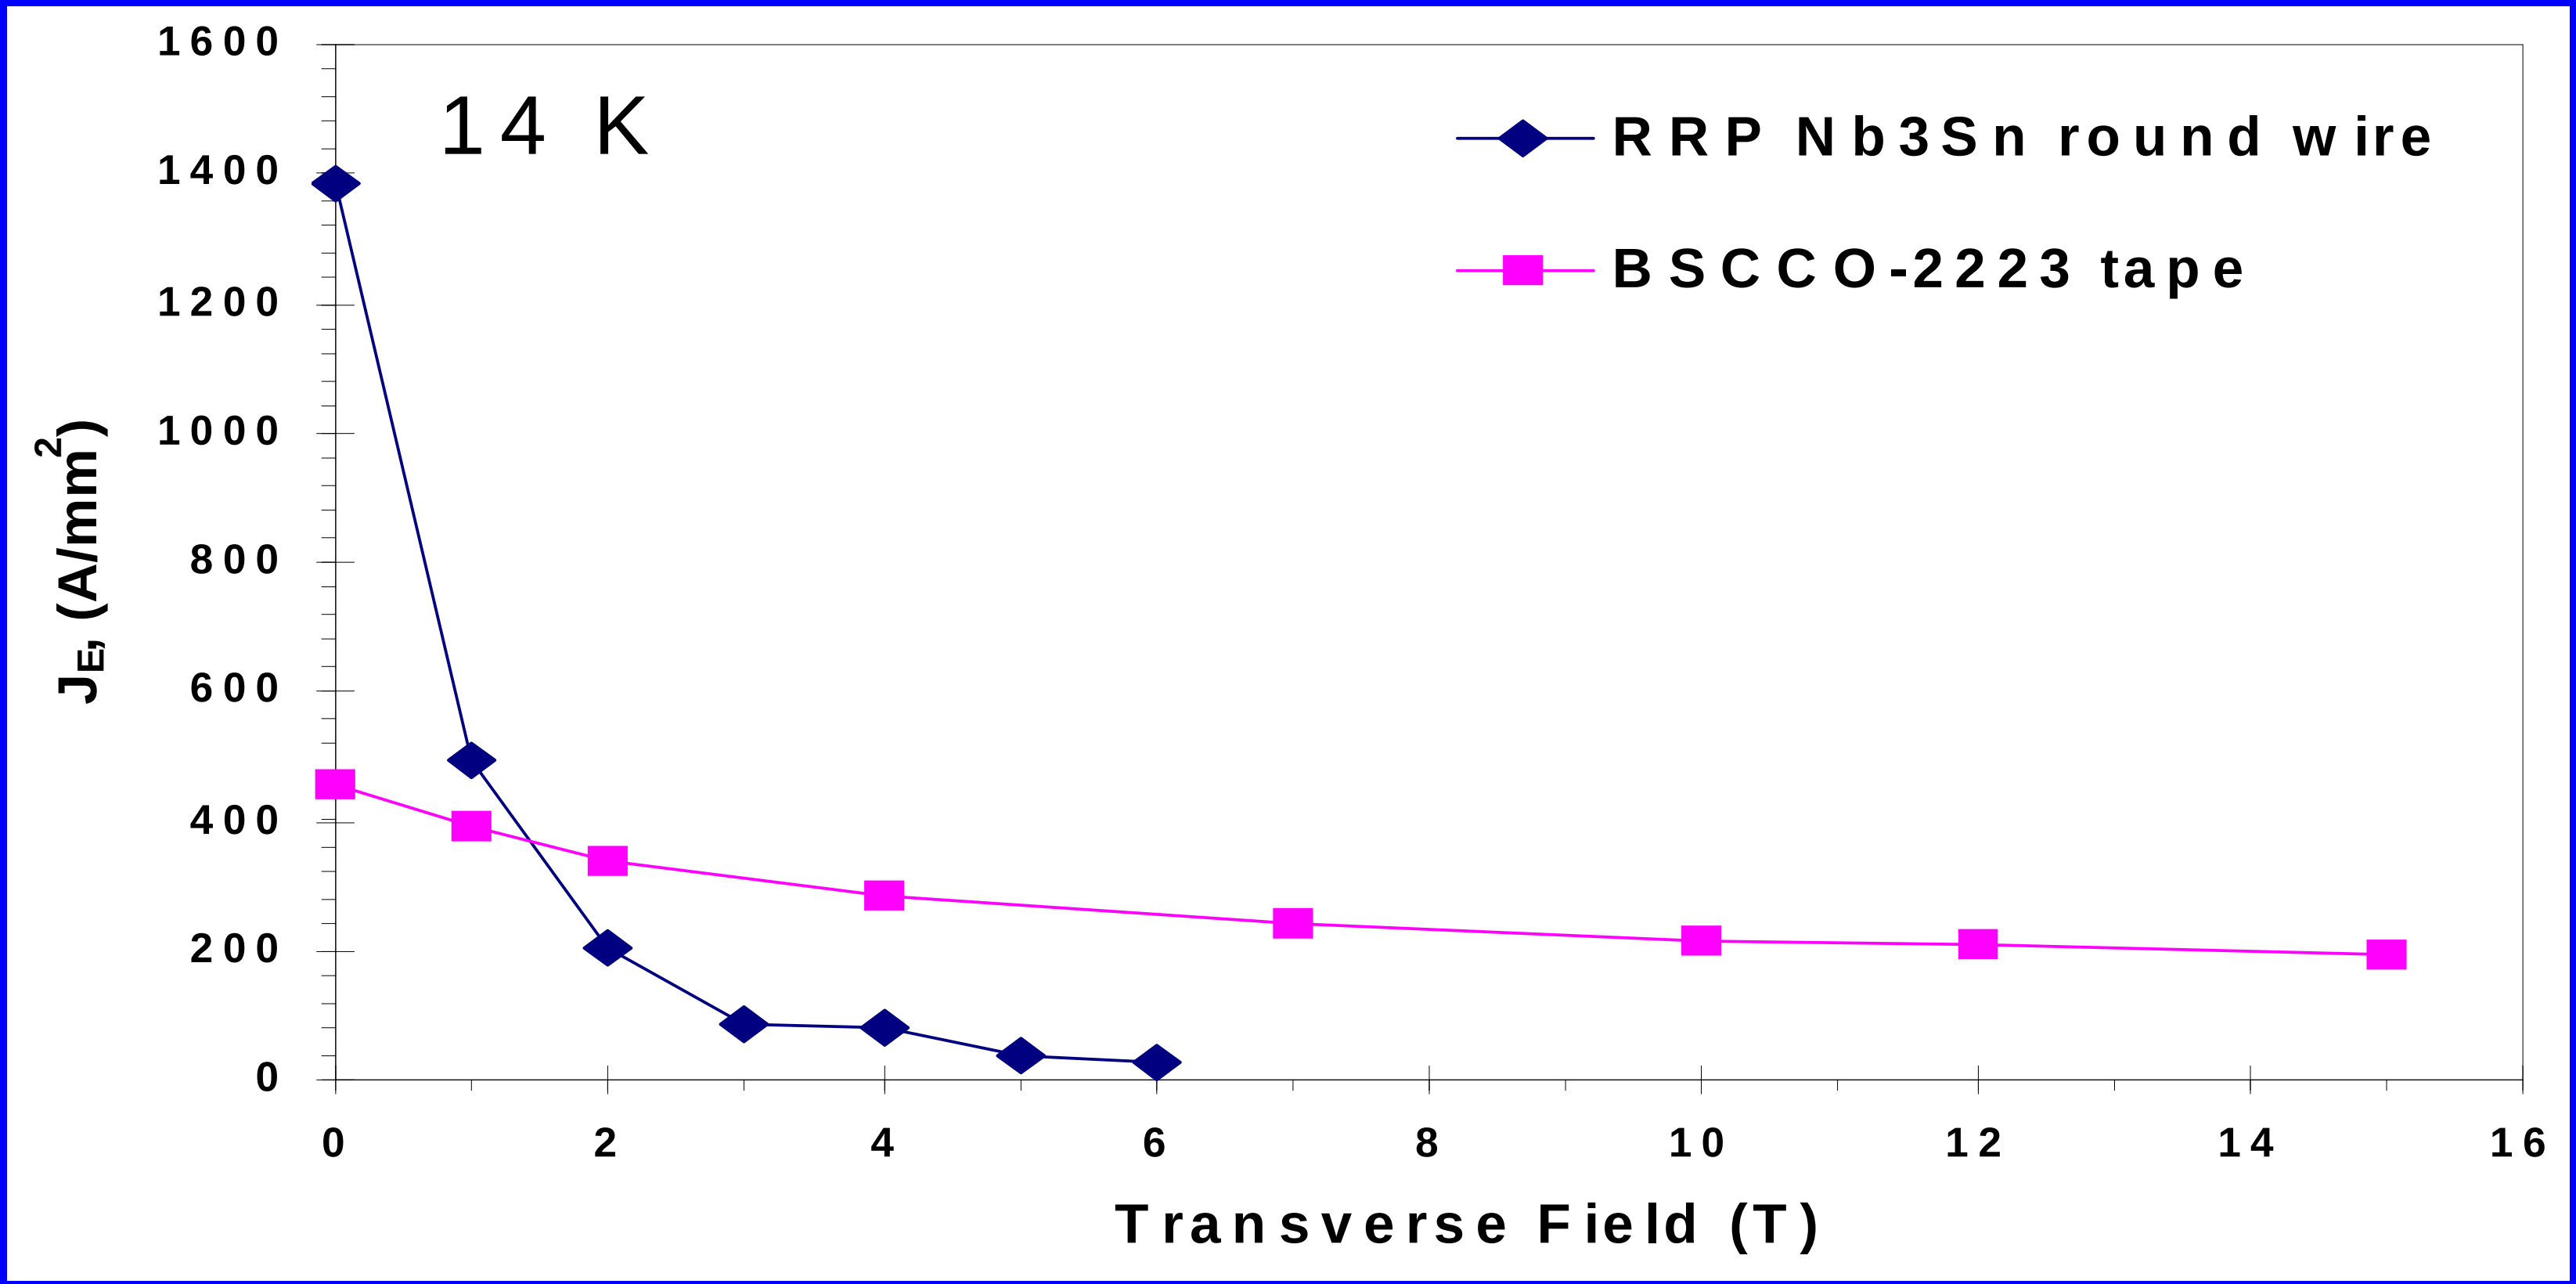

Fig. 9. Comparison of the engineering critical current density, J_E, at 14 K as a function of magnetic field between BSCCO-2223 tape and RRP Nb_3Sn round wire.

Licia Del Frate et al., Novel Muon Cooling Channels Using Hydrogen Refrigeration and HT Superconductor, PAC05

MANX/Precooler H2 or He Cryostat

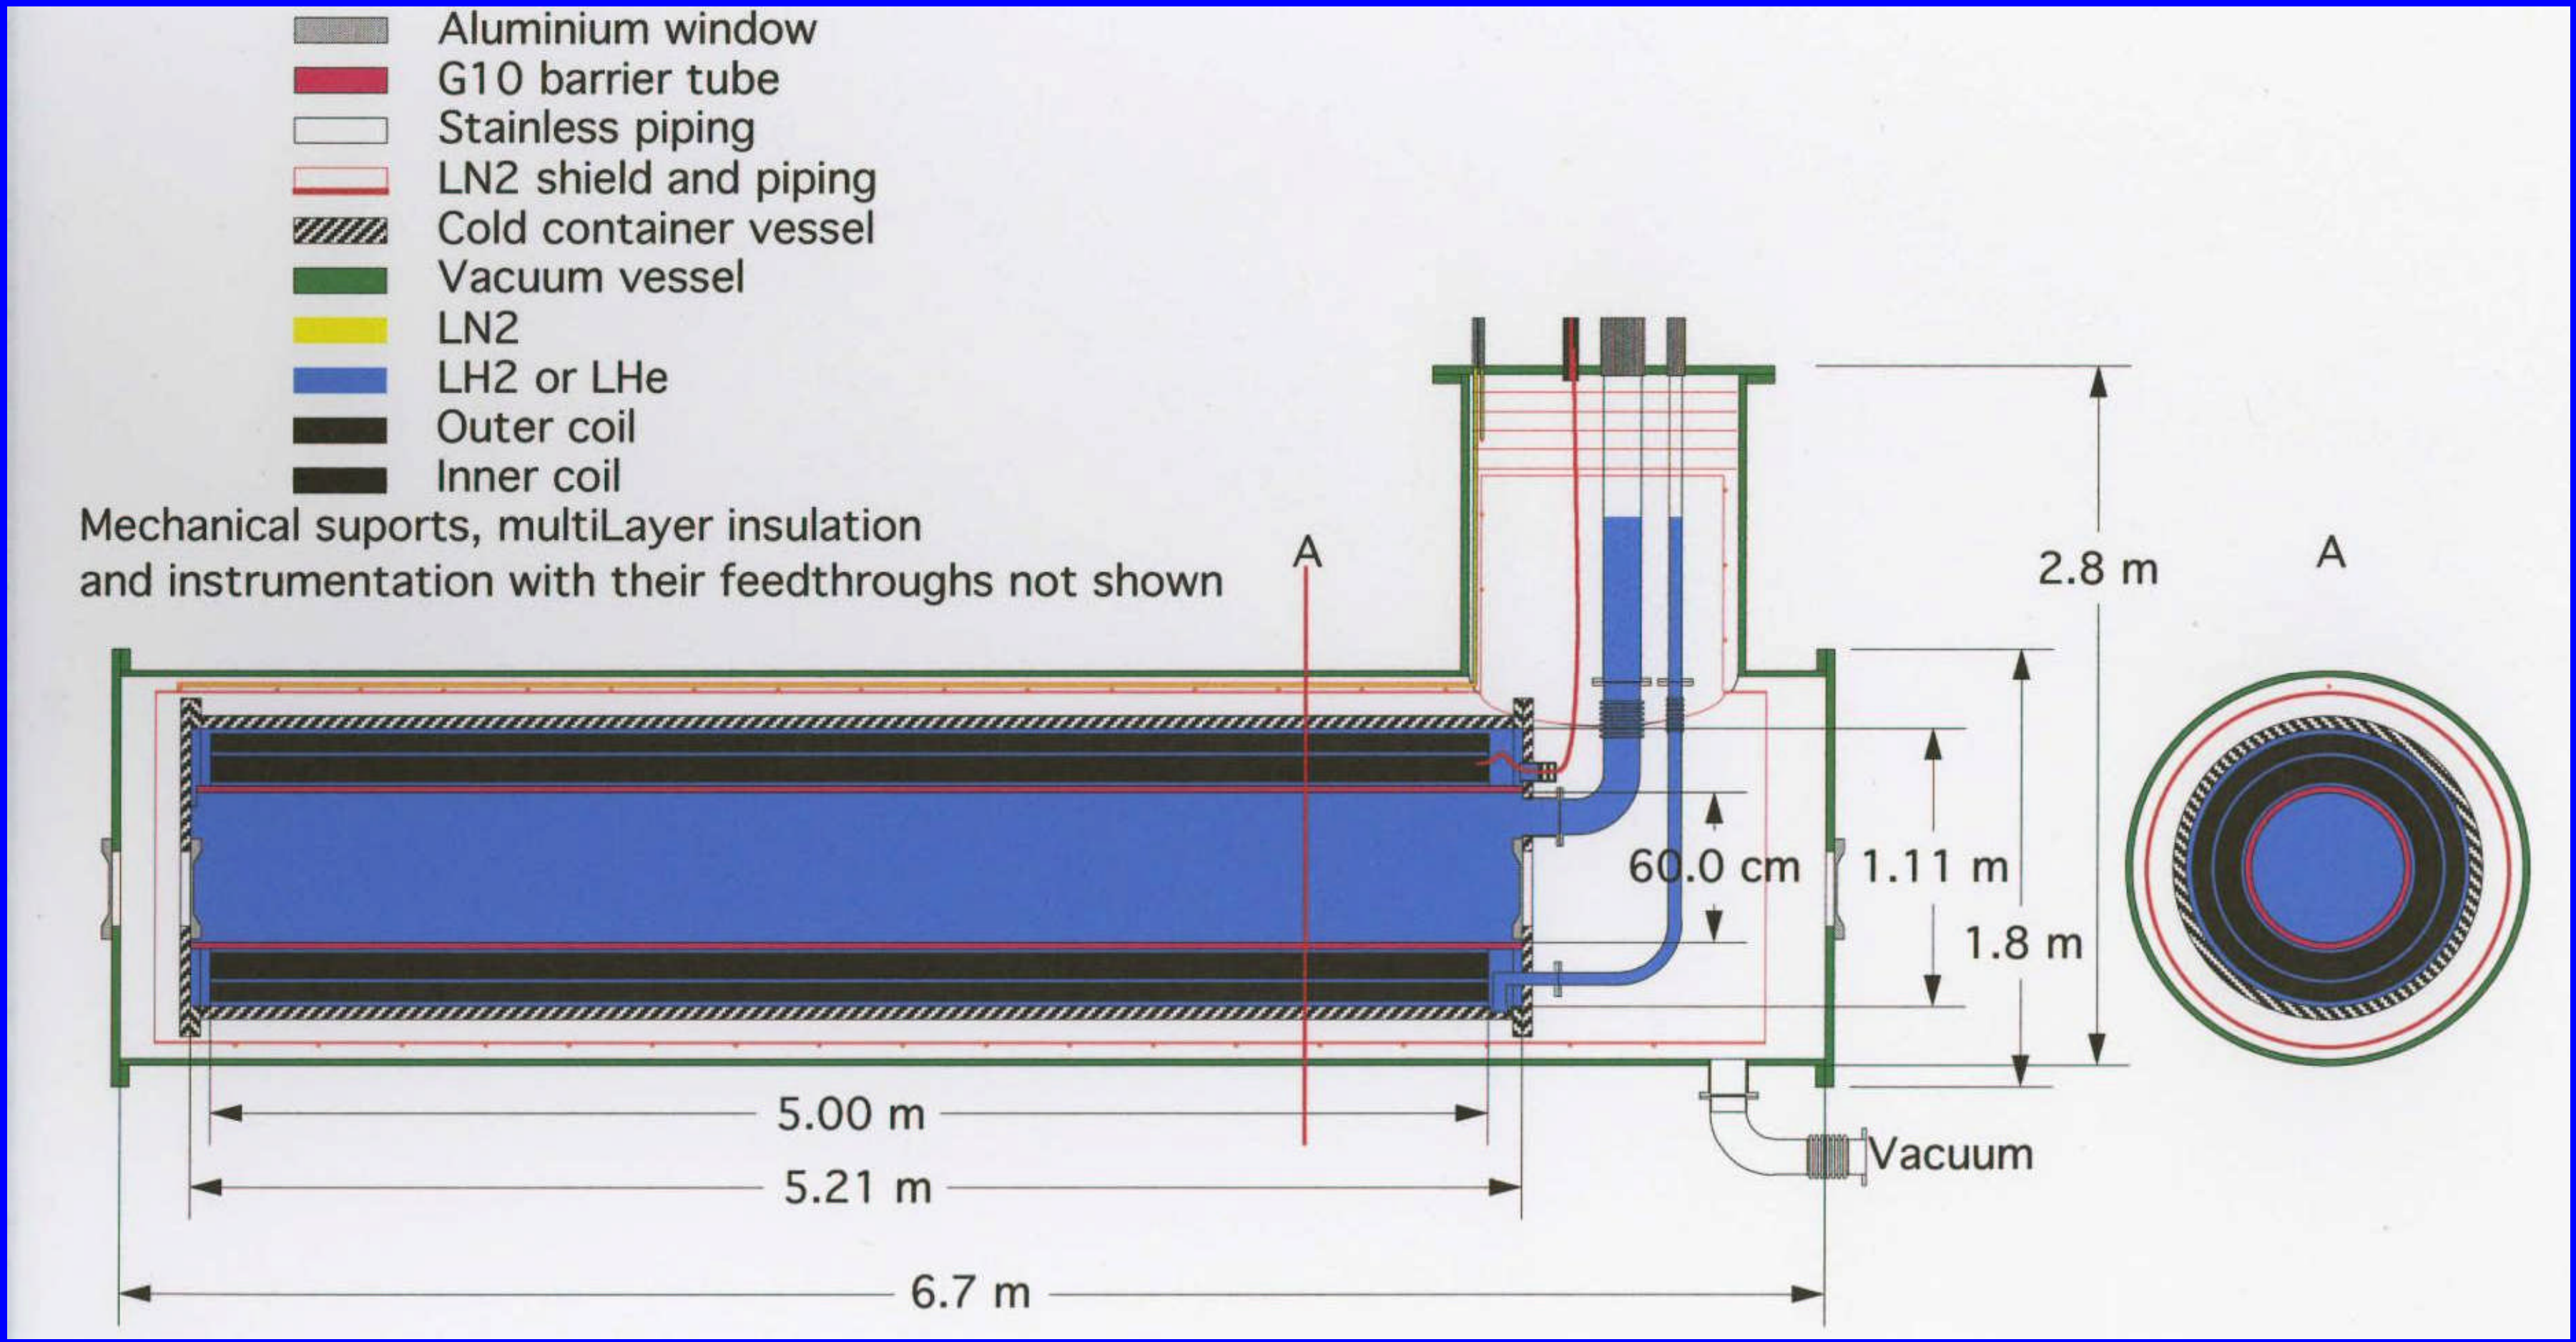

Five meter long MANX cryostat schematic.
The use of Liquid He at 4 K is possible, with Nb3Sn magnets.
Thin Al windows designed for MICE will be used.
(See talk by Mary Anne Cummings to follow)

Idea #6: Parametric-resonance Ionization Cooling (PIC)
Derbenev Talk to Follow (theory)!
See Beard poster P24 tomorrow (simulations)!

- Derbenev: 6D cooling allows new IC technique
- PIC Idea:
  - Excite parametric resonance (in linac or ring)
    - Like vertical rigid pendulum or ½-integer extraction
    - Use xx'=const to reduce x, increase x'
  - Use IC to reduce x'
  - Detuning issues being addressed
  - chromatic aberration example

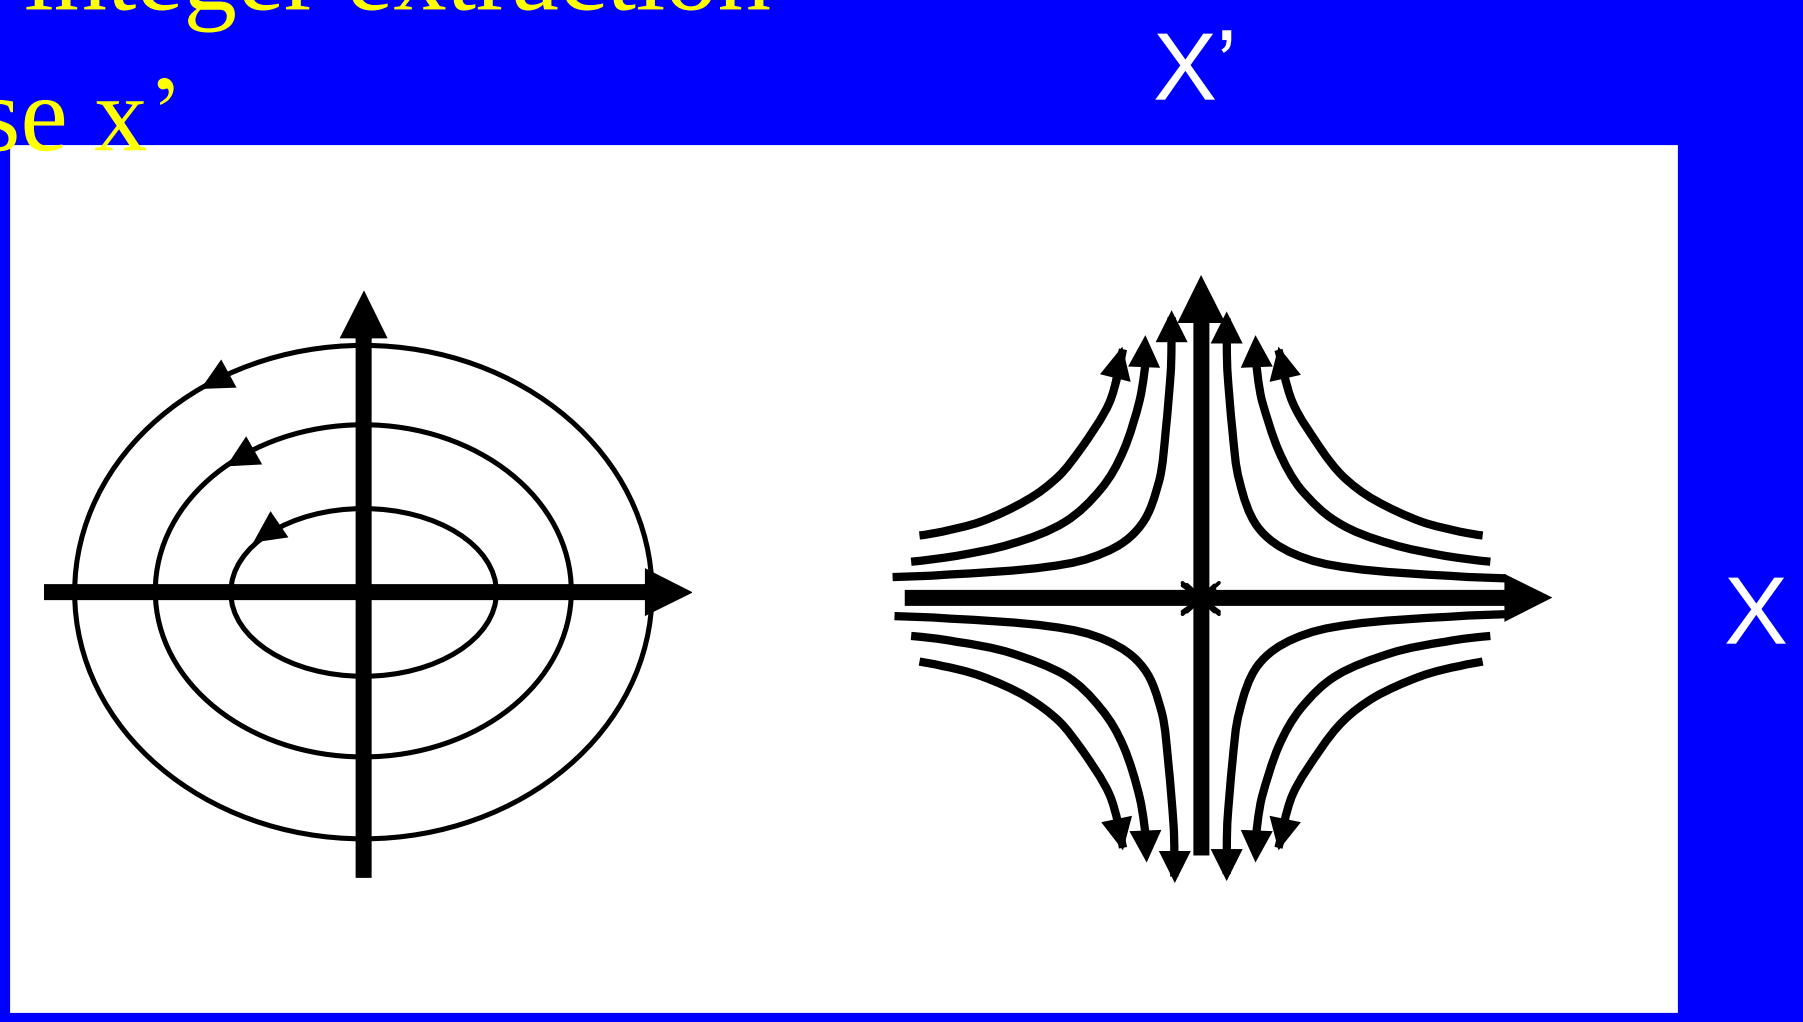

Yaroslav Derbenev et al., Ionization Cooling Using a Parametric Resonance, PAC05
Kevin Beard et al., Simulations of Parametric-resonance IC…, PAC05

Idea #7: Reverse Emittance Exchange
See Derbenev talk to follow!

- At 2.5 TeV/c, $\Delta p/p$ reduced by >1000.
- Bunch is then much shorter than needed to match IP beta function
- Use wedge absorber to reduce transverse beam dimensions (increasing Luminosity) while increasing $\Delta p/p$ until bunch length matches IP
- Subject of new STTR grant

Figure 1. Emittance Exchange

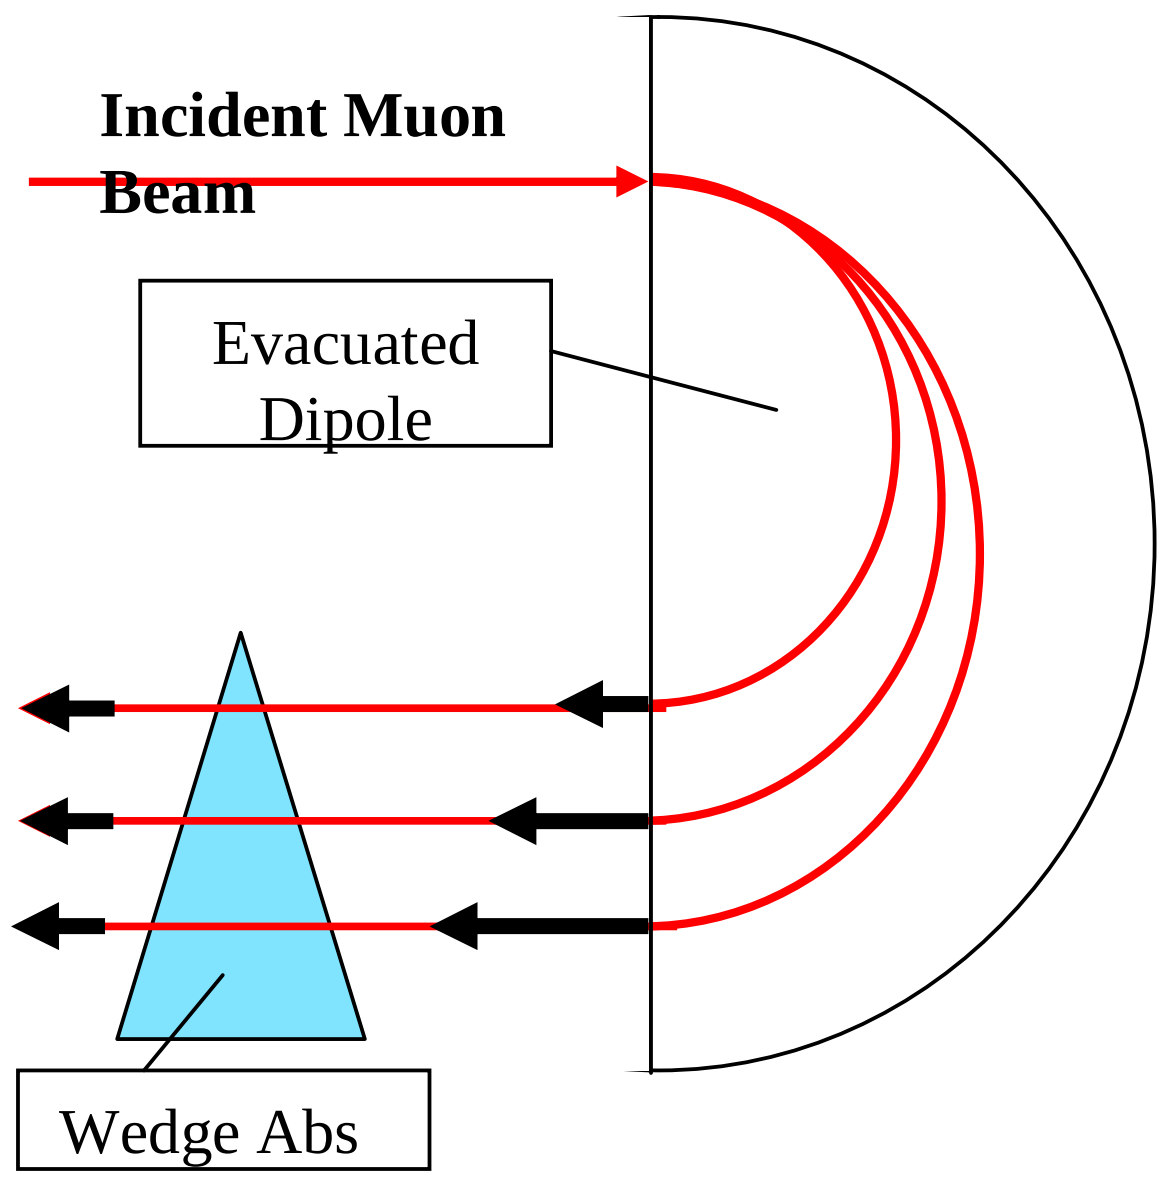

Figure 2. Reverse Emittance Exchange

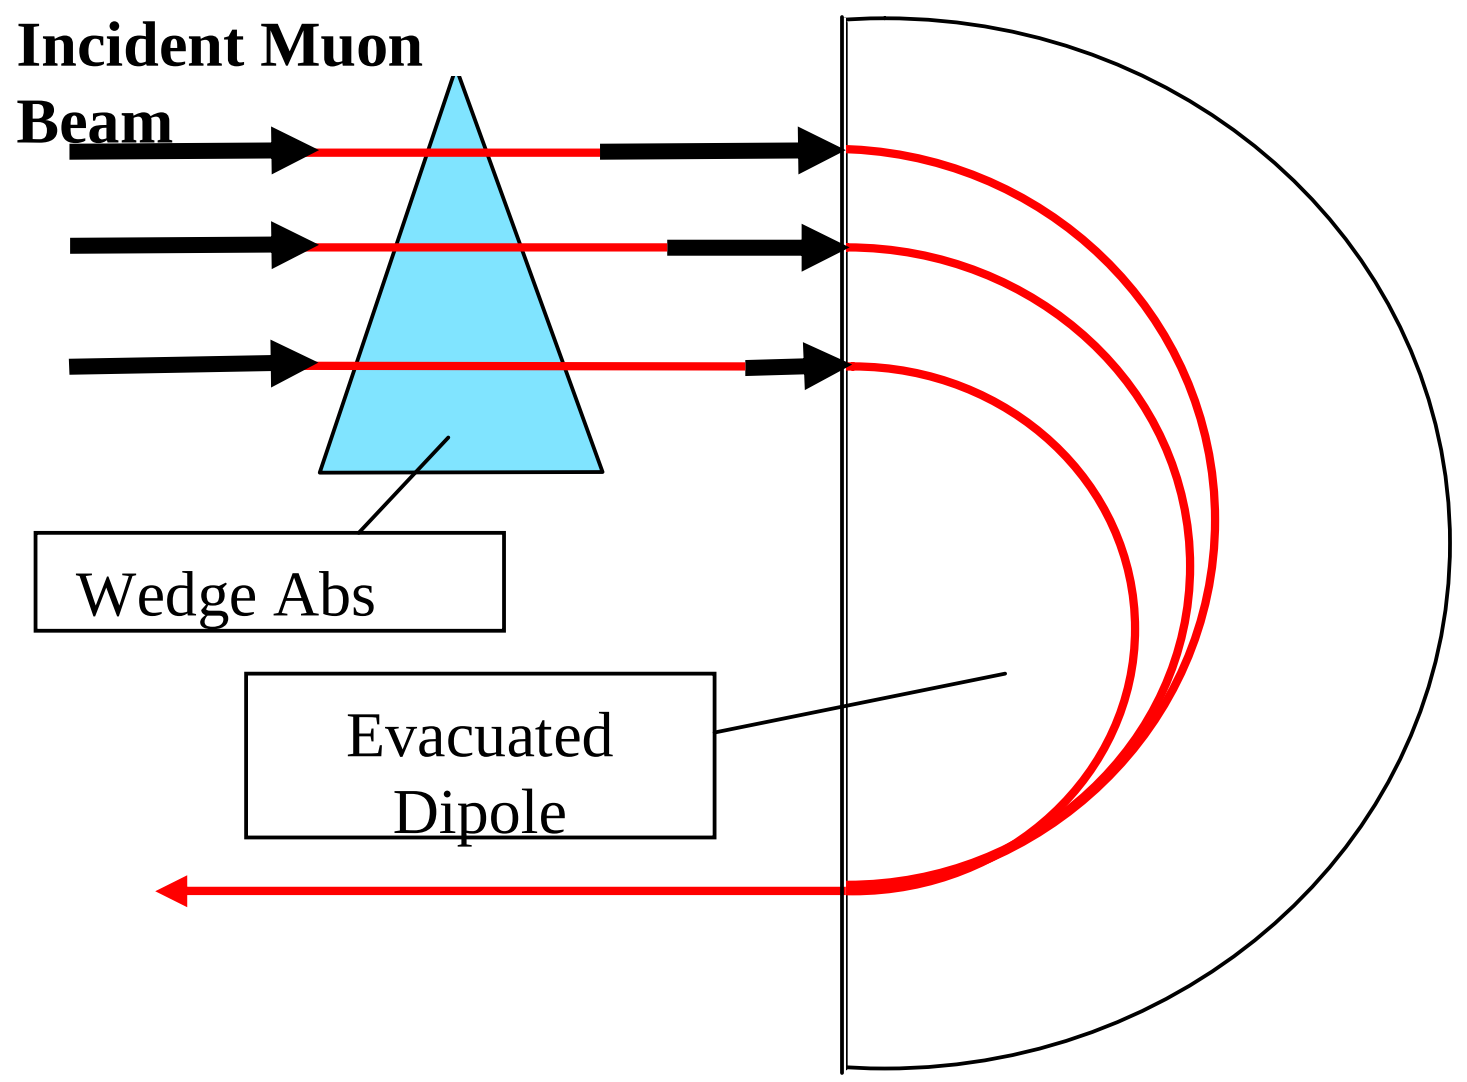

Figure 1. Conceptual diagram of the usual mechanism for reducing the energy spread in a muon beam by emittance exchange. An incident beam with small transverse emittance but large momentum spread (indicated by black arrows) enters a dipole magnetic field. The dispersion of the beam generated by the dipole magnet creates a momentum-position correlation at a wedge-shaped absorber. Higher momentum particles pass through the thicker part of the wedge and suffer greater ionization energy loss. Thus the beam becomes more monoenergetic. The transverse emittance has increased while the longitudinal emittance has diminished.

Figure 2. Conceptual diagram of the new mechanism for reducing the transverse emittance of a muon beam by reverse emittance exchange. An incident beam with large transverse emittance but small momentum spread passes through a wedge absorber creating a momentum-position correlation at the entrance to a dipole field. The trajectories of the particles through the field can then be brought to a parallel focus at the exit of the magnet. Thus the transverse emittance has decreased while the longitudinal emittance has increased.

Idea #8: Simultaneous RF Capture, Bunch Rotation and Cooling in HP RF Cavities

- Proton bunches have $\sigma_t \approx$ 1ns such that produced pion bunches do too.
- Placing RF cavities close to the production target allows 1/4 synchrotron period rotation to get longer pion bunches with smaller momentum spread.
- Subject of new STTR grant to use HP RF

  (see Dave Neuffer & Kevin Paul)

Eight New Ideas for Bright Beams for High Luminosity Muon Colliders

supported by SBIR/STTR grants

H_2-Pressurized RF Cavities
Continuous Absorber for Emittance Exchange
Helical Cooling Channel
Z-dependent HCC
MANX 6d Cooling Demo
Parametric-resonance Ionization Cooling
Reverse Emittance Exchange
RF capture, phase rotation, cooling in HP RF Cavities

If we succeed to develop these ideas, an Energy Frontier Muon Collider will become a compelling option for High Energy Physics!

Muons, Inc.

Strategy for Muon Cooling R&D

- Invent/develop new techniques for SBIR support
- Develop MANX 6D Cooling demonstration experiment
  - Propose to Fermilab next year (could be done at RAL)
- Develop effective muon beam cooling for a SC Linac for a neutrino factory
  - Put a neutrino factory with beam cooling on the path toward a collider
  - Additional argument for a SC Linac proton driver
- Develop effective beam cooling for an energy frontier muon collider
  - SC RF implies ILC becomes International Lepton Collider
  - Best hope for getting back to the Livingston curve
- Any Help greatly appreciated!